

# Engineering With Nature® + Landscape Architecture New Jersey Back Bays

a report identifying design concepts for incorporating Engineering With Nature® and Landscape Architecture approaches into US Army Corps of Engineers project infrastructure




US Army Corps  
of Engineers®



**Final Version** issued 10 June 2020



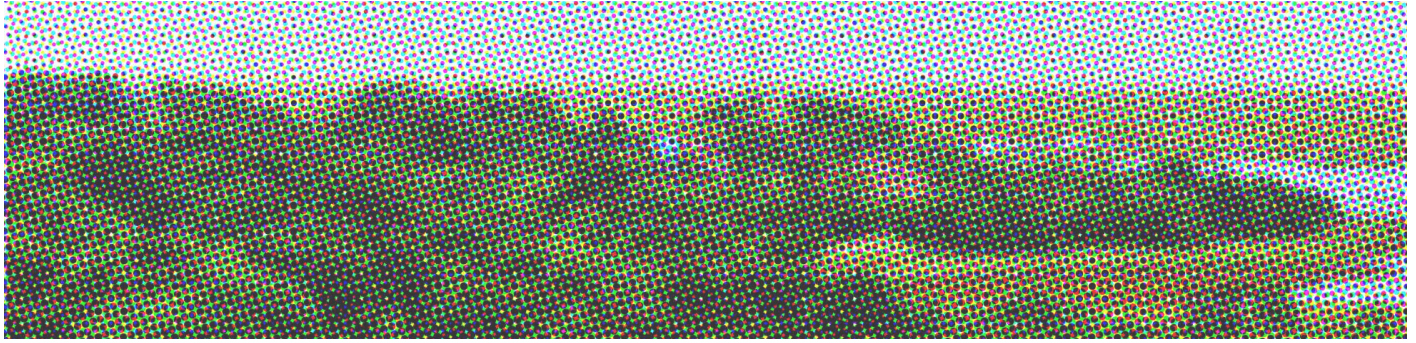

#### **Engineering With Nature®**

Dr. Todd Bridges  
Dr. Jeff King  
Dr. Candice Piercy  
Dr. Burton Suedel  
Dr. Carra Carrillo  
Dr. Joe Gailani  
Dr. Catie Dillon  
Brian Durham

#### **Auburn University**

Rob Holmes (PI)  
Keena Miles  
Riffat Farjana  
Romina Delgado

#### **Participating District**

Philadelphia District

#### **University of Pennsylvania**

Sean Burkholder (co-I)  
Yang Du  
Rob Leventhal

#### **University of Toronto**

Justine Holzman (co-I)  
Elspeth Holland  
Emiley Switzer-Martell  
Michael Wideman

#### **Dredge Research Collaborative**

Gena Wirth

#### **Cite this report:**


Holmes, R., Burkholder, S., Holzman, J., and Wirth, G. (2020) Engineering with Nature + Landscape Architecture, Vol. II: New Jersey Back Bays. Report prepared for Engineering With Nature Initiative, USACE Engineering Research and Development Center, Vicksburg, MS, <https://ewndev.el.erdc.dren.mil/designs.html>.

#### **Contact:**

Jeff King, Deputy National Lead, Engineering With Nature Initiative®, USACE  
[Jeff.K.King@usace.army.mil](mailto:Jeff.K.King@usace.army.mil)

Rob Holmes, Assistant Professor, School of Architecture, Planning, and Landscape Architecture, Auburn University  
[rob.holmes@auburn.edu](mailto:rob.holmes@auburn.edu)



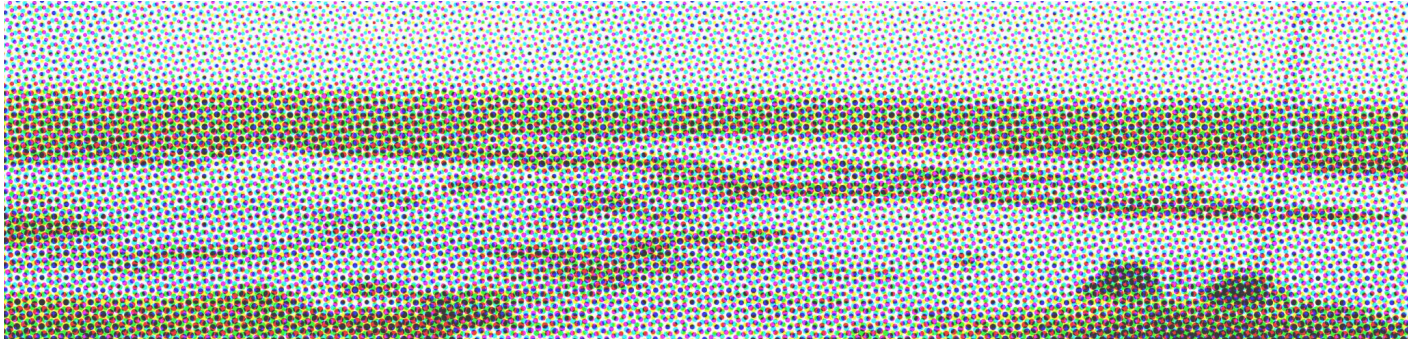

This report covers findings from cooperative agreement W912HZ-18-2-0008 **Incorporating Engineering With Nature® (EWN®) and Landscape Architecture (LA) Designs into Existing Infrastructure Projects**, an agreement between the **U.S. Army Engineering Research Development Center (ERDC)** and **Auburn University (AU)** for FY2020.

This report has been prepared by the investigators at **Auburn University**, the **University of Pennsylvania**, and the **University of Toronto** and consultants from the **Dredge Research Collaborative**; it also incorporates concepts and text from ERDC's **Engineering With Nature®** project team.

**Engineering With Nature®** is the intentional alignment of natural and engineering processes to efficiently and sustainably deliver economic, environmental, and social benefits through collaborative processes.

Sustainable development of water resources infrastructure is supported by solutions that beneficially integrate engineering and natural systems. With recent advances in the fields of engineering and ecology, there is an opportunity to combine these fields of practice into a single collaborative and cost-effective approach for infrastructure development and environmental management.

**The Dredge Research Collaborative** is an independent 501c3 nonprofit organization that investigates human sediment handling practices through publications, an event series, and various other projects. Its mission is to advance public knowledge about sediment management; to provide platforms for transdisciplinary conversation about sediment management; and to participate in envisioning and realizing preferred sedimentary futures.

<http://engineeringwithnature.org>  
<http://dredgeresearchcollaborative.org/>





## **table of contents**

<b>EXECUTIVE SUMMARY</b>	<b>7</b>
<b>INTRODUCTION</b>	<b>11</b>
<b>PART I</b> REGIONS AND INITIAL NNBF APPLICATIONS	<b>23</b>
<b>PART II</b> DESIGN CONCEPTS	<b>37</b>
<b>PART III</b> MODELING NNBF PERFORMANCE AND SUITABILITY	<b>84</b>
<b>PART IV</b> PAIRING NONSTRUCTURAL MEASURES WITH NNBF	<b>99</b>
<b>PART V</b> INITIAL QUALITATIVE COST INVESTIGATIONS	<b>124</b>
<b>REFERENCES</b>	<b>132</b>
<b>APPENDIX 1</b>	<b>134</b>
<b>APPENDIX 2</b>	<b>152</b>







# Executive Summary

The five counties of the New Jersey Back Bays region, Monmouth, Ocean, Atlantic, Burlington, and Cape May, are home to nearly two million people. Many of these people live in communities that are on or near the edge of the tidal waterbodies, that lie between the Atlantic Ocean barrier islands and the New Jersey mainland, such as Barnegat Bay, Great Bay, and Great Egg Harbor Bay. While the oceanward edges of the barrier islands are well-protected by existing Coastal Storm Risk Management (CSRM) features, the back bay region lacks a comprehensive CSRM program. Consequently, the region has proven vulnerable to impacts from storms, including the recent Hurricane Sandy. On-going sea level rise, the degradation of coastal ecosystems, and aging infrastructure systems make addressing the region's vulnerabilities urgent.

The US Army Corps of Engineers' (USACE) New Jersey Back Bays CSRM Feasibility Study (NJBB CSRM FS) is intended to address this need. This Engineering With Nature and Landscape Architecture (EWN-LA) New Jersey Back Bays document summarizes work done within the context of that study to develop design concepts for Natural and Nature-Based Features (NNBF) that can contribute to the larger Feasibility Study's holistic CSRM objectives. NNBF such as constructed marsh islands, 'living breakwaters', and horizontal levees have the potential to provide CSRM value while also providing valuable habitat, strengthening ecosystem function, offering recreational opportunities, and contributing to the aesthetic quality of the Back Bays. Depending on local circumstances, NNBF can be deployed in place of other CSRM measures, such as structural measures, or to augment them.

The work summarized in this EWN-LA NJBB document has taken place between July 2019 and April 2020. The process launched with a workshop hosted by the Philadelphia District (NAP), in which an array of potential design concepts were developed for further consideration. These concepts are summarized in *Part I: Regions and Initial NNBF Applications*, which includes tables listing all of these concepts and maps locating their potential locations within the four study regions defined in the NJBB CSRM FS.

*Part II: Design Concepts* describes in greater detail seven of the design concepts that were prioritized for further study: the (1) Ocean City Horizontal Levee, (2) Lagoon Community Protection, (3) Coastal Lakes Terracing, (4) Tuckerton Peninsula Barrier, (5) Beach Haven Surge Filter, (6) Seven Mile Island Innovation Lab (SMIIL), and (7) Barnegat Bay Shallowing. SMIIL is a current initiative between the State of New Jersey,

The Wetlands Institute, and the USACE. The Barnegat Bay Shallowing design concept considers a broad scale application of NNBF for combined CSRM benefits.

The third section of this report, *Part III: NNBF Performance and Suitability: Linking Modeling to Design*, provides a brief overview of the work of the modeling team, which studied in depth three model areas, Holgate, Brigantine, and Great Egg. Two of the features from Part II, the Tuckerton Peninsula Barrier and Beach Haven Surge Filter, compose the Holgate model area. The model results indicate that NNBF can have significant CSRM effects, but these effects have the potential to be positive in some cases and negative in others. Further modeling and design is needed to explore alternatives and select NNBF configurations with the most beneficial effects. For in-depth presentation and discussion of the modeling results, see the separate report by the modeling team, “Enhanced Modeling in Support of Recommended EWN/NNBF Measures and Efficacy in Providing Flood/Storm Risk Reduction”. Part III also builds on those results to recommend a potential method for linking modeling to design efforts in future study of NNBF opportunities.

*Part IV: Pairing Nonstructural Measures with NNBF* explores the potential CSRM and ecological benefits of linking physical nonstructural measures, such as building retrofits or relocation, with NNBF. NNBF and nonstructural measures can often be mutually supportive. Acquisition, for instance, could be strategically deployed in flood-prone areas to provide upland migration space for marsh buffers. Part IV also discusses potential opportunities and pitfalls in planning such linkages.

The fifth section of the report, *Part V: Initial Qualitative Cost Investigations*, describes a general approach to cost estimation for NNBF. As most NNBF require large quantities of sediment for their construction, the core challenges to cost estimation identified center on the highly variable availability of sediment, associated variations in cost, and the logistical coordination of construction projects such as NNBF with on-going navigational maintenance dredging in the region. NNBF are an emerging category of CSRM measure, and practices for planning, constructing, and evaluating them are still evolving. Nonetheless, their capacity to deliver multiple benefits, potential to be integrated with on-going O&M work (navigational dredging), and ability to adapt dynamically over time to changing environmental conditions make them worth considering within the suite of available CSRM measures.



As a whole, this report is indicative of the range of types of NNBF that could be viable in the NJBB region and of the scales at which those features might be constructed. Further work should build on this report to refine, test, and design in greater detail. Potential next steps include:

- Linking modeling to design in the iterative development, selection, and refinement of NNBF, as described in Part III
- Further modeling to continue to establish CSRM benefits and prioritize NNBF; very large-scale strategies such as comprehensive Barnegat Bay shallowing could be examined
- Holistic planning to link NNBF with non-structural measures in a fashion that respects the varying needs, situations, and desires of communities throughout the Back Bays
- Analysis of the range of NNBF-like work underway in the Back Bays by other federal and state agencies, non-governmental organizations, and local entities including the examination of CSRM value and the potential for coordination
- Establishing linkages between NNBF strategies and ongoing O&M projects
- Further analysis of the ecological systems of the Back Bays, together with study of how short-term impacts of NNBF construction might be mitigated and how long-term benefits might be maximized; this could be done in consultation with resource agencies and the local scientific research community
- Analysis and prioritization of NNBF relative to spatialized Relative Sea Level Rise (RSLR) projections, with particular attention to marsh migration capacity
- Coordination with and outreach to local communities







# Introduction

This report concerns the development of innovative design concepts for the New Jersey Back Bays Flood Risk Management Feasibility Study (NJBB), which is a project of the Philadelphia District (NAP) of the US Army Corps of Engineers (USACE). These design concepts combine Engineering With Nature® (EWN®) approaches to infrastructure design with landscape architectural (LA) approaches to infrastructure design in order to identify opportunities to incorporate “Natural and Nature-Based Features” (NNBF) into proposed NAP project infrastructure.

As described by the EWN® initiative, NNBF “are landscape features that are used to provide engineering functions relevant to flood risk management, while producing additional economic, environmental, and/or social benefits. These features may occur naturally in landscapes or be engineered, constructed and/or restored to mimic natural conditions. A strategy that combines NNBF with nonstructural and structural measures represents an integrated approach to flood risk management that can deliver a broad array of ecosystem goods and services to local communities.”

The described in this report has focused on NNBF that can offer coastal storm risk management (CSRM) value in the context of the alternatives defined in the NJBB CSRM Interim Feasibility Study and Environmental Scoping Document, which was issued on March 1, 2019. These NNBF have been evaluated and selected for their potential to combine CSRM value with additional ecological and social benefit, such as the provision of marsh habitat and opportunities for recreational use.

## Background

This report has been produced as part of a larger collaborative project, which we refer to as the Engineering With Nature®-Landscape Architecture (EWN-LA) initiative. This initiative emerged in response a workshop held at the USACE Engineering Research and Development Center (ERDC) in Vicksburg, Mississippi in Summer 2017. In that workshop, personnel from the USACE, members of the Dredge Research Collaborative, and a diverse group of landscape architects identified opportunities to integrate EWN® and LA approaches into new and existing water infrastructure projects and operations.

Engineering With Nature® is an initiative of the US Army Corps of Engineers. It is the intentional alignment of natural and engineering processes to efficiently and sustainably deliver economic, environmental, and social benefits through collaborative processes.

In the EWN® approach, sustainable development of water resources infrastructure is supported by solutions that beneficially integrate engineering and natural systems. With recent advances in the fields of engineering and ecology, there is an opportunity to combine these fields of practice into a single collaborative and cost-effective approach for infrastructure development and environmental management.”

EWN® outcomes are “triple-win”, which means that they systematically integrate social, environmental, and economic considerations into decision-making and actions at every phase of a project, in order to achieve “innovative and resilient solutions” that are more socially acceptable, viable, and equitable, and, ultimately, more sustainable.

As a field, landscape architecture is presently concerned with many of the same issues of infrastructural performance and potential that EWN® is currently pursuing, including in particular the re-imagination of existing infrastructure to meet more diverse criteria encompassing engineering functions, ecological value, recreational opportunities, and aesthetic benefits (Spirn 1984, Mossop 2006, Orff 2016, Belanger 2017). This overlap in concerns suggests that the design principles and precedent knowledge summarized as EWN® approaches may be beneficially combined with the design principles and precedent knowledge that has been accumulating in landscape architectural approaches to infrastructure, such as the work of landscape architects on recent international design competitions that deal with issues of coastal storm protection, public space, and ecological performance, like Rebuild by Design NYC and the Resilient by Design Bay Area Challenge. Moreover, landscape architects bring additional methods and expertise, including design, representation, and communication skills, that can aid in achieving the shared goals of EWN® and landscape architecture.

The members of the Dredge Research Collaborative, including the DRC-associated faculty from Auburn, Toronto, and Penn working on this project, work in precisely



this area of contemporary landscape architecture, with a particular focus on coastal and riverine infrastructures that interact with sediment systems, and are correspondingly able to bring familiarity with both the challenges and the opportunities inherent in deploying EWN® approaches to water infrastructure.

## **Context**

### **NJBB CSRM context**

This draft report is intended to demonstrate the scope and breadth of NNBF possibilities within the context of the *NJBB CSRM Interim Feasibility Study and Environmental Scoping Document*. Because of this, it has focused on NNBF that combine the potential for strong CSRM benefits with ecological and social benefits.

The CSRM value provided by NNBF (and by features that hybridize NNBF and structural approaches) does differ from the value provided by traditional structural measures. NNBF have the advantage of providing multiple kinds of benefits and, because they incorporate dynamic natural processes, are in some cases capable of adapting to changing environmental conditions. Marshes, for instance, can accrete, potentially keeping pace with relative sea-level rise (RSLR). However, NNBF typically perform best when paired with non-structural measures such as buyouts and relocation, as NNBF require migration space over time to perform their natural adaptations.

In the context of the NJBB region, some of the most valuable CSRM benefits that are possible through NNBF come by way of creating, enhancing and/or bolstering the existing systems of islands and marshes. The scientific literature supporting the CSRM benefits of vegetated coastal systems has been growing both in the United States and in Europe. This literature is aided by field-verified observations from well-monitored storms. Work done in the United States, led primarily by researchers with the USACE has both modeled and observed storm-associated water-level reductions of 1 meter across marsh expanses ranging from 6 to 60km depending on local conditions and storm type (Wamsley et al., 2010). Another report (Wu et al., 2015) concluded that, while highly variable, vegetation in their numerical tests provided as much as 37% reduction in storm surge water levels. In Europe, a physical flume was used to study the effects of salt marsh on wave reductions and concluded that up to 60% of the reduction they saw in their test could be attributed to vegetation. They stated that their findings “support the incorporation of salt marshes into coastal protection schemes” (Moller et al., 2014). Studies in Holland have also concluded that vegetated foreshores on dikes could reduce wave height between 25 to 50% and serve as a natural reinforcement (Vuik et al., 2016). Studies in New Jersey regarding the cumulative reductions in property damage related to the presence of wetlands estimated that damage during Hurricane Sandy was reduced by 27%, equating to \$430 million (Narayan et al., 2017). While the results of these studies are all prefaced with considerable contextual assumptions and thus do not provide the ability to extract specific generalizable predications as to how effective vegetated marshes




are at reducing storm surge and wave risk, as a body of research they do all confirm that there is some reduction and that marshes are clearly valuable to some degree as a CSRM strategy.

*The Interim Feasibility Study* describes and evaluates a range of structural measures for the New Jersey Back Bays, including inlet storm surge barriers, levees, floodwalls, seawalls, and revetments. This draft report refers to these measures in a number of places, and the NNBF described within it have been developed within the context of these proposed measures. The study of non-structural measures, particularly as they can be paired with NNBF, would help to round out the full range of possibilities being considered.

### Workshops and process

This EWN-LA study has been a collaborative effort by the members of the project delivery team (PDT), which includes personnel from NAP, EWN, the grant investigators, their staff, and consultants.

The PDT's first stage of work was a workshop, hosted by NAP, which took place on July 30 and 31, 2019. During the workshop, the PDT worked to identify issues and opportunities associated with each of the project regions, as well as general NNBF strategies that might respond to those issues and opportunities. (These strategies are summarized on pages 18-31.)

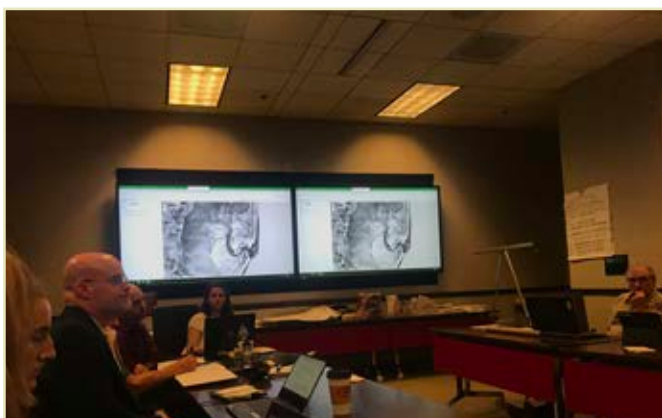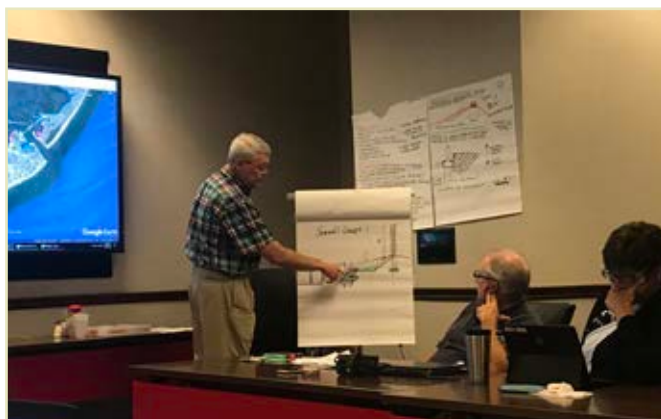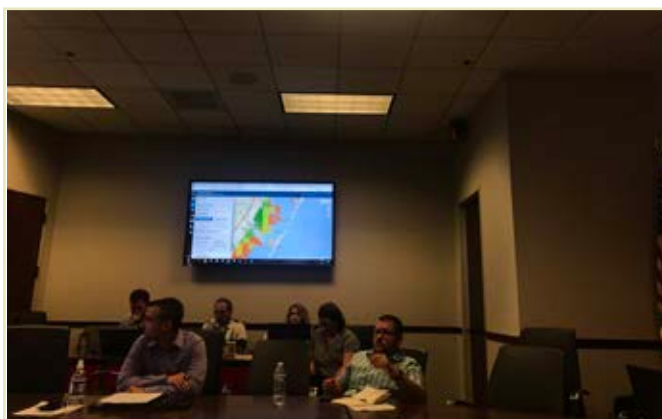



A follow-up workshop took place from September 20-23, 2019. During this workshop, the PDT reviewed a matrix of strategies in order to prioritize key strategies for advancement as design concepts, discussed on-going modeling efforts, made a series of visits to potential NNBF sites in the Back Bays, and worked to refine the prioritized design concepts. Based on this prioritization, the EWN-LA team produced a series of draft products, which were presented to the full PDT via webinar on October 16, 2019. A draft report was issued in February 2020, followed by this final report in May 2020.

### **Report Contents**

The pages that follow in this report summarize the current state of this NNBF R&D study. First, a series of spreads describe the ecological context of the New Jersey Back Bays, organized by the plant communities and significant animal species that NNBF have the potential to positively impact. This ecological context is followed by a NNBF Glossary, which describes via text and diagram key types of general NNBF strategies, such as “horizontal levees”, which are relevant to the Back Bays.

Specific NNBF recommendations follow in five parts. Part I is a summary of strategies considered in the July and September workshops, organized by the four study regions of the feasibility study. Part II is a detailed exploration of some of the NNBF that have been prioritized by the PDT and selected for advancement as design concepts, including in particular NNBF that are also being explored through modeling at ERDC. Part III covers the remainder of the prioritized NNBF, which were studied by the modeling team. Part IV explores potential opportunities for linking nonstructural measures to NNBF. Finally, Part V discusses initial qualitative cost estimate procedures, provides area takeoffs for the NNBF in Part II, and helps to define the habitat creation value of those NNBF.

## Ecological Context

Ecologically, the study area of the *NJBB CSRM Interim Feasibility Study and Environmental Scoping Document* is composed primarily of the Coastal Salt Marsh plant community, although portions of the area also include Coastal Sand Dune and Upland Forest communities. The continued existence of these plant communities, and the affiliated animal communities who depend on them, is threatened by sea level rise and strengthened storms associated with climate change. The coast of New Jersey already shows signs of these changes. For instance, “ghost forests” of dead trees, unable to tolerate the intrusion of saltwater, are prevalent in many locations. Similarly, Saltmarsh Sparrow (*Ammodramus caudacutus*) populations are declining rapidly due to unpredictable water levels drowning hatchlings and the disappearance of healthy continuous stands of marsh in many regions of the Back Bays.

Healthy ecosystems and plant communities like the Coastal Salt Marsh are important for their economic value in tourism revenue and food production, their ability to mitigate and buffer storms from reaching coastal homes, and their intrinsic value. Engineered solutions to combat sea level rise and protect against natural disasters like hurricanes should therefore strive to incorporate and consider NNBF in their future projects in order to protect and bolster the important habitats these marshes represent.

## FLORA

### Coastal Salt Marsh

Coastal Salt Marsh is a plant community always on the move, expanding from the accretion of dead plant materials, and now more commonly shrinking from erosion by sea level rise. The vegetation of coastal salt marshes is dominated by halophytes – plant species that can tolerate the constant or temporary inundation of salt water in soil. Though plant cells normally wither in the presence of salt, halophytes are extremely adapted to this difficult growing condition. Below the mean tide level, Sea Lettuce, *Ulva lactuca*, can be established in mudflat conditions and deeper still, in waters up to 3 meters, Eel Grass, *Zostera marina*, can be found. The number of terrestrial halophytic species are not numerous and two species tend to dominate this niche: Smooth Cordgrass, *Sporobolus alterniflorus* (previously known as *Spartina alterniflora*), and Saltmeadow Cordgrass or Salt Hay, *Sporobolus patens* (previously *Spartina patens*). The two grasses look relatively similar to the untrained eye, and the coastal salt marsh tends to look like a monoculture of a green grass. However, the two grasses can be easily identified by their location in the Coastal Salt Marsh and their height. *Sporobolus alterniflorus* is generally found closer to the water’s edge and tends to grow to a height of 3 to 8 feet. *Sporobolus patens* is found at a higher marsh elevation and has less contact with the faster moving water. This species height never exceeds more than two feet.

At higher elevation points within the marsh where salt intrusion is less constant, other



less numerous species can be found including Spike Grass, Black Grass, Sea Lavender, Seaside Mallow, Slender Glasswort, Woody Glasswort, Salt Marsh Fleabane, Orache, Perennial Salt Marsh Aster, Tall Sea-Blite, Low Sea-Blite, and Salt Marsh Sand Spurrey. Towards the coast and on more elevated islands, the presence of native Cattail and the invasive Phragmites can be found in large stands when salt water is mostly out of the reach of roots, aside from rare inundation.

At the border of Coastal Salt Marsh and the neighboring plant community, shrubs and vines can be found, including Marsh Elder, Groundsel Bush, and Bay Berry. Additional herb species in this zone include Seaside Goldenrod, Salt Marsh Bulrush, Salt Marsh Cockspur Grass, Sea-Pink, Seaside Gerardia, and Beaked Spike Rush.

With changing salt concentration in the Back Bays, higher water levels, and more constant storm surge into areas not evolved for high salt concentrations, this plant community is in flux and species are attempting to adjust to unprecedentedly rapid change in environmental conditions. Aiding species movement and rebuilding soil heights in future projects will be imperative to maintaining a healthy Coastal Salt Marsh plant community.

### **Coastal Sand Dune**

Almost exclusively found on barrier islands, Coastal Sand Dunes are created and modified daily by wind, tides, and storms. Due to the creation of ridges and hollows between dunes, a wide range of environmental stresses of salt spray, saltwater, moisture, and wind is found within this plant community. Consequently, it is further broken down into four general vegetation types: Dunegrass, Beach Heather, Shrub Thicket, and Dune Woodlands.

#### *Dunegrass Community*

This community is found on the primary foredunes facing the ocean. Environmental stresses like salt spray, sand movement and extreme wind make it very hard for many plant species to thrive here. Only around 10% of the foredune is typically vegetated with Dunegrass, *Ammophila breviligulata*, being the most common native species. The Asiatic Sedge, *Carex kobomugi*, has begun to rival dunegrass and also characterize this community. Less common species include Sea Rocket, Sea-Beach Panic-Grass, Seaside Spruce, Sandbur, Beach Pea, Long-Spined Sandburg, Cocklebur, Saltwort, Sand Grass, Seaside Goldenrod, and the introduced Dusty Miller.

This community is important for combating storm surge. While many of the remaining habitats in the Coastal Sand Dune have been lost due to development, the Dunegrass Community is recognized for its ability to mitigate flooding. Efforts are constantly being made to replant these dunes and keep people from walking on them. Healthy stands of Dunegrass help trap even more sand, leading to taller dunes and more protection during

storms.

The following communities, Beach Heather, Shrub Thicket, and Dune Woodlands are now quite rare due to the development of the barrier islands. These communities are almost entirely found within nature preserves.

#### *Beach Heather*

Found on the backside of the primary and secondary dune Beach Heather the most abundant species in this area can occur in great stands. Sea Beach Three-awn, Switch Grass, Little Bluestem, Sandgrass, Beach Pinweed, Prickly Pear, Sedge spp., Virginia Creeper, and Poison Ivy are also common in this area alongside the Dunegrass community.

#### *Shrub Thicket*

With an increase in moisture and decrease in salt spray, a shrub thicket is the first community of woody plants from the ocean. The shrub thicket community can vary greatly depending on amount of moisture. True to its name, the thicket is composed of vines, shrubs, and small trees, growing in a dense tangle of plants. It is quite rare due to development. Common tree species include Red Cedar, Black Cherry, and American Holly. Stunted Red Maples can also be found. Shrub and vine species include: Scrub Oak, Bay Berry, Shadbush, Highbush Blueberry, Arrowwood, Virginia Creeper, Greenbrier, Poison Ivy, Highbush Blue Berry, and Beach Plum. Herbs include many from the Beach Heather community and Dunegrass community. Additionally, Prickly Pear and even fern species can be found here.

#### *Dune Woodlands*

In the most protected areas of the barrier islands, Dune Woodlands exist. With freshwater, a lack of salt spray, and less wind, tall trees start to appear. This community consists of American Holly, Black Cherry, Sassafras, Red Cedar, Red Maple, Pitch Pine, and Hackberry, which can all grow to impressive heights. Vines can grow to the tree tops, creating a dense forest. These woodlands are susceptible to salt water intrusion and Hurricane Sandy transformed many Dune Woodland Communities into ghost forests.

### **Upland Forests**

Moving upland from the Coastal Salt Marsh, Upland Forest will generally be the next community present. Two upland communities that are common in the inner coastal plain are Sweetgum Successional Forest and Virginia Pine Successional Forest, which are both named for their most dominant tree species. While these are both successional forest and will likely mature into a mixed oak plant community, they are currently the most dominant types as much of the inner coastal plain was originally used for agricultural



land and is just now returning to forest. In both of these successional communities, pines, hickories, oaks, American Holly, and Sassafras are quite common.

## **FAUNA**

The New Jersey Back Bay is home to many species. Fish, bivalves, crustaceans, insects, mammals, reptiles, and birds all call this area home. Many migrating species of birds can also be found feeding, resting, or nesting here at some point in the year. A few species of key concern are noted below.

### *Black Skimmer*

A unique seabird with an identifiable flying pattern and odd beak shape which skims the surface of the water in search of fish. This species is of concern due to its decreasing population from habitat loss. This species breeds on gravel and sandy bars and beaches. This species is listed as endangered in New Jersey.

### *Saltmarsh Sparrow*

A sparrow which are restricted to tidal saltmarshes. These birds are in rapid decline due to predation of eggs by the introduced red fox. Additionally, these species lay their nest just 2 to 10 cms above the tide level in *Sporobolus patens* to hide from predators. However, with sea level rise and a new frequency of storms, the offspring are drowning. It is predicted that a threshold of sea level rise will soon be reached and these birds will become extinct in less than 20 years following that threshold.

### *Red Knot*

A beautiful bird considered a near-threatened species. This species eats horseshoe crab eggs. The new stricter fishing regulations on horseshoe crabs in New Jersey in place may help this species rebound. Climate change, sea level rise, and hunting for both food and sport are reasons for this species' decline.

### *American Oystercatcher*

While the population of American Oystercatchers are considered stable, they are in decline and listed as a species of "special concern" in New Jersey, one of their most important habitats. These birds nest in the back bay marshes of New Jersey and similar habitats on the East Coast.

### *Piping Plover*


This charismatic bird is often seen at the waters edge running up and down the beach and back bay. They nest on bare sand and are therefore under great pressure from coastal development and tourists. Listed both in New Jersey and federally as endangered.

# NNBF GLOSSARY

A collection of NNBF strategies are being considered and developed for this report. These strategies have come about through discussions of performance, cost, and location preference by the PDT. While the following list is not exhaustive of all possible NNBF strategies, they are representative of many of those under consideration in this report. These are not proposals for specific projects but are general descriptions of terms and concepts used elsewhere in this report.


## HORIZONTAL LEVEE

A levee with an expansive slope (e.g. 1:30) that permits habitat to migrate upland while also possibly incorporating social uses. See (1) Ocean City Horizontal Levee, and (4) Tuckerton Peninsula Barrier in Part II.

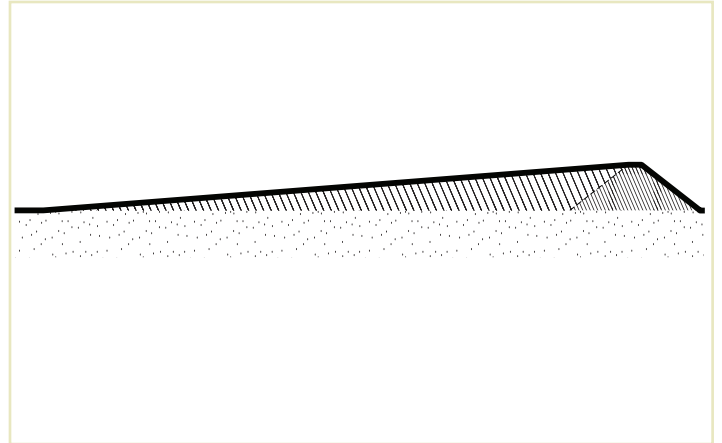


## LIVING BREAKWATERS

Living Breakwaters are emergent breakwater structures designed to incorporate various forms of desired habitat. In the NJBB, these could include oyster beds, mudflats, nesting areas for birds, and/or locations for emergent vegetation. See (2) Lagoon Community Protection, (4) Tuckerton Peninsula Barrier, and (7) Bernegat Bay Shallows in Part II.

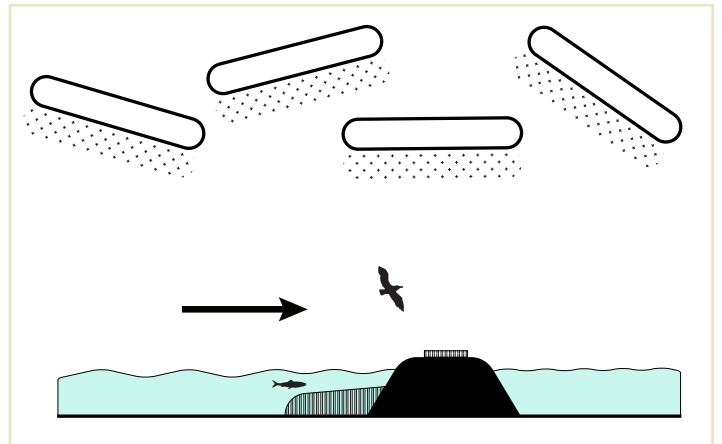

## SHALLOWS

Shallows are areas that were once deeper water, that are filled to an elevation that can accommodate sub-aquatic vegetation such as Eel Grass. See (7) Bernegat Bay Shallows in Part II.

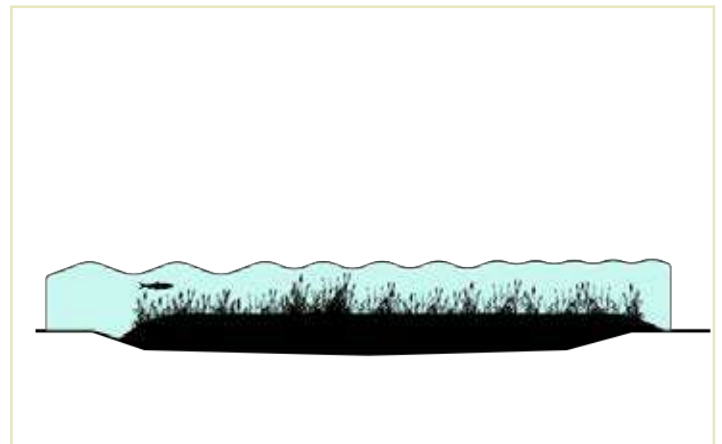


diagrams not to scale




## SPEED BUMPS

Speed bumps are linear, elevated islands, designed to reduce wave energy while providing a variety of subaqueous, intertidal, emergent, and even upland habitats. See Abesecon/Brigantine speed bumps in Central Region, Part I as well as modeling efforts.

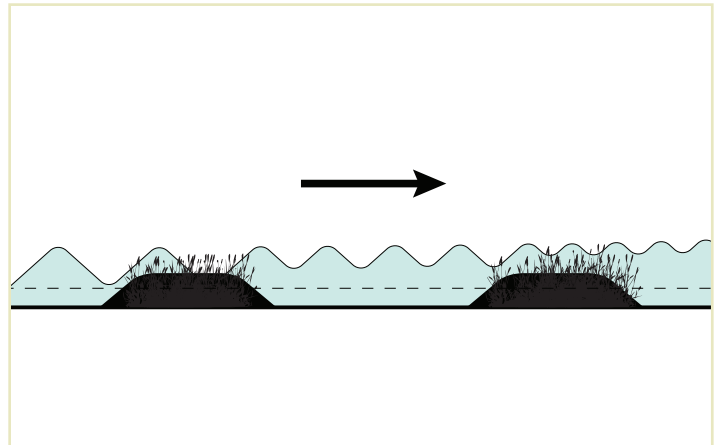


## SURGE FILTER

The surge filter is a wetland complex designed or modified in order to create a thick collection or field of vegetation and soil. This field acts like a sponge or buffer, absorbing and dissipating wave energy as water passes through it. See (5) Beach Haven Surge Filter in Part II.

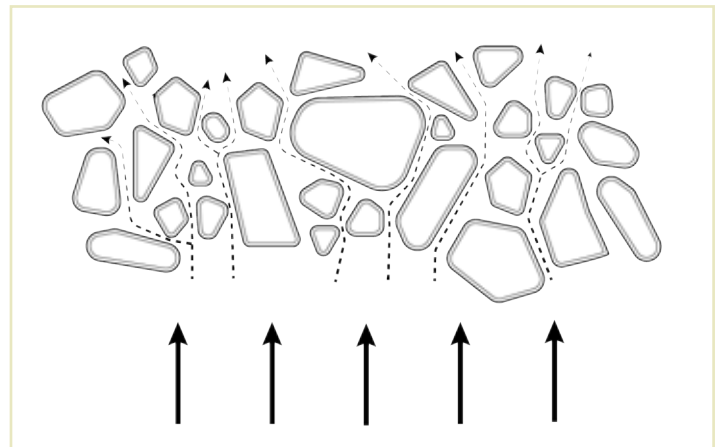

diagrams not to scale

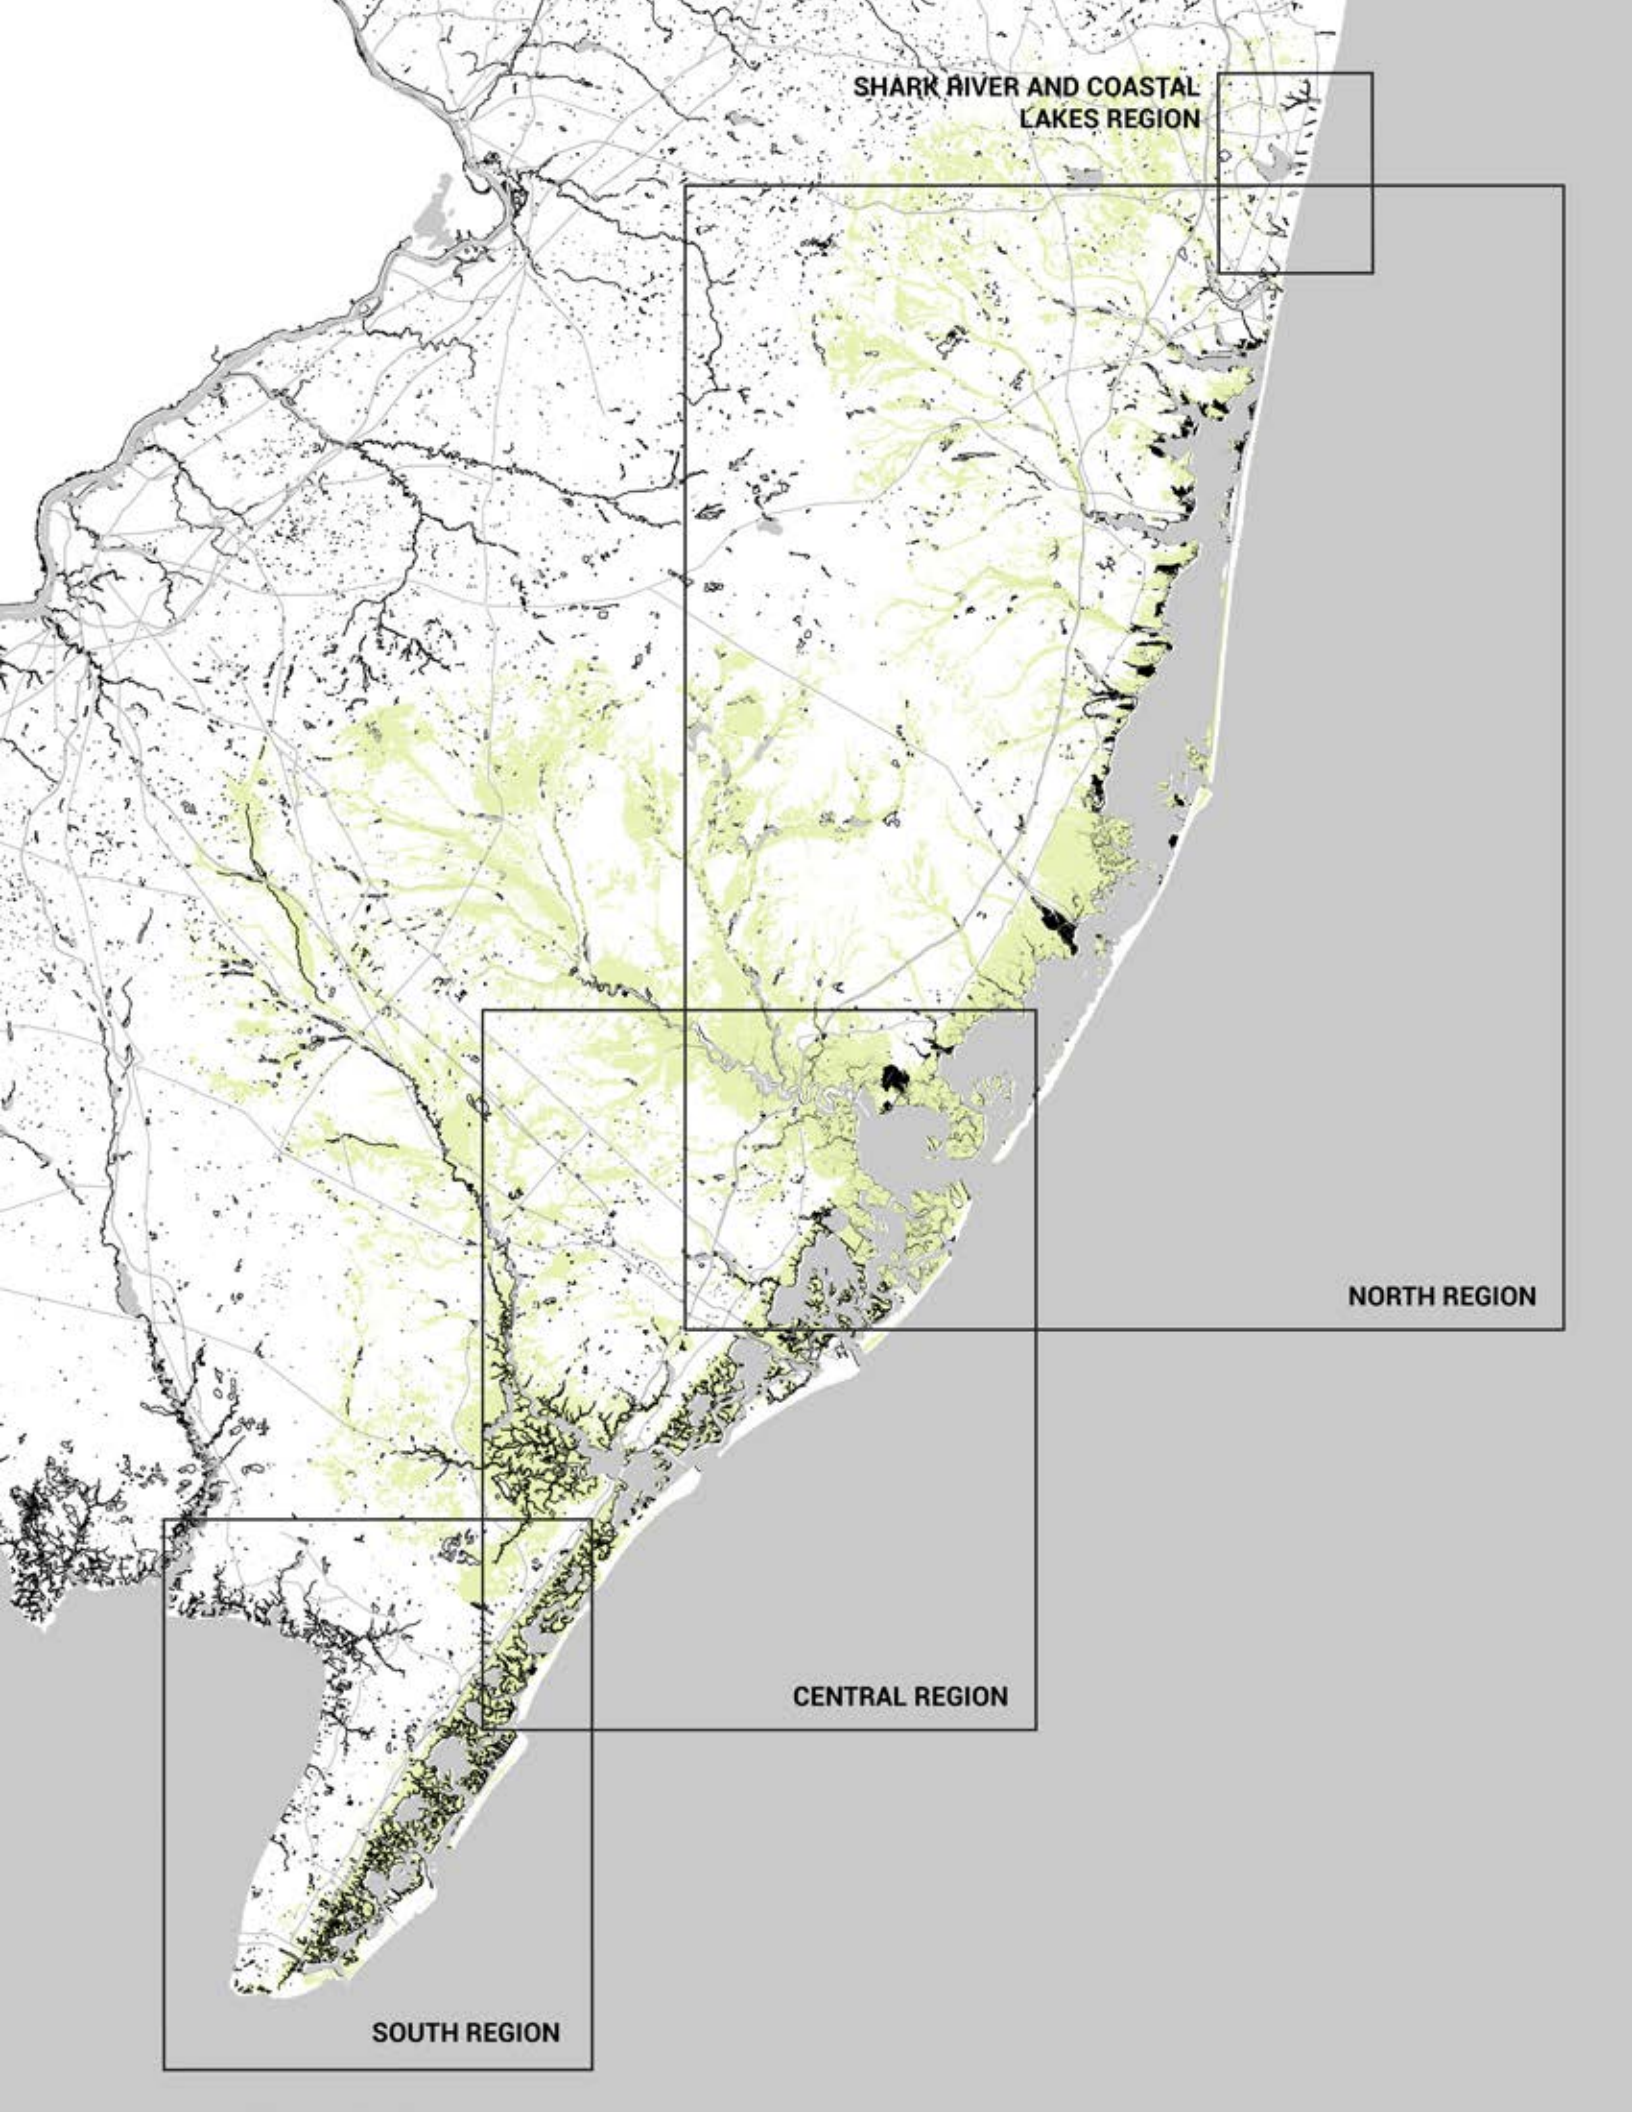

SHARK RIVER AND COASTAL  
LAKES REGION

NORTH REGION

CENTRAL REGION

SOUTH REGION

# Part I

## REGIONS AND INITIAL NATURE AND NATURE BASED FEATURES (NNBF) APPLICATIONS

This section contains an overview of the initial suite of NNBF opportunities identified by the PDT during the workshops. It is organized along the lines of the geographic study area regions from the NJBB CSRM Feasibility Study: Shark River and Coastal Lakes Region (grouped); North Region; Central Region; and South Region. The initial NNBF application concepts discussed in the workshops are listed by region, incorporating the entire range of NNBF strategies considered. The list is supplemented by maps outlining location specific concepts. The features shown on the map are drawn to locate the general area an NNBF might be considered, and are not representative of a specific design. From this full suite, key NNBF have been advanced to study as design concepts, documented in Parts II and V of this report. Other key NNBF were advanced through study by the modeling team; that work is briefly described in Part III of this report, and is documented in more depth by the modeling team's report.



## INITIAL NNBF APPLICATIONS

### Shark River/Coastal Lakes

<i>Project Idea</i>	<i>Description</i>	<i>General Vicinity</i>	<i>Comments</i>
<b>Dune Enhancement</b>	Not sure of existing dune height in this area - consider up to 20'	Belmar and Bradley Beach Area	Although not part of NJBB study per se; building up dunes on ocean-side of barrier islands represents another potential defense strategy.
<b>Expand Shark River Island</b>	Buy out residences located on Shark River Island; Create larger island with more complex topography	Shark River Island	Create more complex topography on the island w/ diverse habitat to slow surge at Shark River Inlet.
<b>Improve shoreline for lakes</b>	Create naturalized shoreline with shallower slopes or terraced shoreline to provide habitat benefits	Examples: Wesley Lake, Sunset Lake, Deer Lake, and Sylvan Lake	Lakes become part of strategy to deal with compound flooding during coastal storms (stormwater runoff+surge); Dredge out lakes to ~water table for additional storage capacity; Add pumps to draw down lake water levels prior to storms to provide flood storage (a la Harvey) Consider maintaining some at lower normal water levels to provide more opportunity for community interactions with lakes, i.e., parkland
<b>Improve tidegates/culverts for Lakes</b>	Modify tide gates/culverts to provide better circulation to lakes during calm conditions and block surge during storms	Examples: Wesley Lake, Sunset Lake, Deer Lake, and Sylvan Lake	Need to think more about EWN strategy here, if this is prioritized.

## North Region (north of Great Bay Blvd to Manasquan Inlet)

<i>Project Idea</i>	<i>Description</i>	<i>General Vicinity</i>	<i>Comments</i>
<b>Cross Bay Barrier (Great Bay Barrier Blvd) - Transformed into Horizontal Levee</b>	Modify existing area to resemble horizontal levee configuration that includes mixture of extensive high/low marsh system abutting existing infrastructure	Cross Bay Barrier/Great Bay Blvd.	Large Approach to NNBF -proposed modeling Task 7; Consider adding rails-to-trails type feature to cross-bay barrier
<b>Beach Haven/Holgate Surge Filter Islands [PROPOSED MODELING]</b>	Restore/expand marsh and island complex; Serve as "surge filter" and dampening surge.	Just North of Great Bay Blvd. In vicinity of Story Island, Goodluck Sedge, Barrel Island, West Sedge, and Goosebar Sedge	Large Approach to NNBF -proposed modeling Task 7; Restore and expand island complex to serve as surge filter; incorporate mosaic of elevations and habitats to increase surge attenuation value; likely in combination with intervention at Great Bay Blvd
<b>Bio-Block or some type of Goliath Reef Ball - NNBF Features</b>	Large, Eco-Friendly "hard-type" structure designed to withstand more energy than traditional reef balls and geotubes	On the North side of Barnegat Inlet in the general vicinity of degraded geotubes	Considerable energy in this area, which has resulted (and continues to result) in erosion.
<b>Sedge Islands Restoration</b>	Restore and build out Sedge Islands to prevent flanking of Barengat Island SSB and to minimize closure frequency.	North of Barnegat Light and south of Barnegat Bay	Restore and build out Sedge Islands to prevent flanking of Barengat Island SSB and to minimize closure frequency.
<b>Thorofare Island Expansion</b>	Significantly expand island to include upland, highmarsh, low marsh reef complex.	At Thorofare Island adjacent to large community (Mill Creek Park)	Island complex wraps around community towards Henderson Memorial Bridge
<b>Manasquan Inlet</b>	Consider reshaping of Gull Island to prevent wave propagation across shoal	Gull Island adjacent to Masasquan Inlet	Ideas in vicinity of Manasquan Inlet may also include: Parallel island to protect communities and shoreline to the north. Add dunes to beachfront, perhaps consider alternate vegetation approaches (naturally build, biomass incorporation, alternate planting
<b>Barnegat Bay Living Breakwaters</b>	Large bay of water that results in substantial fetch and wave energy. Dampen those forces through strategic integration of living breakwaters.	Placement would occur in Barnegat Bay. Modeling could help inform placement strategies	This NNBF approach could reduce sometimes subdantail fetch that is eroding north bay shorelines. The living breakwaters would also offer habitat and recreation functions.
<b>Butler's Beach Community</b>	Develop created island or island complex to include upland, high/low marsh complex w/ reef in front of community to protect from surge, wave energy, etc.	Immediately adjacent to Butler's Beach Community in Barnegat Bay Area	Island complex wraps around community like "half-moon" and/or constructed as multiple island network that offers CSRM benefits and added ecological benefits.
<b>Berkeley's Shores Community</b>	Develop created island to include upland, high/low marsh complex w/ reef in front of community to protect from surge, wave energy, etc.	Immediately adjacent to Berkeley's Shores Community in Barnegat Bay Area	Island complex wraps around community like "half-moon" and/or constructed as multiple island network that offers added protection.
<b>Sunrise Beach Community</b>	Develop created island to include upland, high/low marsh complex w/ reef in front of community to protect from surge, wave energy, etc.	Immediately adjacent to Sunrise Beach Community in Barnegate Bay Area.	Island complex wraps around community like "half-moon" with potential nexus to adjoining marsh system.
<b>Tuckerton Beach Community</b>	Develop created island to include upland, high/low marsh complex w/ reef in front of community to protect from surge, wave energy, etc.	at Tuckerton Beach	Island complex wraps around community like "half-moon" and/or a series of multiple islands that offer additional CSRM and ecological benefits.
<b>Other exposed communities immediately adjacent to bay area(s) and prone to storm surge, etc.</b>	Similar to previous communities, there is an opportunity to introduce large NNBF island features (diverse composition, scaling, etc.) that offer added CSRM benefits.	Other example areas include, but are not limited to, Long Point Island; Green Island, Windor Park; Coates Point; Berkely Shores; and Laurel Harbor	Island complex wraps around community like "half-moon" and/or a series of multiple islands that offer additional CSRM and ecological benefits.

**Central Region (from Corson's Inlet including Great Bay Blvd)**

<i>Project Idea</i>	<i>Description</i>	<i>General Vicinity</i>	<i>Comments</i>
<b>Horizontal or Ecotone Levees</b>	In addition to traditional 3:1 Levee; propose placement of material to construct 30:1 or 50:1 slope for horizontal levee; replace flood walls with levees	Ocean City, Atlantic City, and other possible locations; Where traditional levees or floodwalls must remain - pursue environmental enhancement of traditional infrastructure	Locations where traditional levee or flood wall has been proposed, but there is available space on the degraded marsh/water interface side; combine levee/flood wall with wetland to reduce overall height of ectone levee
<b>Absecon/Brigantine Island/Wetland Creation and Restoration [PROPOSED MODELING]</b>	Construction of large island(s) complex that serve as "speed bump" and dampening surge.	Includes vicinity of Brigantine, Dog Island, Weakfish Island and Shad Island	Large Approach to NNBF -proposed modeling Task 7; Work with Forsythe NWR to support existing wetlands behind Brigantine
<b>Dunes / I-Wall Complex</b>	Pile up "sand" /sediment abutting I-Wall Complex	Where I-Flood Walls are still required because of limited space.	Possible to reduce overall height of flood wall with added sand
<b>Dune Enhancement</b>	Current dunes are between 12-14' in height (ie. Absecon Island) - consider up to 20'	On barrier islands; Brigantine area	Although not part of NJBB study per se; building up dunes on ocean-side of barrier islands represents another potential defense strategy.
<b>Great Egg Harbor Inlet Island [PROPOSED MODELING]</b>	Restore/expand marsh islands in vicinity of Great Egg Harbor Inlet to replace or reduce operation of proposed SSB	Vicinity of Great Egg Harbor	Large Approach to NNBF structure - proposed modeling Task 7; Restore/expand marsh islands in vicinity of Great Egg Harbor Inlet to replace or reduce operation of proposed SSB
<b>Mystic Island and Osborne Island Communities</b>	Develop created islands to include upland, high/low marsh complex w/ reef in front of community to protect from storm surge and dampen wave energy, etc.	Mystic Island and Osborne Island Communities	Island/Marsh complex wraps around Mystic Island in "half-moon" shape with nexus to adjoining marsh. Osborne Island already somewhat protected, but additional island features from Mystic and Tuckerton Beach Community provide additional protection.



## South Region (Cape May to Corson's Inlet)

<i>Project Idea</i>	<i>Description</i>	<i>General Vicinity</i>	<i>Comments</i>
<b>Horizontal or Ecotone Levees</b>	In addition to traditional 3:1 Levee; propose placement of material to construct 30:1 or 50:1 slope for horizontal levee; replace flood walls with levees	North Wildwood, Wildwood Crest, Wildwood, Stone Harbor & Seven Mile Island area (other possible locations); Where traditional levees or floodwalls must remain - pursue environmental enhancement of traditional infrastructure	locations where traditional levee or flood wall has been proposed, but there is available space on the degraded marsh/water interface side; combine levee/flood wall with wetland to reduce overall height of ecotone levee
<b>Speed Bump Islands</b>	Speed bump islands to knock down hydrograph—more of a surge filter and barrier		Construct islands using maintenance dredge material or dredging NJIWW back to original project depth
<b>Dunes / I-Wall Complex</b>	Pile up "sand" /sediment abutting I-Wall Complex	Where I-Flood Walls are still required because of limited space.	Possible to reduce overall height of flood wall with added sand
<b>Strategic Placement of sediment on/adjacent to existing wetlands</b>	Support existing wetland complexes given their existing function		existing wetlands because they are already providing some measure of risk management, can use navigational DM to do this in some areas

## SHARK RIVER AND COASTAL LAKES REGION

The Shark River and Coastal Lakes region combines two of the study area regions from the NJBB CSRM Feasibility Study into one area. This area stretches from Lake Takanassee in Monmouth County south across the Shark River to Wreck Pond in Ocean County. It contains 16 freshwater and brackish lakes, many of which are non-tidal yet nonetheless connected to the Atlantic Ocean in some way. Historically, many of these lakes were estuaries, but today they exhibit a range of conditions that subject them to different types of flood risk. Much of this region is highly urbanized and the water quality of the lakes is compromised by stormwater runoff. This region is unique to the study as it does not have any back bay wetlands protected by sand bars, as is the condition in most of the study area south of the Coastal Lakes Region.

### NNBF Opportunities

Due to the highly variable conditions of the various lakes, very few generalizable NNBF responses are possible within this region. The reduction of flood risk is something that must be considered on a lake-by-lake basis. However, the opportunity of terracing or lining lakes with vegetation that could serve as stormwater filters, habitat, and increased recreational amenities is one overall strategy that may be applicable (see (2) in Part II). Other possibilities include the creation of islands within the river itself in order to reduce storm effects to the surrounding coastlines.

### Legend

- Tidegate Improvements
- Shoreline Enhancement
- Island Expansion
- Dune Enhancements







## NORTH REGION

The north region of the study area extends from the Manasquan Inlet south to Little Egg Harbor Inlet and the Great Bay estuary. It is the largest region of the analysis and includes areas in Ocean, Burlington and Atlantic Counties. This region is characterized by large bays with very few openings or inlets to the Atlantic and includes Barnegat Bay, Manahawkin Bay, Little Egg Harbor, and Great Bay. The typical conditions here include barrier beaches or spits that separate the Atlantic from the bays behind them. Most of the spits are highly developed on both the ocean and bay sides. The western coast of the bays are more diverse with urban development, single family homes, wetlands, and a collection of lagoon communities.






There are several structural CSRM alternatives being considered for this region within the feasibility study, including gated storm surge barriers (SSB) at Barnegat Inlet and Manasquan Inlet and bay closures at the Point Pleasant Canal and Holgate. As of this writing, the viability of each of these and/or their combination is still under review. However, the proposed Holgate bay closure would significantly impact the potential of particular EWN strategies within this region. Additionally, because options that included this strategy (3F in the NJBB CSRM IFS) failed the environmental quality (EQ) screening in the feasibility study, the work included in this report assumes that a bay closure in this area is infeasible due to ecological concerns. The feasibility study also indicates that the proposed SSB that would be constructed between Little Egg Inlet and Brigantine Inlet at the southern end of this study area is likely not feasible due to the combination of financial and environmental costs. Storm surge barriers at Barnegat and Manasquan would have varied effects on the EWN potential of the strategies included in this report, but it is believed that, with the exception of the Holgate bay closure, none of these are completely incommensurable.


### NNBF Opportunities


As the largest region of the study, and a collection of somewhat similar conditions, this region provides the opportunity to study a series of strategies that could be

repeatedly deployed at large scale, calibrated to specific conditions. For this report, we have used Barnegat Bay as our example for this approach, demonstrating the range of NNBF strategies that could be used at a bay-wide scale to address some of the more ubiquitous conditions there. If the Holgate barrier option and the Little Egg-Brigantine Storm Surge Barrier are not included in the TSP, then this will place significant importance on the performance of the Tuckerton Peninsula/Great Bay Boulevard wetland complex and the system of sedge islands to the northeast of the peninsula. This report covers two possible NNBF in this area, including possibilities for the Tuckerton Peninsula (see page 54) and the modifications of the sedge islands to enhance their performance as a surge filter (see page 70).

### Legend

-  Horizontal or Ecotone Levee
-  Island Expansion
-  Dune Enhancements
-  Bio-block or Goliath Reef Bal
-  Island Creation



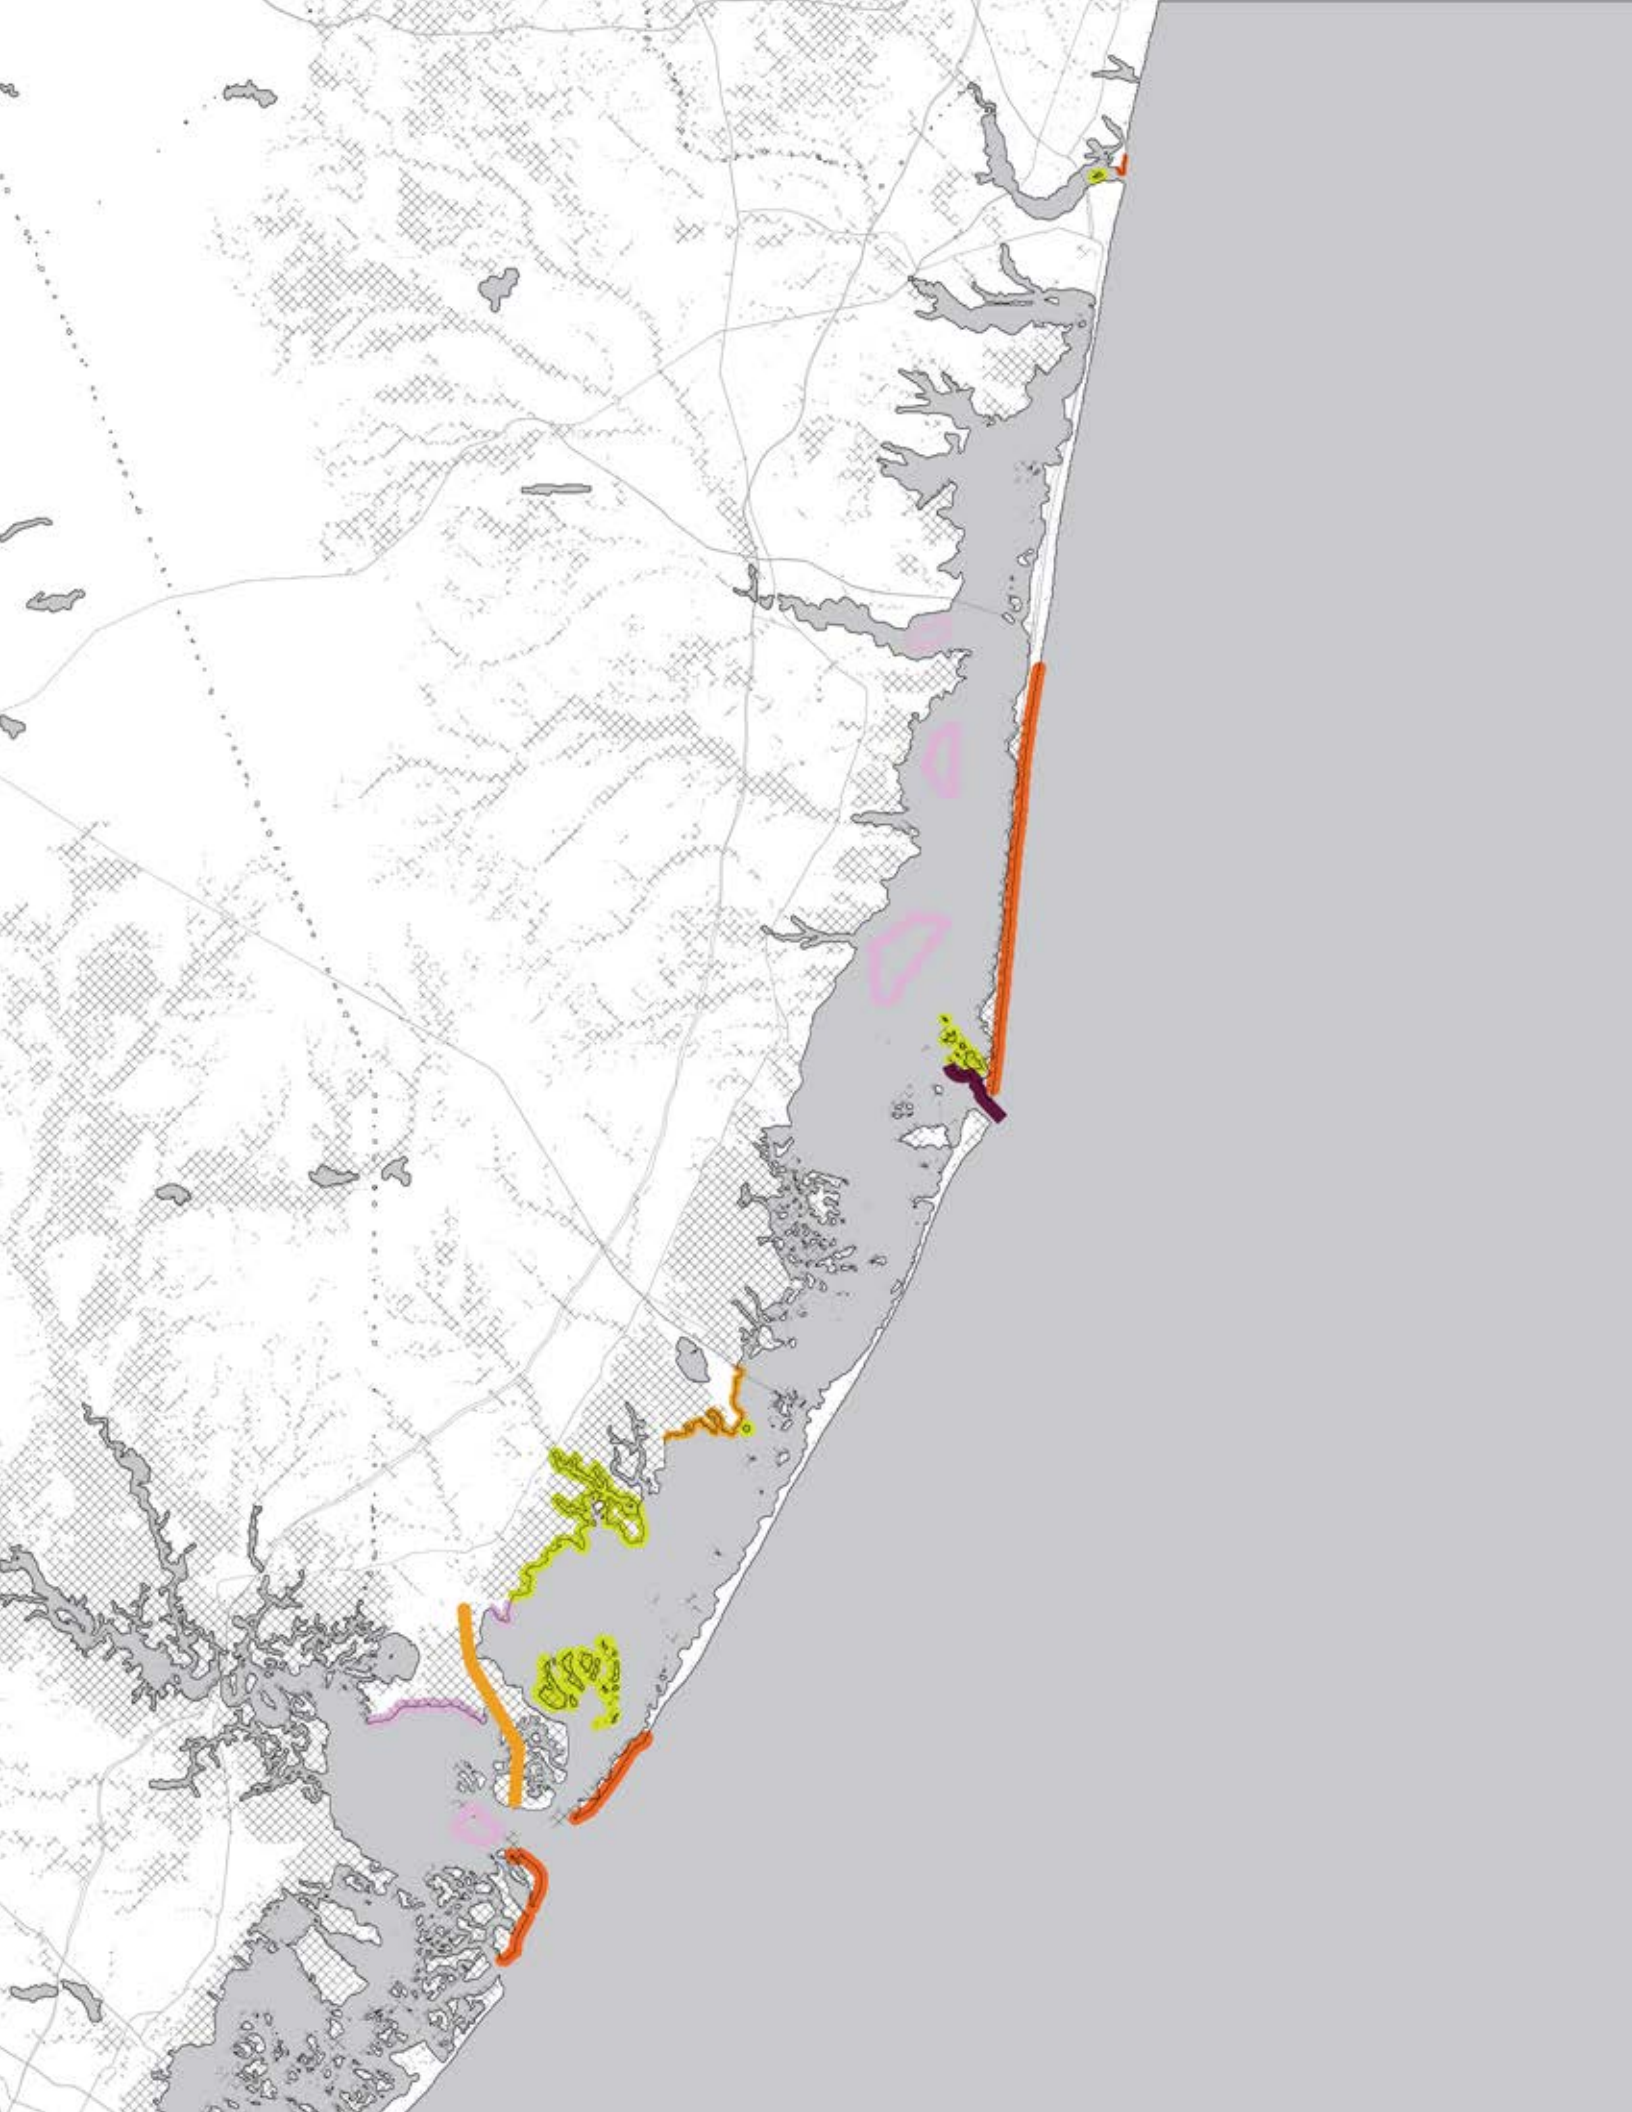

## CENTRAL REGION







The Central Region extends from Little Egg Harbor and extends south to the Corson Inlet. This area contains many more inlets than does the North Region and has large urban populations on the barrier islands in Atlantic City, Brigantine, and Ocean City. Like the North Region, the western coast of the bay is a mixture of single family residential, wetlands, and small urban developments, including lagoon communities.


Structural CSRM strategies under consideration in the IFS for the Central region include SSB at the Absecon and Great Egg Harbor inlets and bay closures at either North Point or Absecon Boulevard. The viability of these strategies is still under consideration, but if bay closures are deemed necessary, the Absecon closure has been described as preferable from both an economic and ecological perspective, because it maintains the highest level of connectivity between the ocean and the bays.

### NNBF Opportunities


One of the significant challenges of this region is the flooding of urban areas from the bay during periods of high water. In addition to the aforementioned SSB and bay closures, there is likely to be some consideration of flood wall or levee construction to protect urban populations on the barrier islands. This report discusses one such condition in Ocean City, looking at how it can be developed as a NNBF (see page 40). Many of the previously discussed possibilities for wetland creation and bayfloor shallowing may have application in this region as well, particularly in and around Reed's Bay in the event of the bay closure moving to Absecon. The CSRM effects of such wetland enhancements are currently under consideration by the modeling team.

### Legend

-  Horizontal or Ecotone Levee
-  Island Expansion
-  Dune Enhancements
-  Island Creation
-  Wetland Creation or Restoration
-  Wetlands





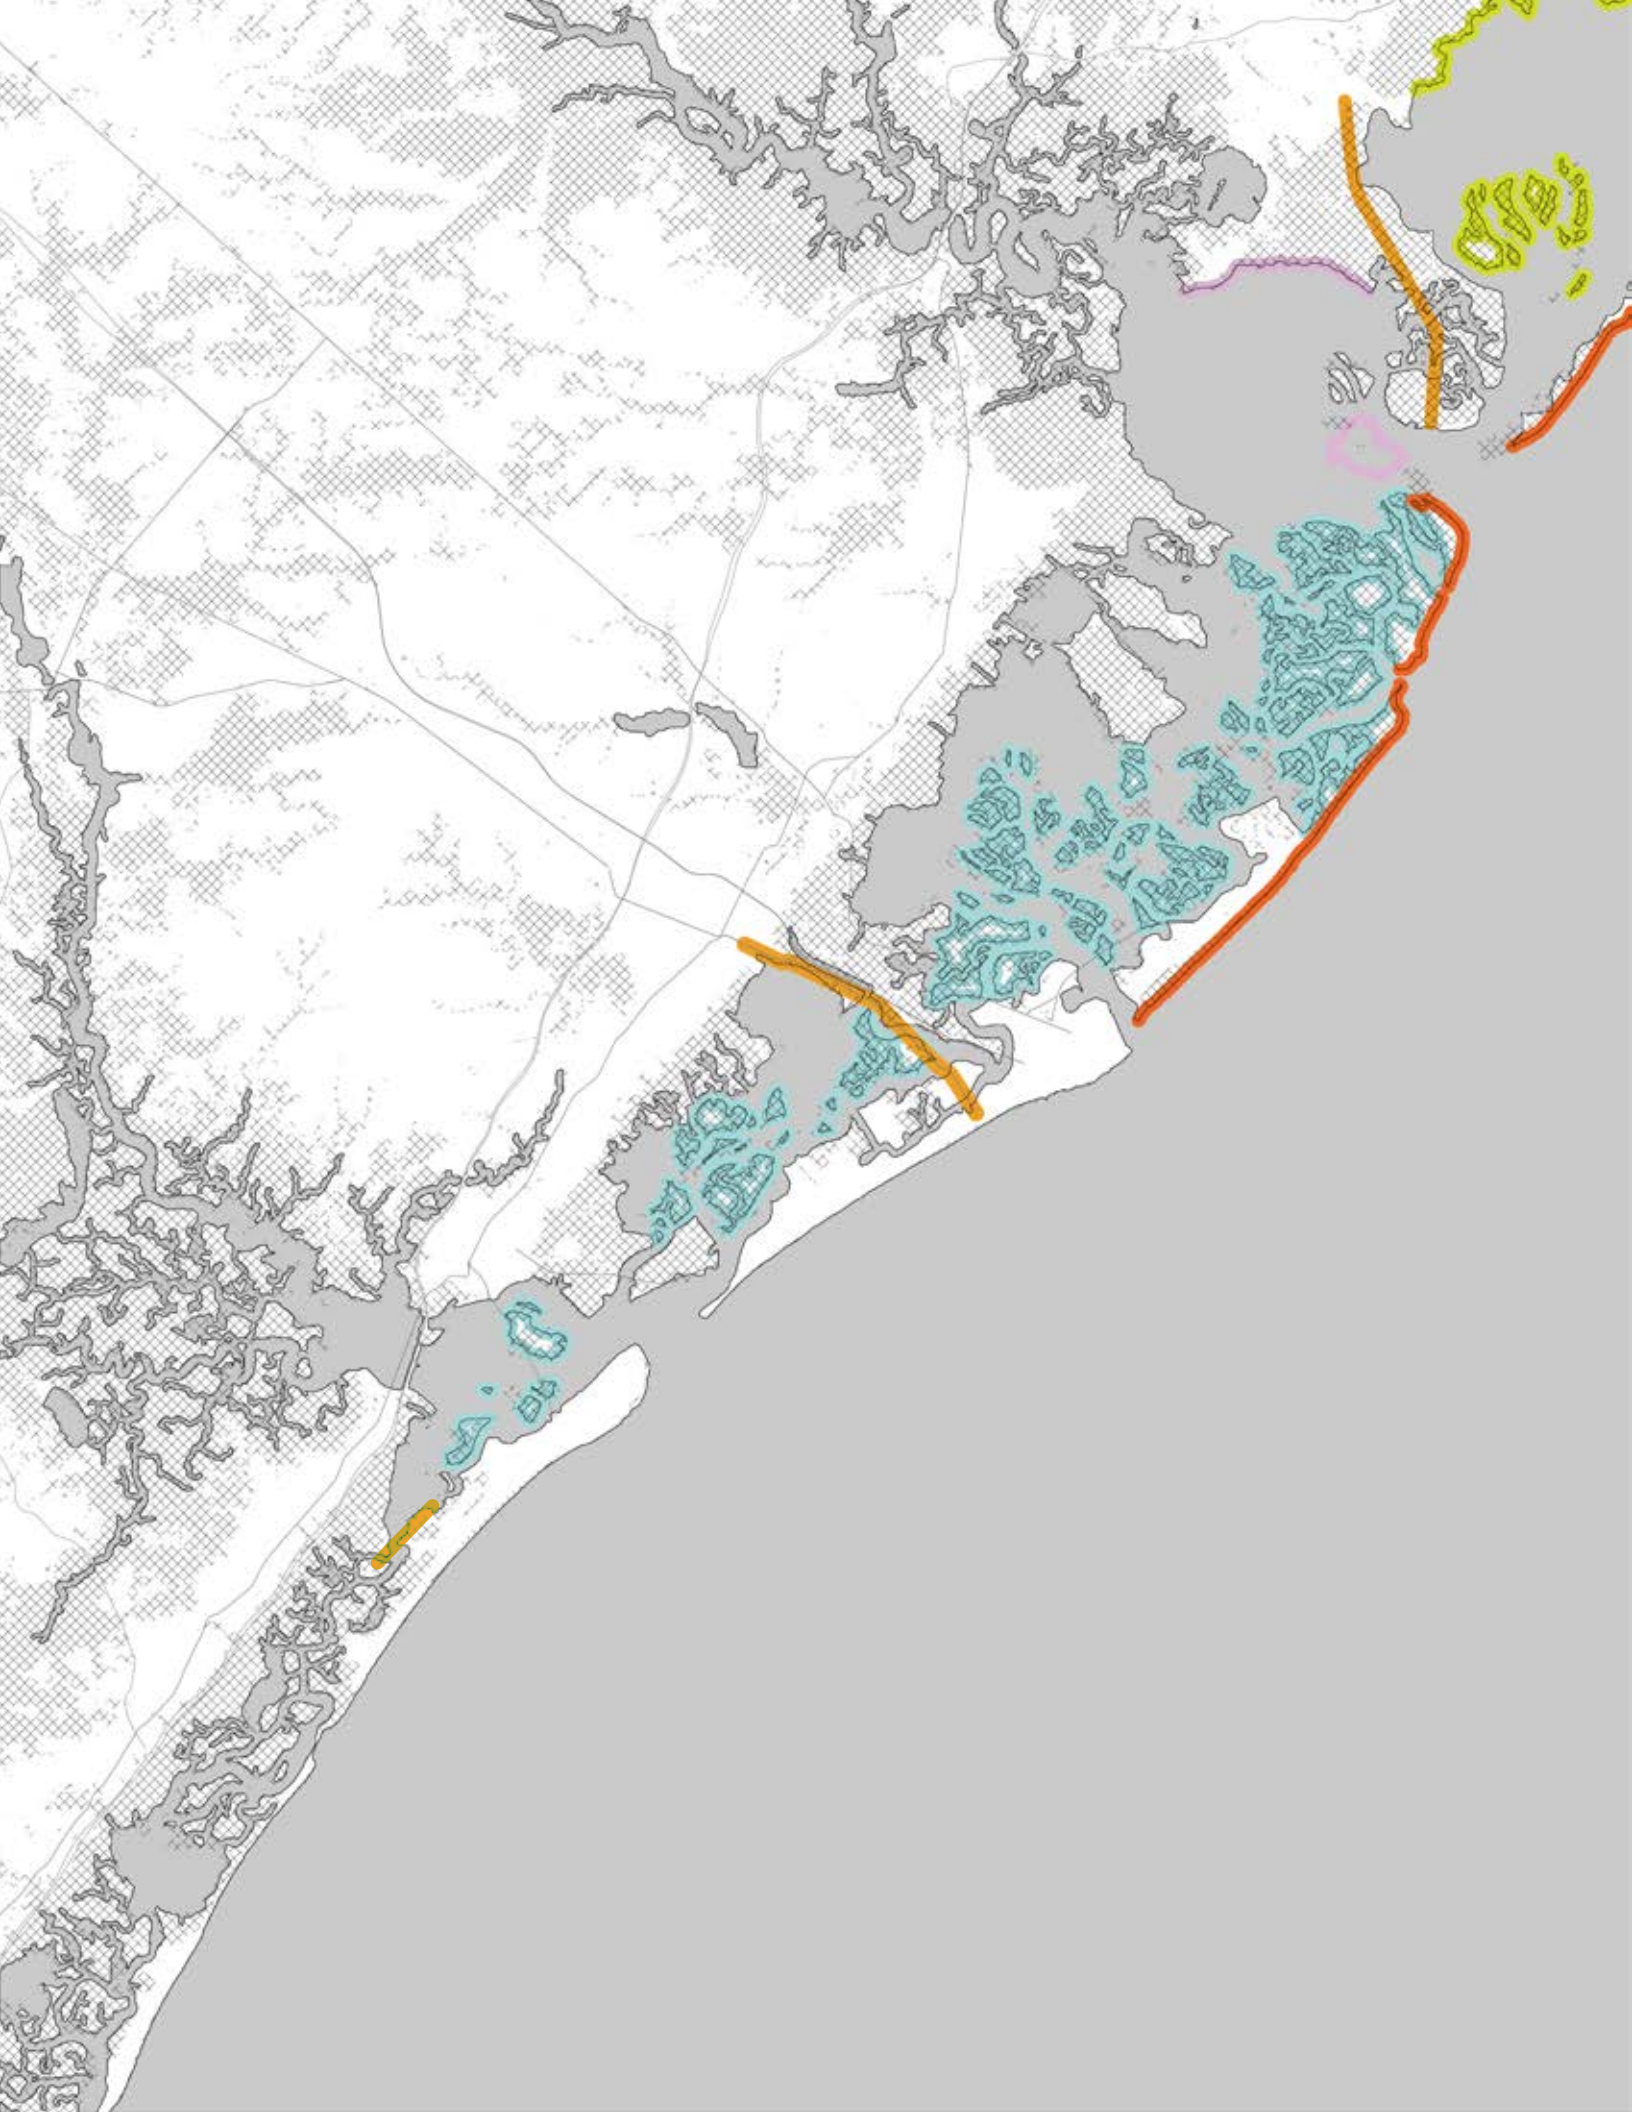

## SOUTH REGION

The South Region extends from Corson Inlet south around Cape May. This region is characterized by a large number of inlets and developed urban regions on the barrier islands. Many significant urban areas exist in the region, including Avalon, Stone Harbor, Wildwood and Cape May. However, the western edges of the bay are notably less developed than in other regions.

According to the Interim Feasibility Study, the only alternatives that are feasible in the southern region are nonstructural options, with or without a perimeter plan to protect the western side of the barrier communities.


### NNBF Opportunities

Due to the suggested infeasibility of structural CSR measures, the South Region will likely require significant investments in both nonstructural strategies and strategies that enhance wetlands in order to provide enhanced storm protection. While the decision was made for this study to focus NNBF development in the Central and North regions, the perimeter plan that will likely be necessary for this region could benefit from NNBF similar to those described for Ocean City (see page 40) or the wetland enhancement projects described elsewhere in this report. Dune enhancement and beach nourishment is also possible in this region as a method of protecting barrier island communities.


Finally, the Seven Mile Island Innovation Lab (see page 74) is a collaborative project between the USACE, the Wetlands Institute, and the State of New Jersey, began in 2019. It is developing innovative methods of sediment management that have significant potential to contribute to CSR.


### Legend

-  Seven Mile Island Innovation Lab
-  Island Expansion
-  Dune Enhancement
-  Wetlands





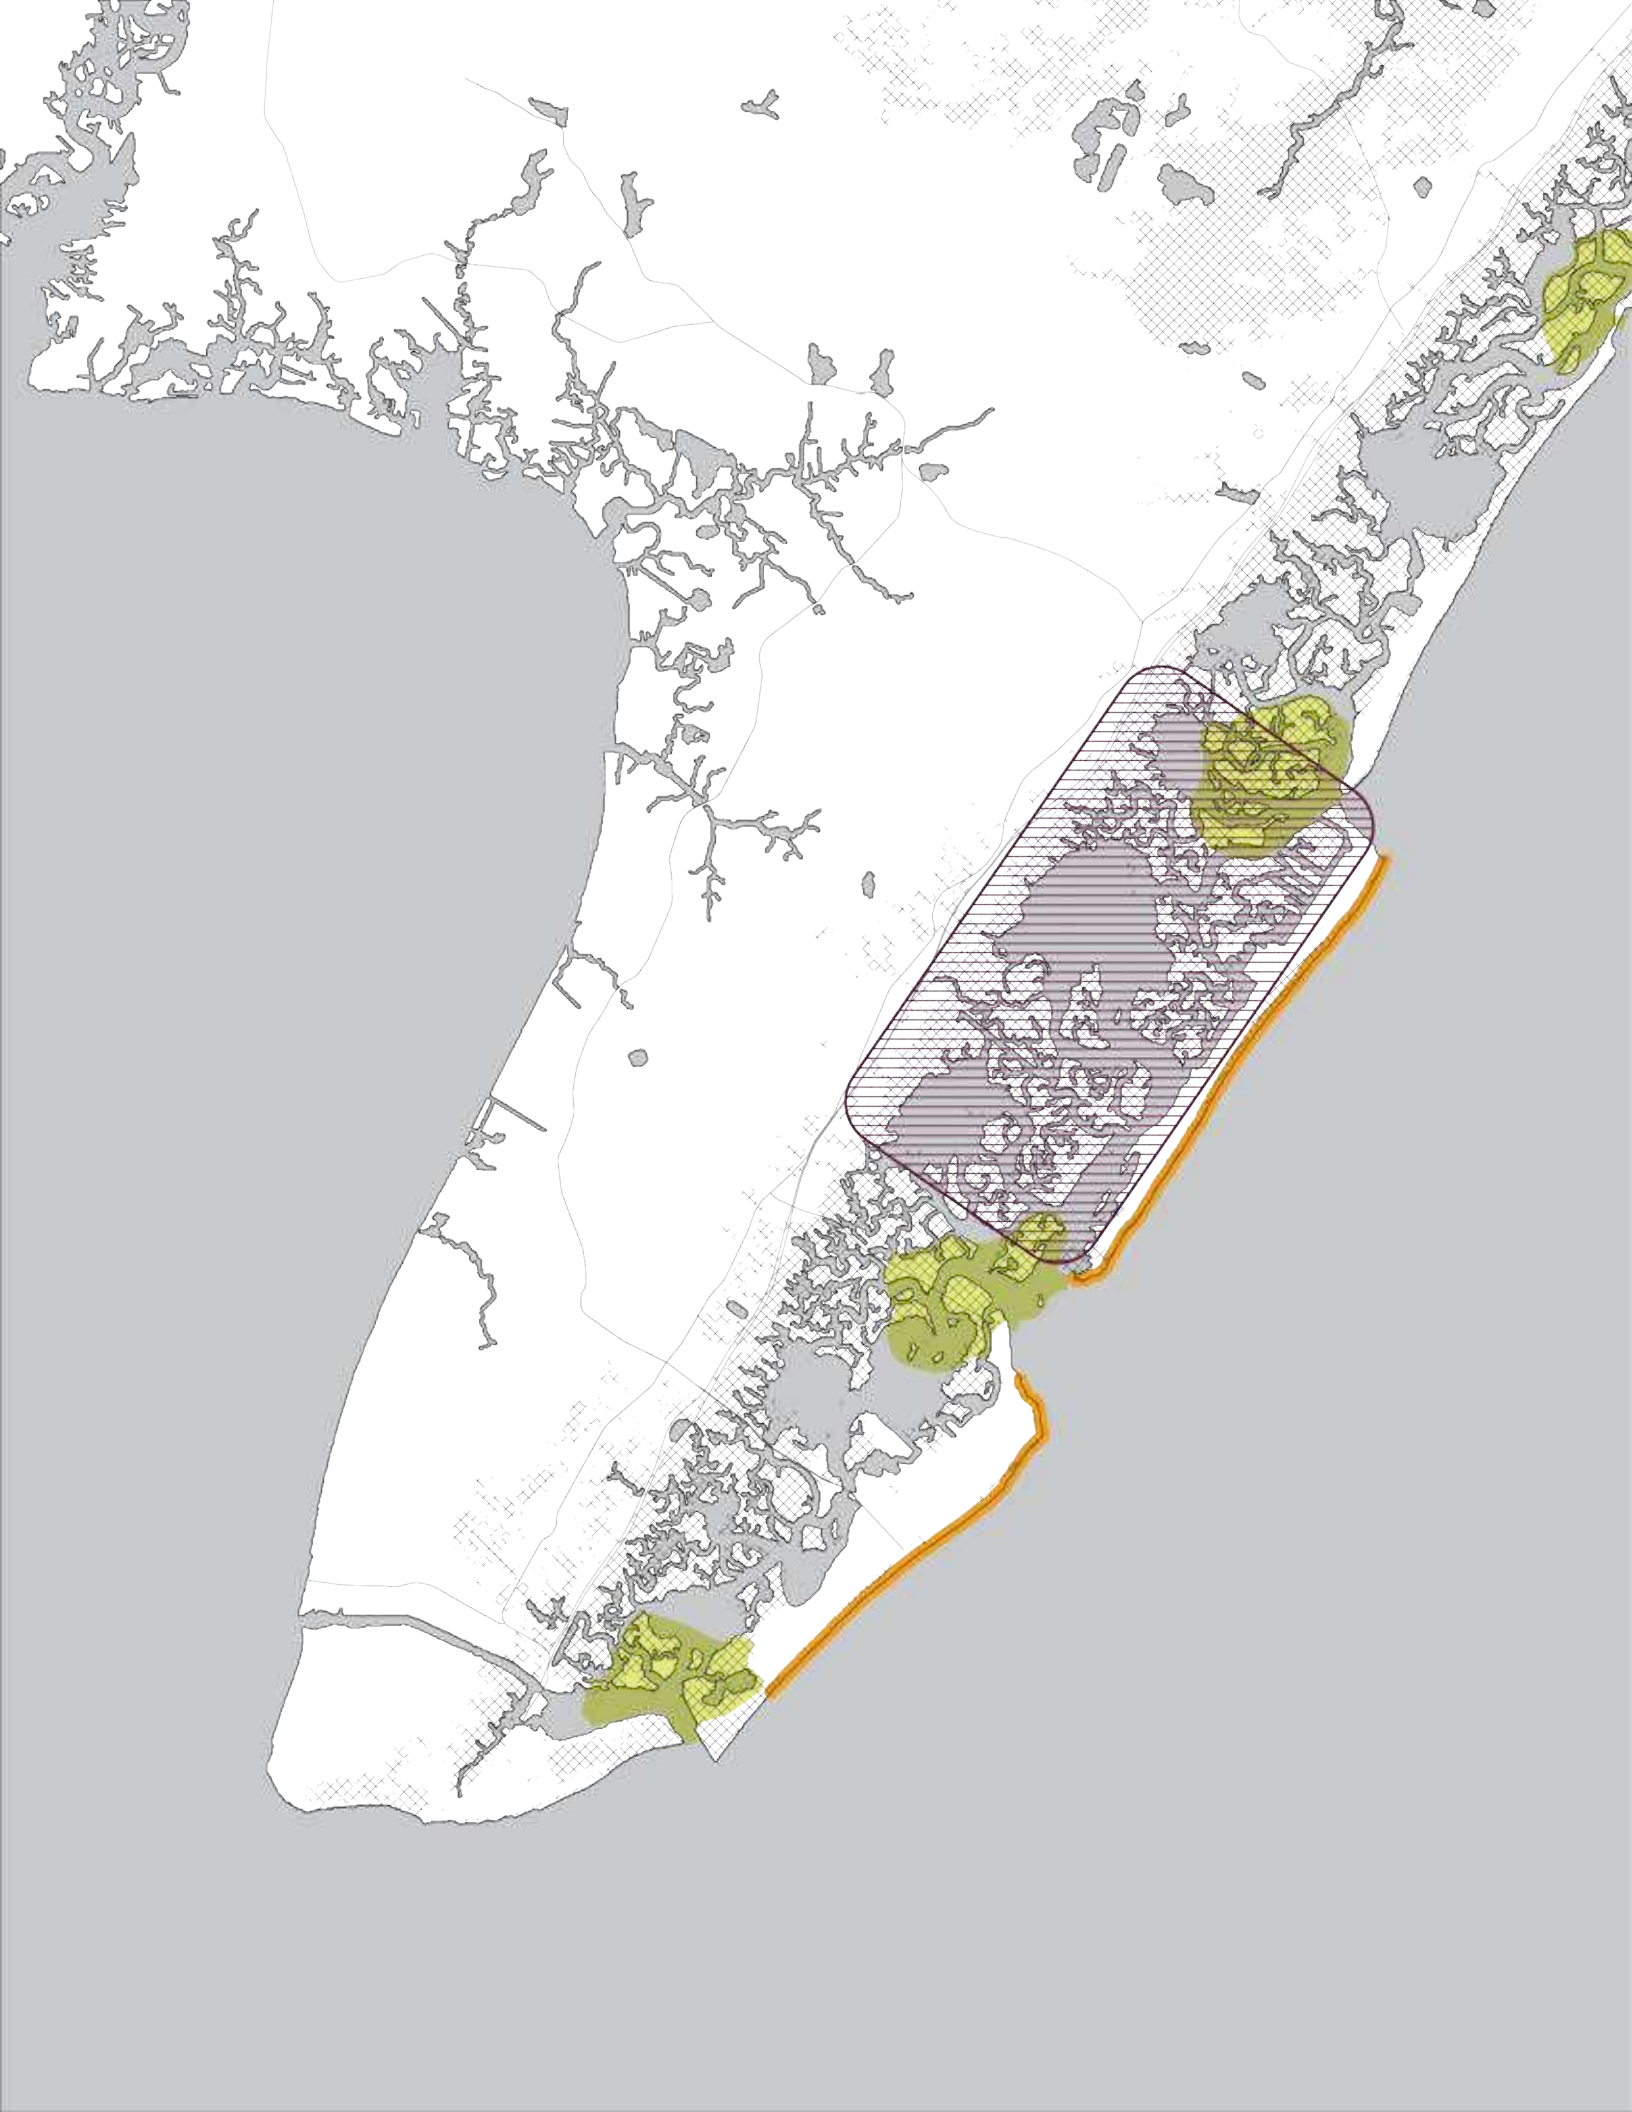

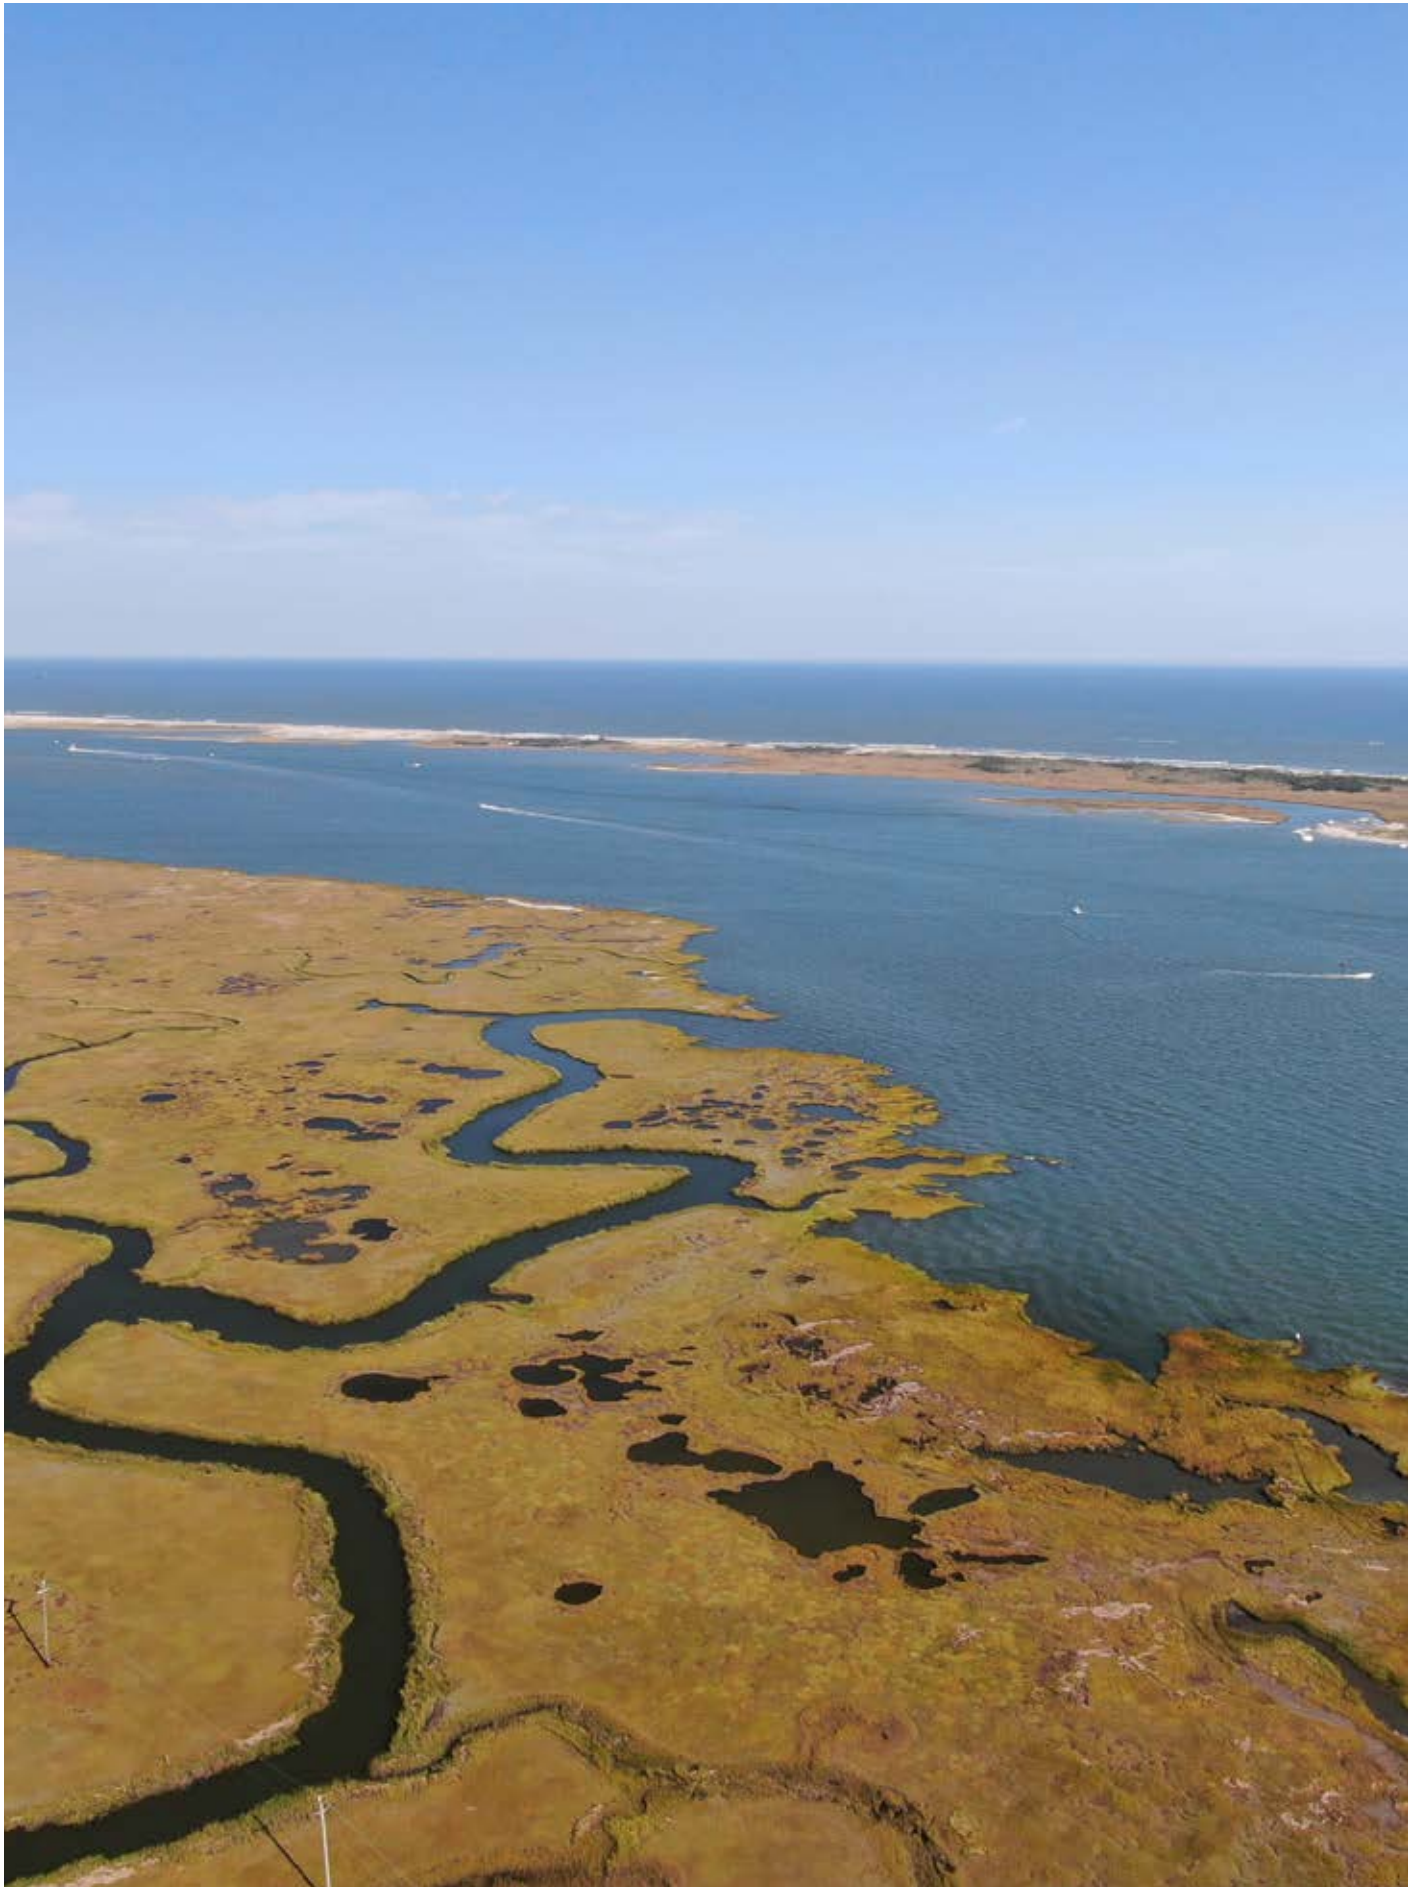



# Part II

## DESIGN CONCEPTS

Drawing on the broad range of NNBF opportunities identified during the workshops (as described in Part I), the PDT has collaboratively selected a subset of NNBF for further advancement as design concepts. These NNBF have been selected first for their potential to combine CSRM value with ecological and social benefits.

They have also been selected to demonstrate the range of scales that NNBF can be deployed at within the larger study area. These scales range from a comprehensive regional scale (XXL) to the scale of discrete landscape interventions (M-S). A given type of NNBF, such as a “surge filter”, can be deployed at any of these sizes: a single or small grouping of marsh islands might constitute a “S” or “M” surge filter; a dense archipelago of marsh islands at one particular inlet could be an “XL” deployment of surge filters; and the strategic placement of marsh islands throughout the breadth of a bay could be an “XXL” use.

It is also important to note that these design concepts are potentially applicable in multiple geographic circumstances. The Ocean City horizontal levee/wall, for instance, has been developed to suit the particular circumstances of one stretch of proposed seawall in Ocean City, but the general concept that it represents could likely be deployed in other locations where bayside perimeter protection is required. Similarly, the Beach Haven Surge Filter is representative of several potential surge filter locations that have been identified in Part I. Finally, the concepts described under the rubric of the XXL approach to Barnegat Bay, are presented as a toolkit of NNBF that could be deployed in a variety of circumstances. Mappings of both the Great Bay/Little Egg Inlet Region and of Barnegat Bay delineate opportunities for such deployments as well as conditions like marsh loss that should inform their placement.

The advancement of these NNBF has been shaped by collaborative discussions that have included both the EWN-LA project team and personnel from NAP. For several of the features in this section (as well as additional features not described in this section), their CSRM value was also evaluated by the modeling team. That evaluation is described in Part III of this report, and in more detail in the modeling team’s report.

The design concepts in this report are arranged by scale, from small to large. The adjacent map shows the overlap between the selected areas for modeling and the design concepts that follow. See Part III for more detail on modeling areas.

*Scale S-M*

- 1 Ocean City Horizontal Levee/Wall
- 2 Lagoon Communities Protection
- 3 Coastal Lakes Terracing

*Scale L*


- / Great Bay and Little Egg Inlet Region [Mappings]
- 4 Tuckerton Peninsula Barrier
- / Great Bay Blvd Horizontal Levee [Model Area]

*Scale XL*

- 5 Beach Haven Surge Filter
- / Beach Haven/Holgate Surge Filter [Model Area]
- 6 Seven Mile Island Innovation Lab
- / Absecon/Brigantine Island Restoration [Model Area]
- / Great Egg Harbor Inlet [Model Area]

*Scale XXL*

- 7 Barnegat Bay Shallows
- / Barnegat Bay Region [Mappings]
- / 3 XXL Opportunities

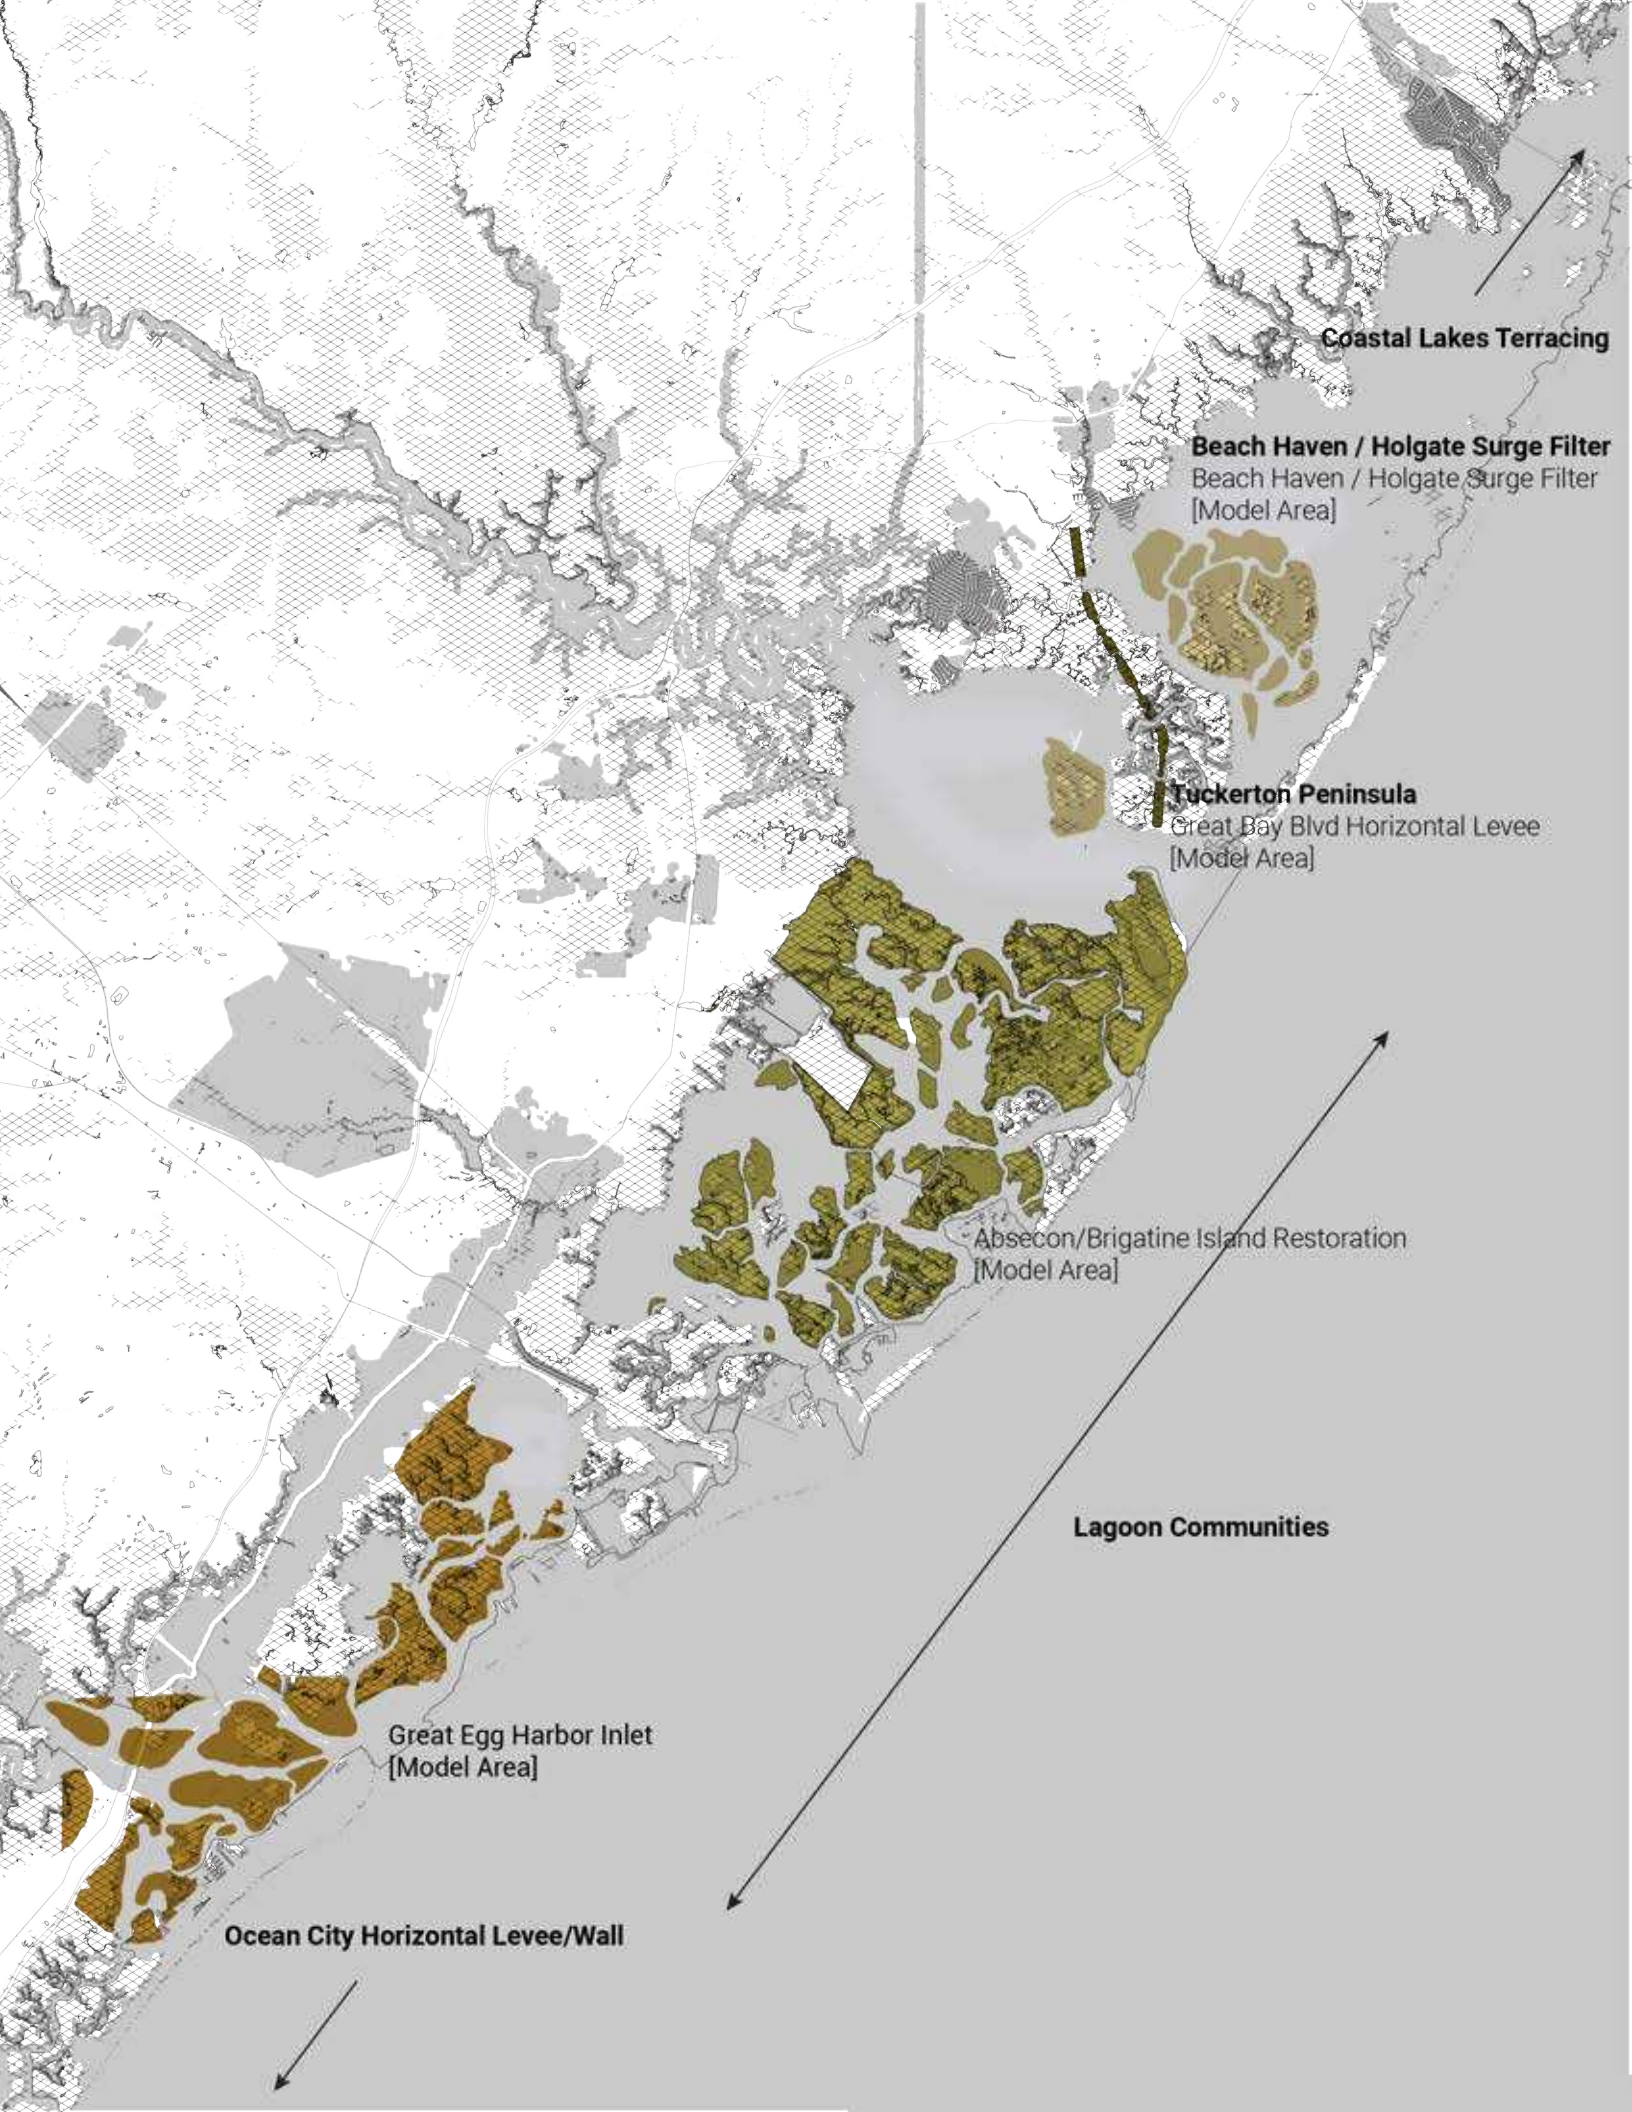

**Coastal Lakes Terracing**

**Beach Haven / Holgate Surge Filter**  
Beach Haven / Holgate Surge Filter  
[Model Area]

**Tuckerton Peninsula**  
Great Bay Blvd Horizontal Levee  
[Model Area]

Absecon/Brigantine Island Restoration  
[Model Area]

**Lagoon Communities**

Great Egg Harbor Inlet  
[Model Area]

**Ocean City Horizontal Levee/Wall**



# 1 OCEAN CITY HORIZONTAL LEVEE/ WALL

The feasibility study includes a large number of perimeter plan locations that would protect bayside communities from storm surge and rising waters. The features most typical in these protections are the levee and the seawall. In areas with dense populations, seawalls are less disruptive and take up less space. According to the feasibility study, the costs between the two strategies are comparable.



Levees could be modified in order to achieve NNBF objectives. The creation of a more horizontal levee with less steep (1:20-1:30) sides would allow for areas of elevated vegetation and possible social amenity that are not possible on the standard 1:2 slope levee. In the Central Region, where urban populations are dense, the ability to achieve both the space-saving qualities of the sea-wall and the ecological and social benefits of the horizontal levee could be desirable. Looking specifically at the community of Ocean City facing into the back bay wetlands, the hybrid “levee/wall” design concept described here would modify

the seawall that is under consideration between the Ocean City Dog Park and the Harry D. Vanderslice Baseball Complex.


The design concept for this Ocean City levee/wall is intended to provide connectivity between two public resources in the city (the dog park and the ball fields) while also providing open space for residents and enhanced elevated habitat. Instead of the proposed zig-zagging of the seawall around properties, this design concept straightens, and thus shortens, the length of the wall in this area, filling in the spaces between homes with either elevated habitat or accessible routes to the top of the levee/wall and a trail there. Slopes of the levee/wall vary along its length between 1:20 and 1:30 in order to accommodate the creation of more open space at the crest of the levee/wall.





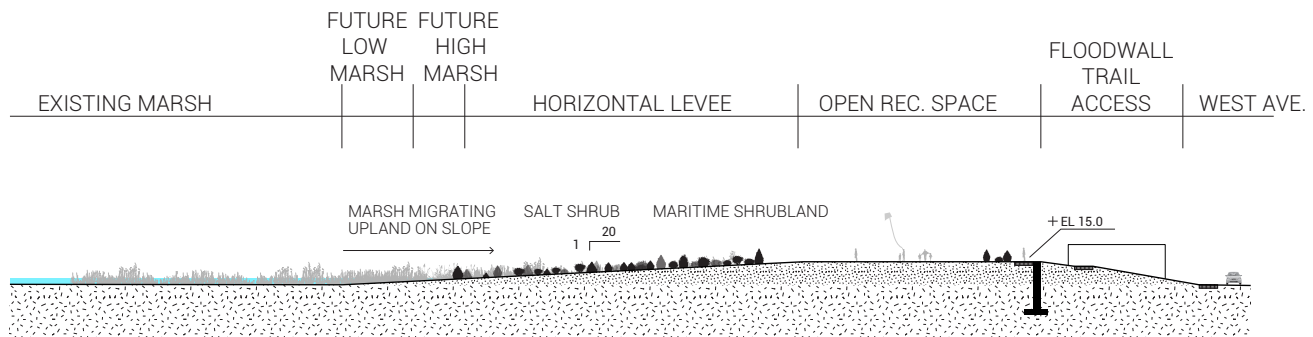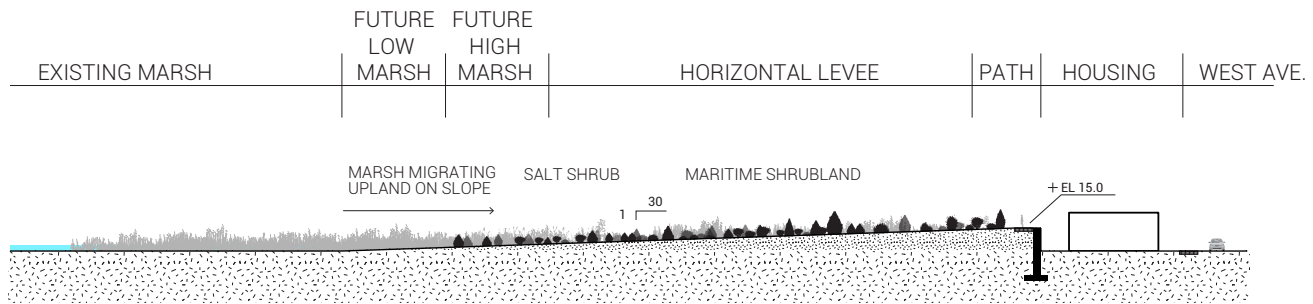

0 25 50 100 ft  
**Ocean City Section**

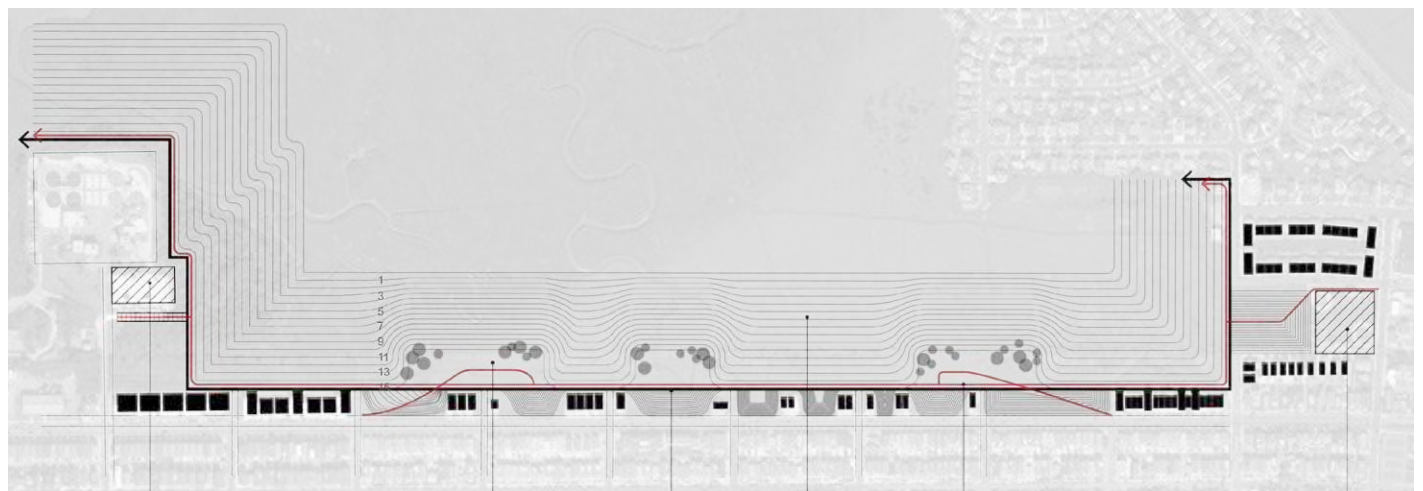


**Ocean City Dog Park** **Open Space** **Sea Wall** **Horizontal Levee** **Path** **Baseball Complex**

0 125 250 500 ft  
**Ocean City Plan**



## 2 LAGOON COMMUNITY PROTECTIVE ISLANDS

One of the more characteristic conditions of interest within the north region is the collection of lagoon communities that exist along the western shore of the bay. Building traditional structural measures is infeasible in these circumstances, as the viability of these communities depends on their extensive shoreline and water access, but linear islands could be constructed in the bay to provide wave energy reduction, habitat, and recreational opportunities for them. As shown in the plan and section, 'habitat breakwaters' constructed of stone could form the core of these islands, with constructed oyster reefs on the eastern (bay) sides of the islands, and underwater slopes planted with SAV on the protected western sides. (These drawings are of a hypothetical location that has been collaged together from multiple actual locations, and should not be taken to represent a specific community.)

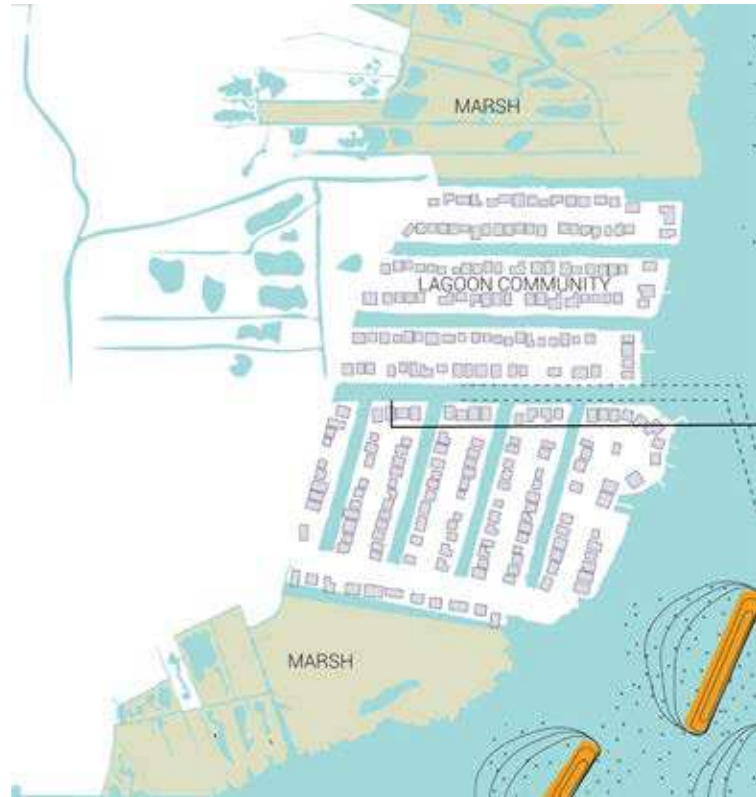

LAGOON COMMUNITY



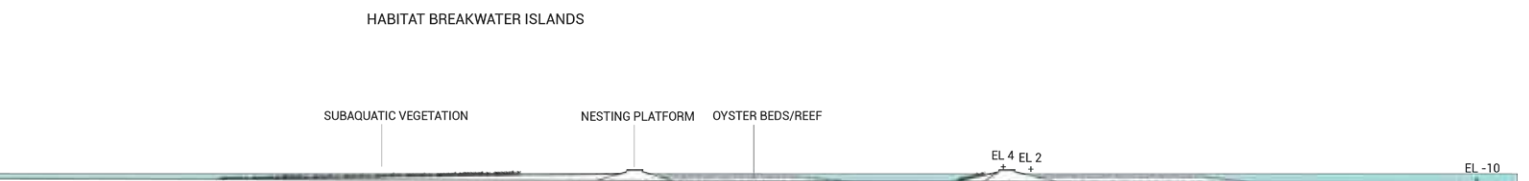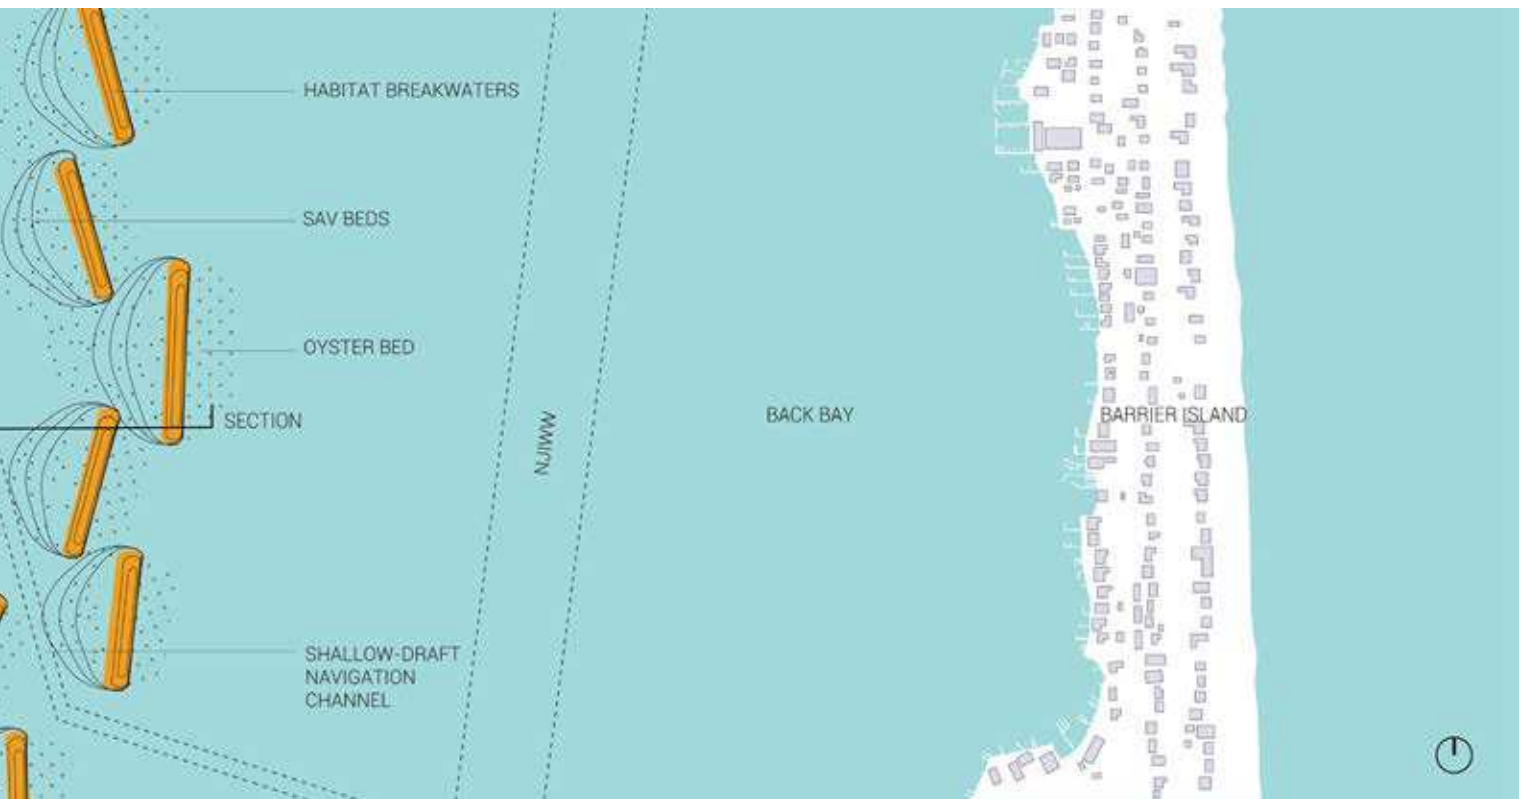

### 3 COASTAL LAKES TERRACING

The wide range of conditions that exist within each of the coastal lakes of the study's northernmost region means that specific NNBF designs would need to be calibrated for each of the lake's particular features and flooding concerns. However, some generalized strategies are possible. Terrace construction around the lakes could be a method for creating habitat and filtering stormwater that continually compromises water quality. The CSRM value of this strategy would vary based on individual lake conditions, but, in many cases, the lakes serve as important flood storage areas during storms. Methods to increase flood capacity could include excavation of the lakes themselves, but would require specific knowledge of the Lake's hydrology and relationship to tidal versus overland flow. Using the Lakes as effective flood control might require updates to or the installation of tidal gates.

#### DEAL LAKE

Perimeter: 11.48m  
Area: 0.26m<sup>2</sup>



#### SUNSET LAKE

Perimeter: 1.04m  
Area: 0.02m<sup>2</sup>



#### LAKE WESLEY

Perimeter: 1.32m  
Area: 0.02m<sup>2</sup>



#### FLETCHER LAKE

Perimeter: 0.86m  
Area: 0.01m<sup>2</sup>



#### SYLVAN LAKE

Perimeter: 1.26m  
Area: 0.03m<sup>2</sup>



#### SILVER LAKE

Perimeter: 0.89m  
Area: 0.02m<sup>2</sup>



#### LAKE COMO

Perimeter: 1.17m  
Area: 0.06mi<sup>2</sup>




Dimensions of coastal lakes that might benefit from terracing NNBF





Diagrammatic vision for Lake Como with excavated lake bottom, terraced perimeter with planted ecological communities, and trails.

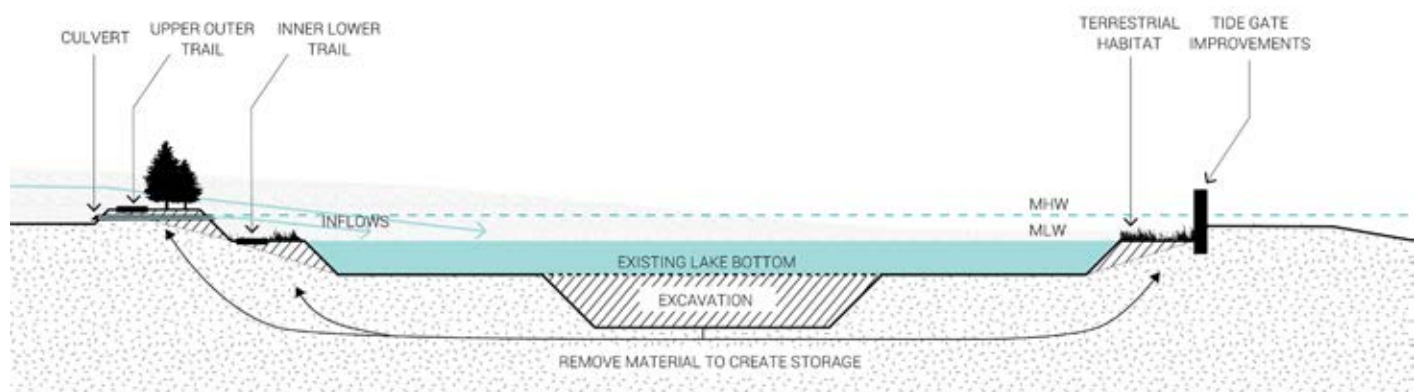

Diagrammatic section of coastal lake NNBF concept with excavated lake bottom, terraced perimeter with planted ecological communities, and trails.


# GREAT BAY AND LITTLE EGG INLET REGION

There are several L- and XL-scaled areas in this region that were studied by ERDC’s modeling team. The results of these model studies are briefly addressed in Part III of this report. Full results are detailed in the modeling team’s report. The modeling areas considered by ERDC include the Beach Haven Surge Filter, the Tuckerton Peninsula Barrier, Wetland and Island creation around Absecon and Brigantine, and Marsh Island creation around Great Egg Harbor.

The following four maps of the Great Bay and Little Egg Inlet Region provide broader context for the two design concepts in this report—(4) Tuckerton Peninsula Barrier and (5) Beach Haven Surge Filter—which were part of ERDC’s modeling studies. As projects that would require substantial material to contribute to CSRМ benefits by creating and expanding existing islands and marshes, their proximity to potential sediment sources such as the NJIWW, historic dredged material placement areas, and CDFs are highlighted here. Marsh loss is shown to indicate possible areas for restoration used to inform the location and shapes of NNBF in the following two design concepts.

## Legend

- Existing Marshlands
- Wetland Lost
- Reclaimed Land
- Beneficial Use Project
- CDFs and Historic Placement Areas
- Submerged Placement Areas (incl. Historic)
- NJIWW
- Drainage Ditch







Tuckerton Bay










Great Bay


Mordecai  
Island

## GREAT BAY AND LITTLE EGG INLET REGION

This map shows marsh loss, expected marsh erosion, and potential areas of marsh migration with one, two, and three feet of sea level rise. The prioritization and location of NNBF in this region should respond to sea level rise projections and the viability of maintaining marsh elevations and/or assisting marsh migration.

### Legend

-  Lost Wetland
-  Salt Marsh Erosion
-  Salt Marsh Conversion with 1' SLR
-  Salt Marsh Conversion with 2' SLR
-  Salt Marsh Conversion with 3' SLR
-  Marsh Migration Area with 1' SLR
-  Marsh Migration Area with 2' SLR
-  Marsh Migration Area with 3' SLR
-  Inhibited Marsh Migration Area








## GREAT BAY AND LITTLE EGG INLET REGION

This map provides a closer view of the areas where the Tuckerton Peninsula Barrier and Beach Haven Surge Filter features are located.

### Legend

- Existing Marshlands
- Wetland Lost
- Reclaimed Land
- CDFs and historic placement areas
- NJIWW
- Drainage Ditch
















Tuckerton Bay


Great Bay

## GREAT BAY AND LITTLE EGG INLET REGION

This map provides a closer view of the areas where the Tuckerton Peninsula Barrier and Beach Haven Surge Filter features are located.

### Legend

-  Lost Wetland
-  Salt Marsh Erosion
-  Salt Marsh Conversion with 1' SLR
-  Salt Marsh Conversion with 2' SLR
-  Salt Marsh Conversion with 3' SLR
-  Marsh Migration Area with 1' SLR
-  Marsh Migration Area with 2' SLR
-  Marsh Migration Area with 3' SLR
-  Inhibited Marsh Migration Area










## 4 TUCKERTON PENINSULA BARRIER

The Tuckerton Peninsula, and the Great Bay Boulevard that serves as its spine, provide access to a large wetland complex that stretches across most of the southern end of Barnegat Bay, buffering it from Great Bay to the south. While the feasibility of the Holgate Bay closure feature (that would have included the Great Bay Boulevard structure) was not preferred due to environmental concerns, the use of the peninsula as a CSRM feature is still under exploration, as it spans the majority of the bay.

This report looks at three possible options for a NNBF/CSRM feature located on or near the peninsula. These include a horizontal levee (which is the option that was modeled by ERDC), a series of offshore breakwaters, and an expanded marsh complex. Each concept is intended to provide some level of CSRM value while also enhancing local ecological conditions.


These options are not mutually exclusive. Any two options or even all three options could potentially be combined into a preferred alternative.






## 4a TUCKERTON PENINSULA: HORIZONTAL LEVEE OPTION


The horizontal levee option shows the elevation of Great Bay Boulevard to approximately +15 NAVD88, with shallow slopes (1:30) extending away from it into the marshes on either side. These slopes could be planted with marsh species at their bases and then transition into shrubland for most of their flanks, before reaching a mowed meadow near the levee crest. This option would provide significant resistance to storm surge moving across the Tuckerton Peninsula, but it would require a large volume of fill to construct.






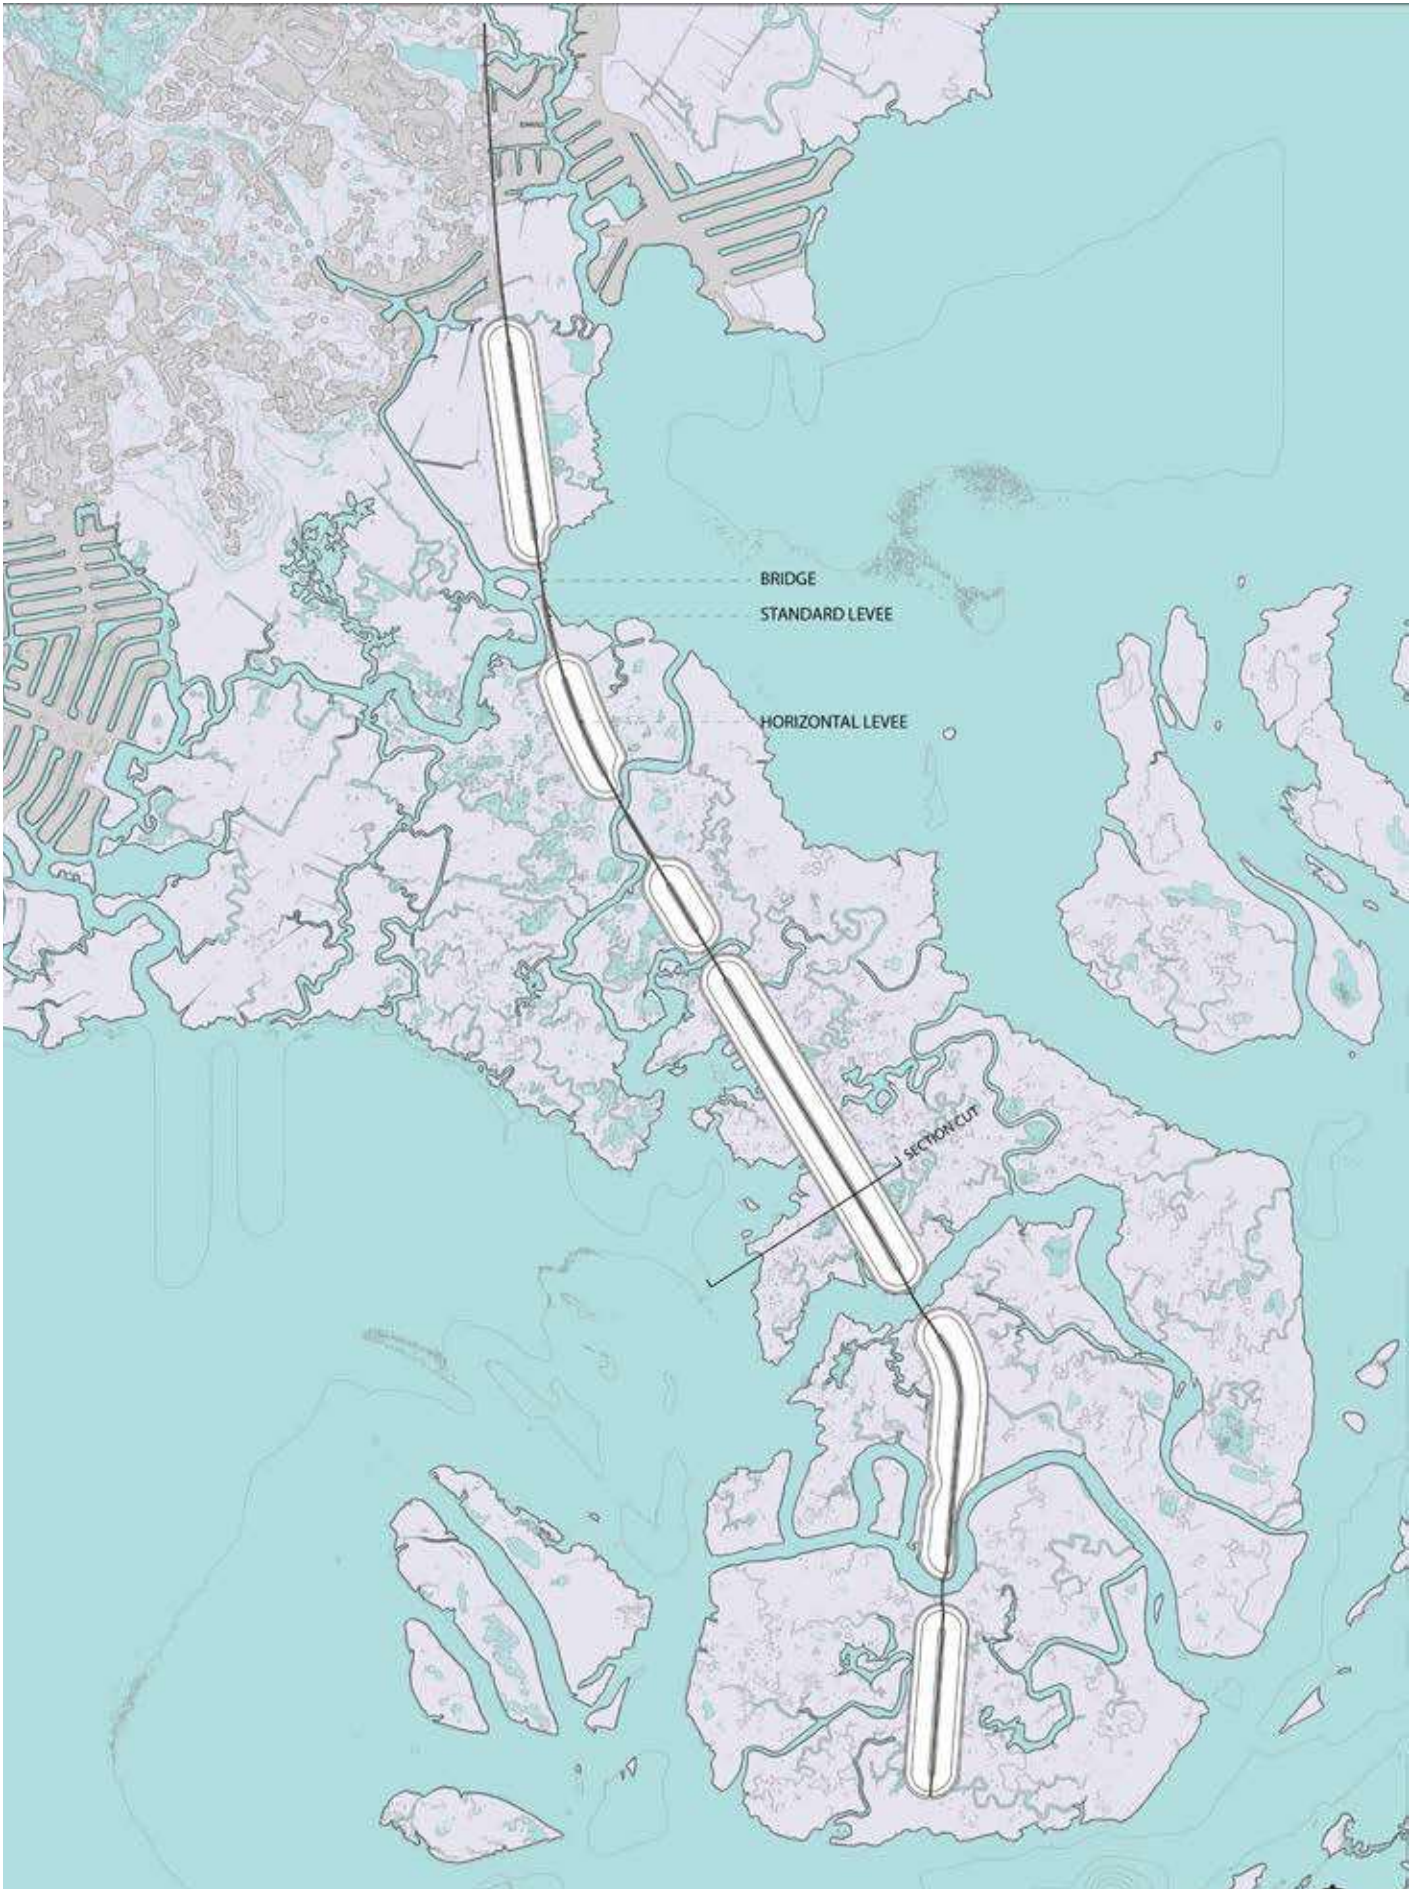


4a TUCKERTON PENINSULA:  
HORIZONTAL LEVEE OPTION

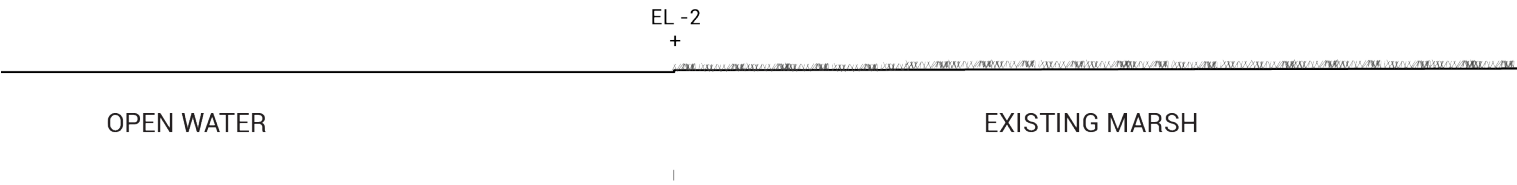


4a HORIZONTAL LEVEE

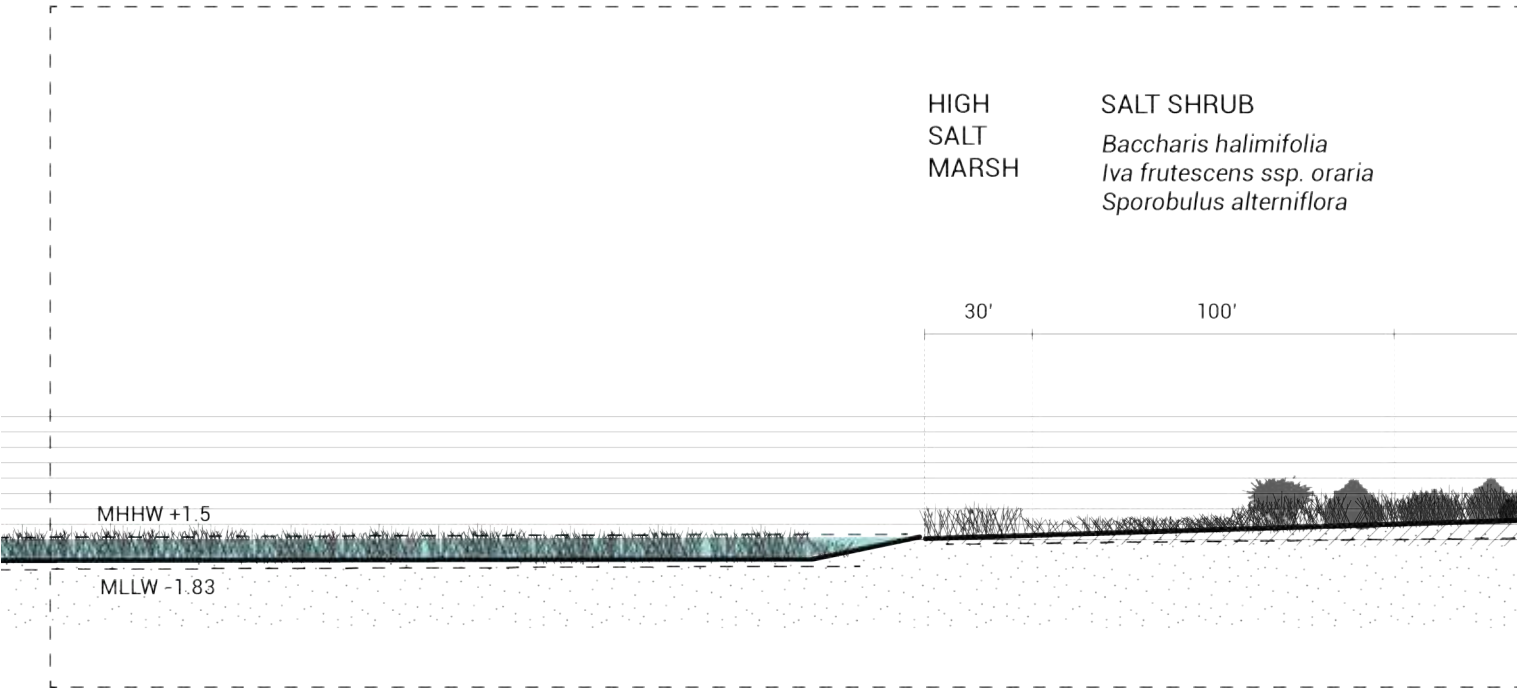

DETAIL 4a.1

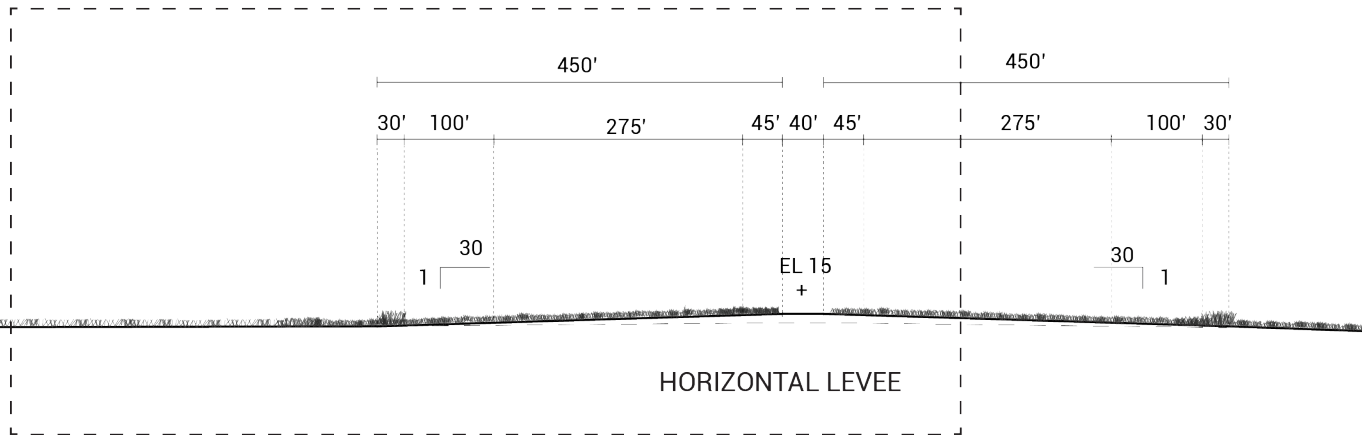


DETAIL 4a.1

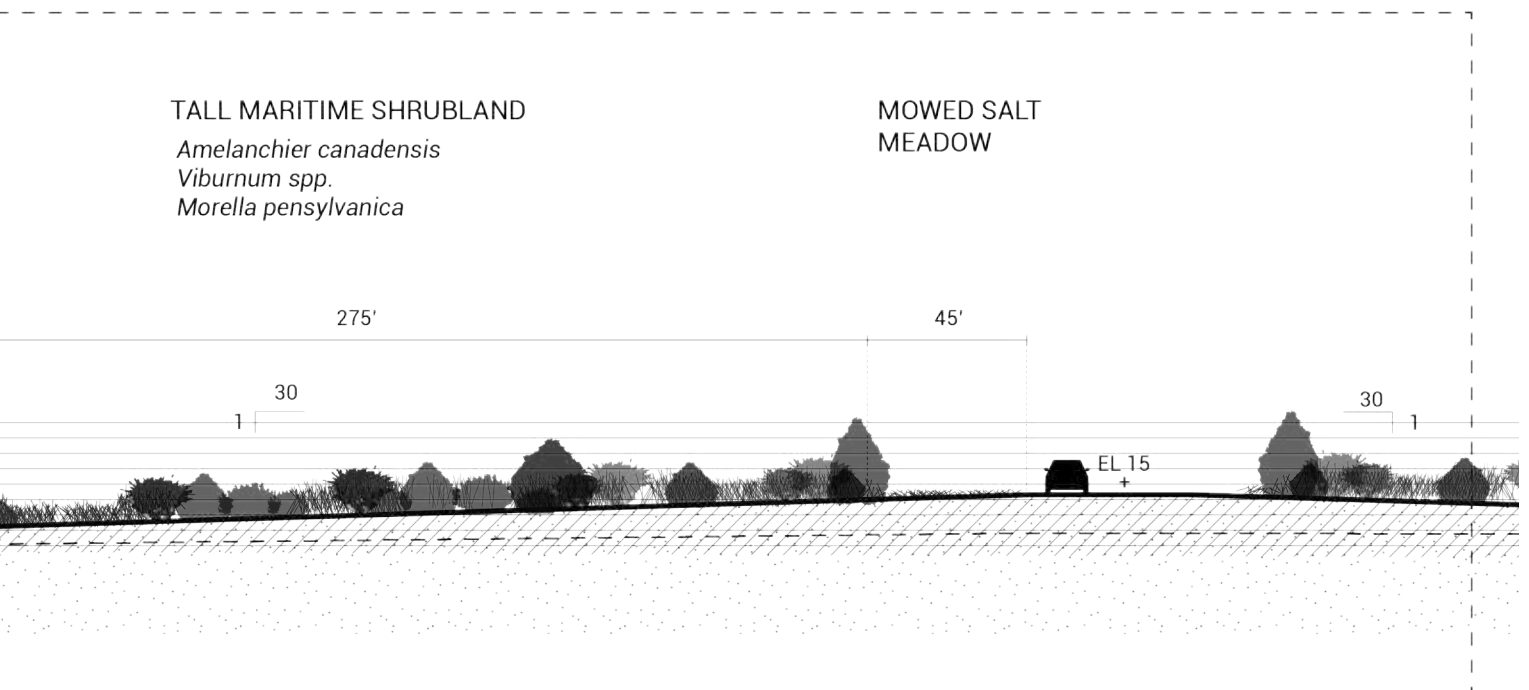

## 4b TUCKERTON PENINSULA: LIVING BREAKWATER OPTION


The living breakwater option moves the surge resistant features offshore and southwest into Great Bay, where a series of linear breakwaters could be designed to double as habitat features for shellfish, crustaceans, and fish. A case study of a similar project off Staten Island is noted in Appendix 2.








# 4b TUCKERTON PENINSULA: LIVING BREAKWATER OPTION

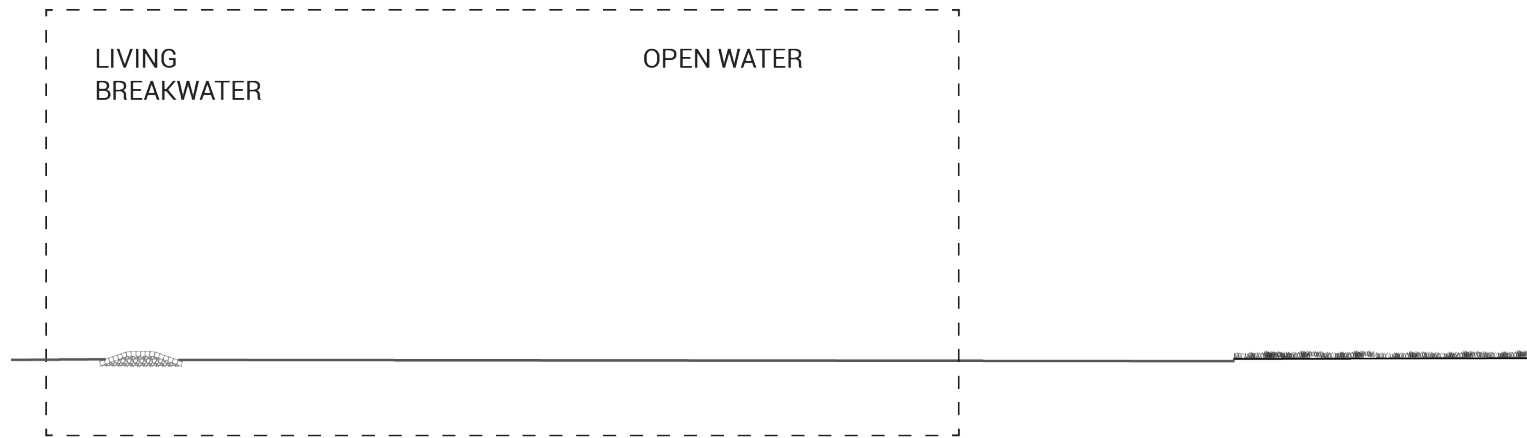

DETAIL 4b.1


## 4b LIVING BREAKWATER

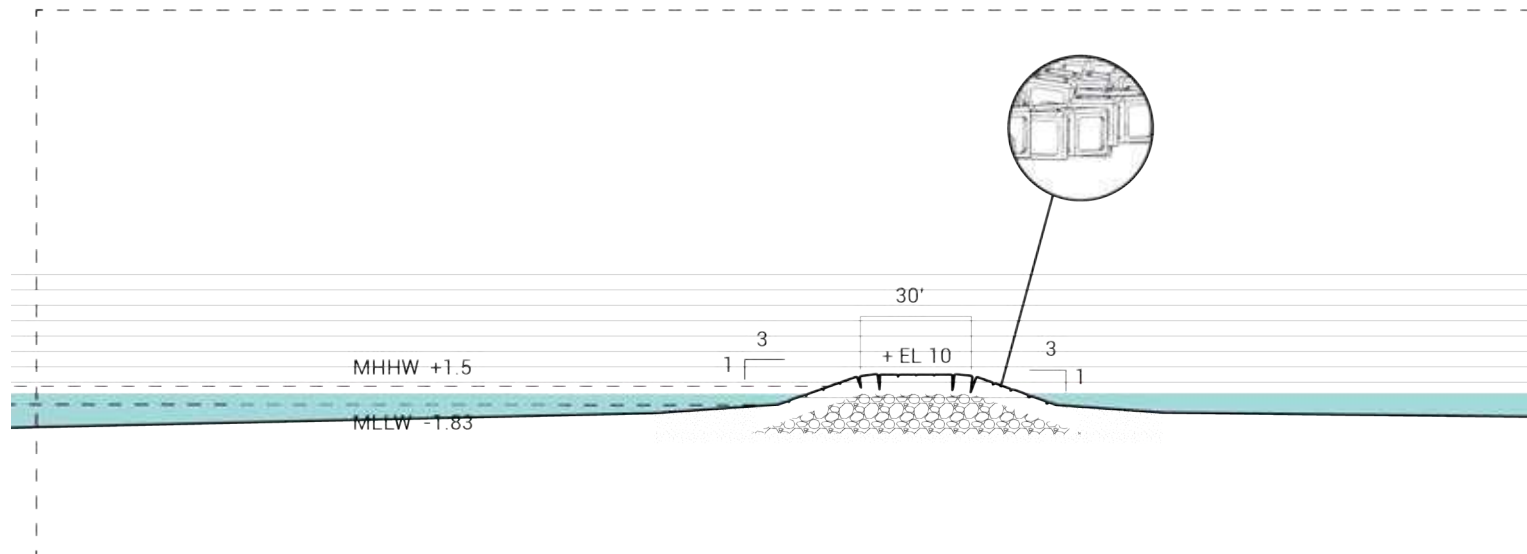

DETAIL 4b.1

MARSH

SUBSIDED  
AREAS

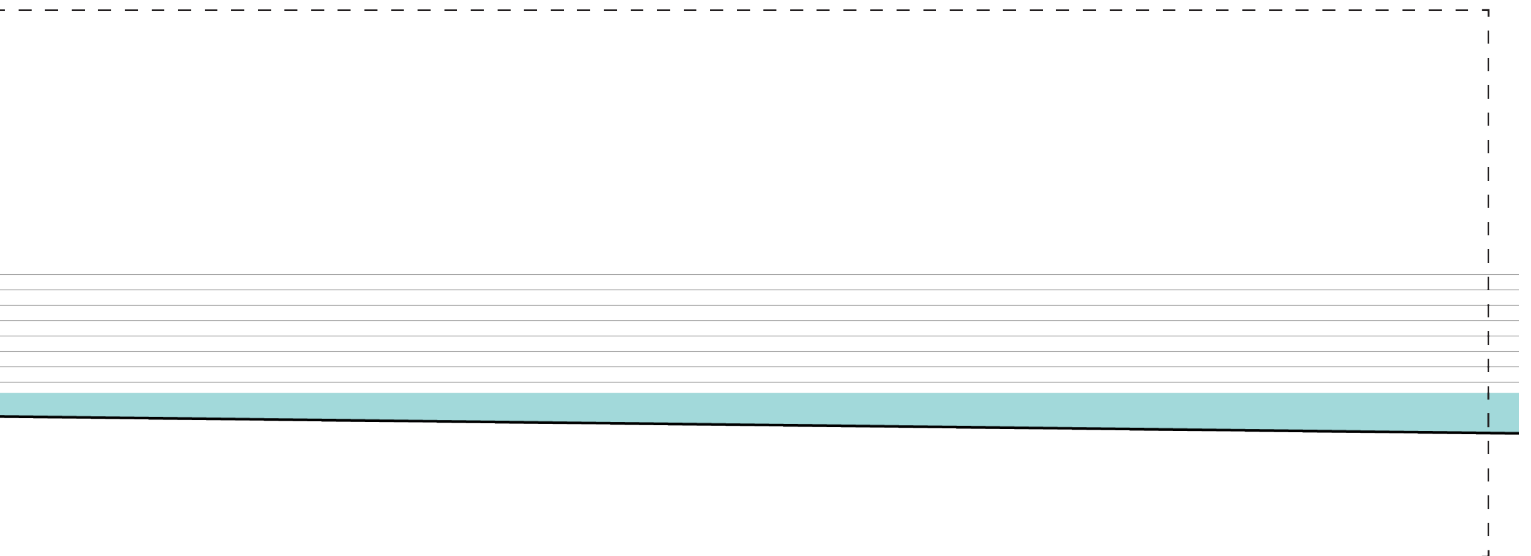





## 4c TUCKERTON PENINSULA: MARSH AUGMENTATION OPTION

The third option, marsh augmentation, would involve expanding existing marsh islands, constructing new marsh islands, restoring subsided portions of the Tuckerton Peninsula marshes through thin-layer placement, and potentially constructing a series of small salt shrub “hammocks” to the southwest of the Great Bay Boulevard.


Like the Horizontal Levee Option, this option would require significant volumes of sediment. Possible sources for this sediment include the beneficial use of dredged material, mining of existing spoil islands and CDFs, and dredging of inlet shoals. These sources are indicated in the map on page 51.



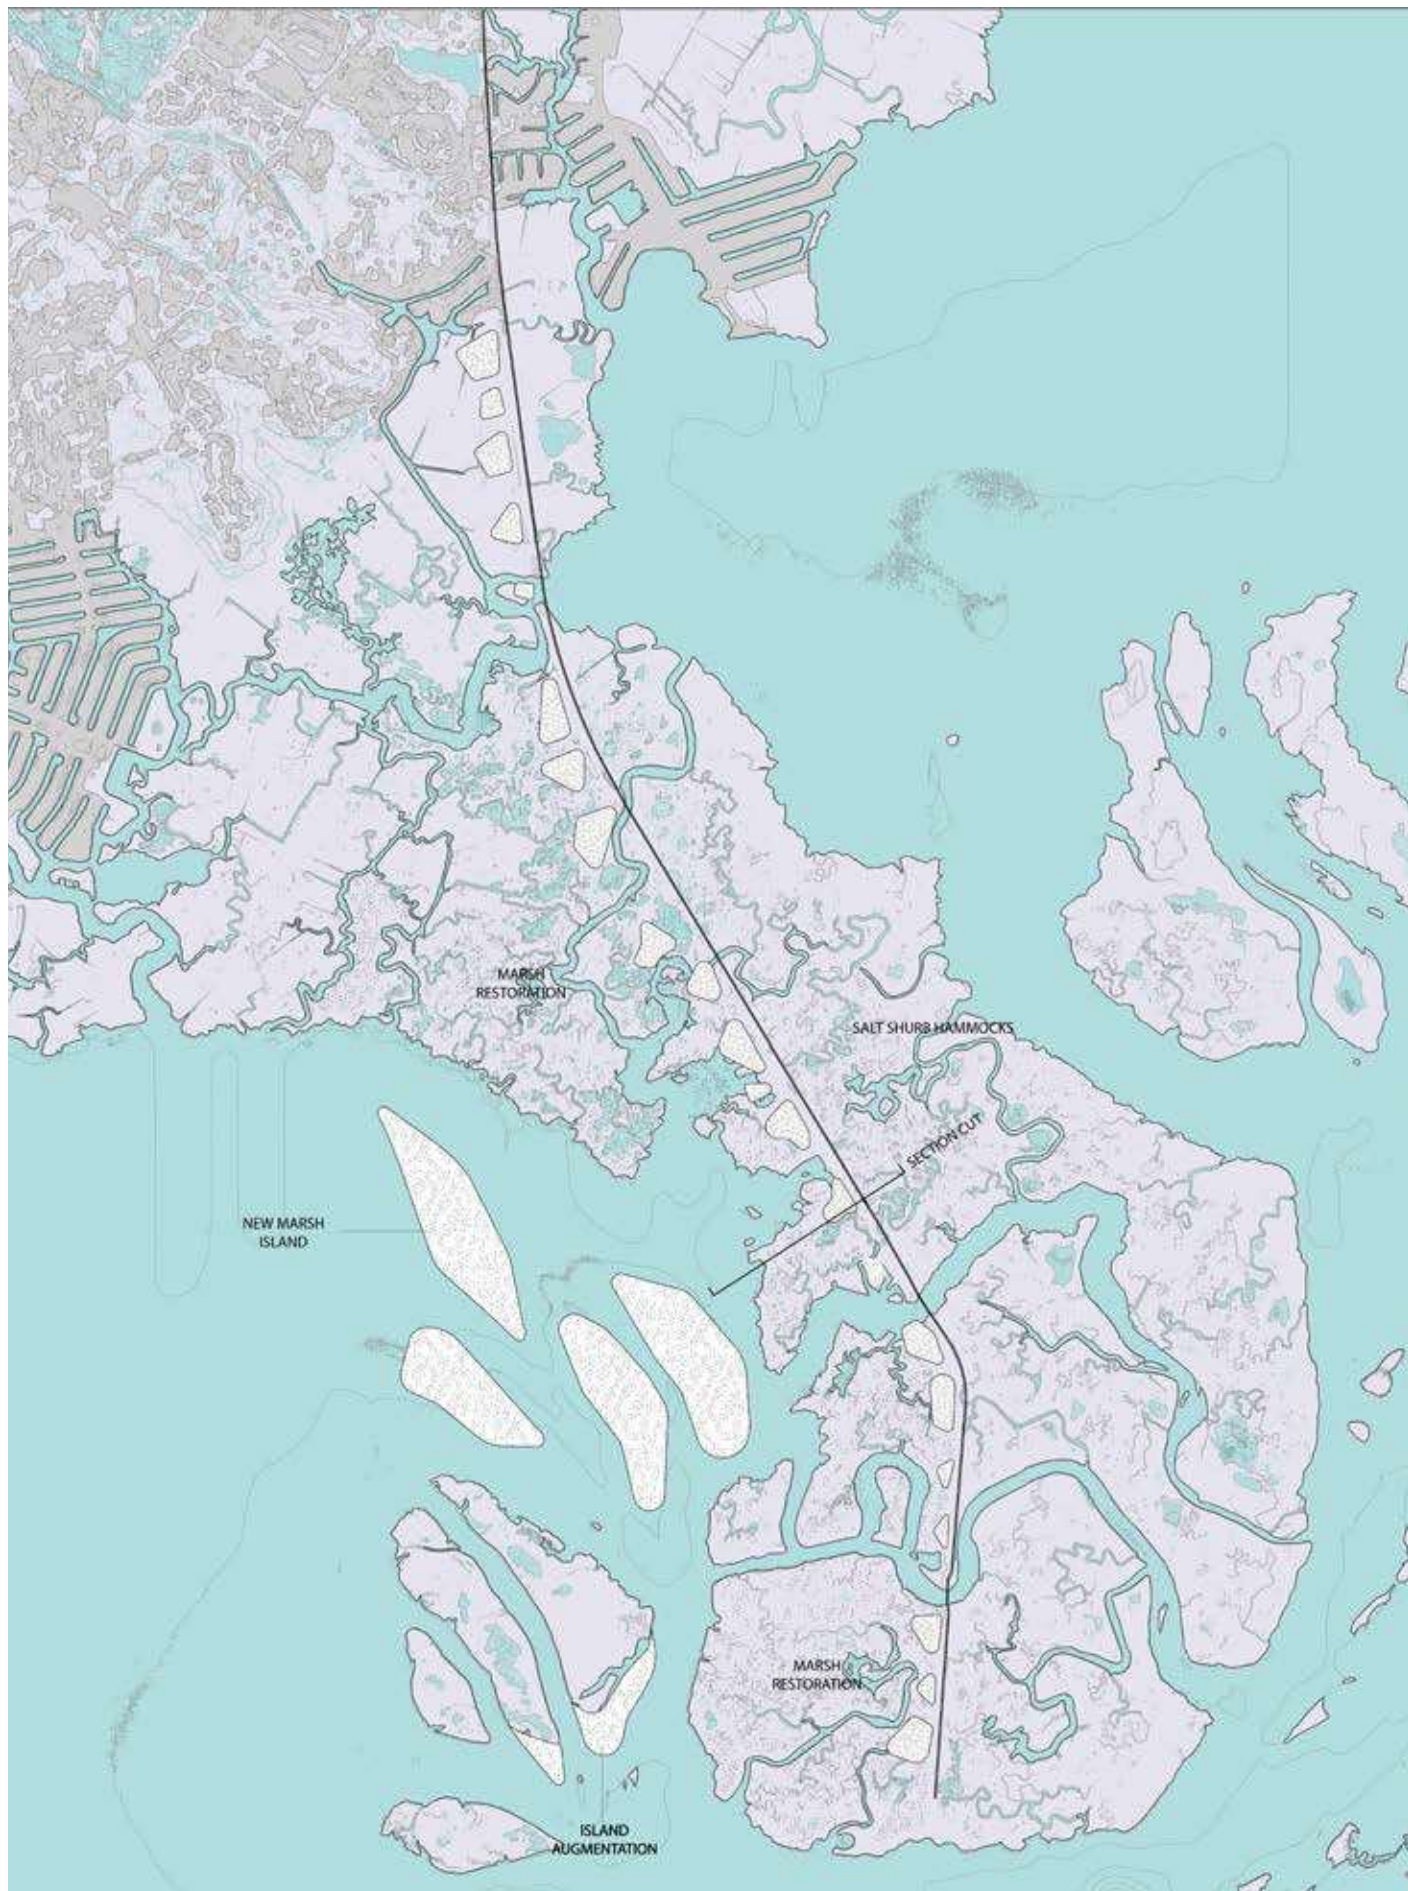


4c



# TUCKERTON PENINSULA: MARSH AUGMENTATION OPTION

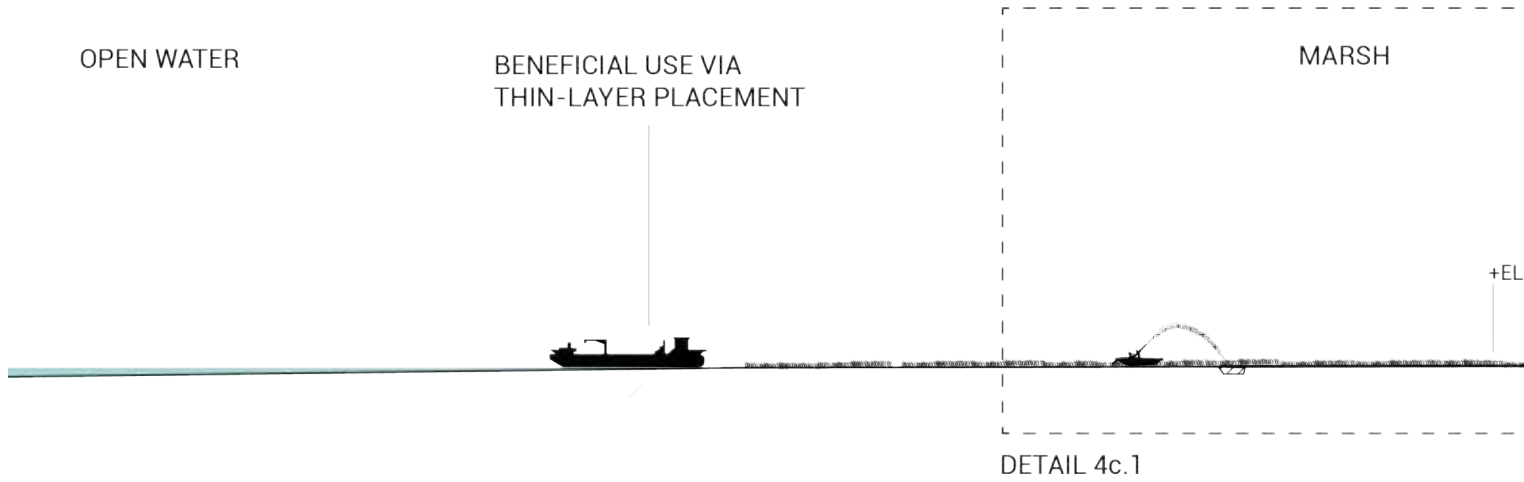

## 4c MARSH AUGMENTATION

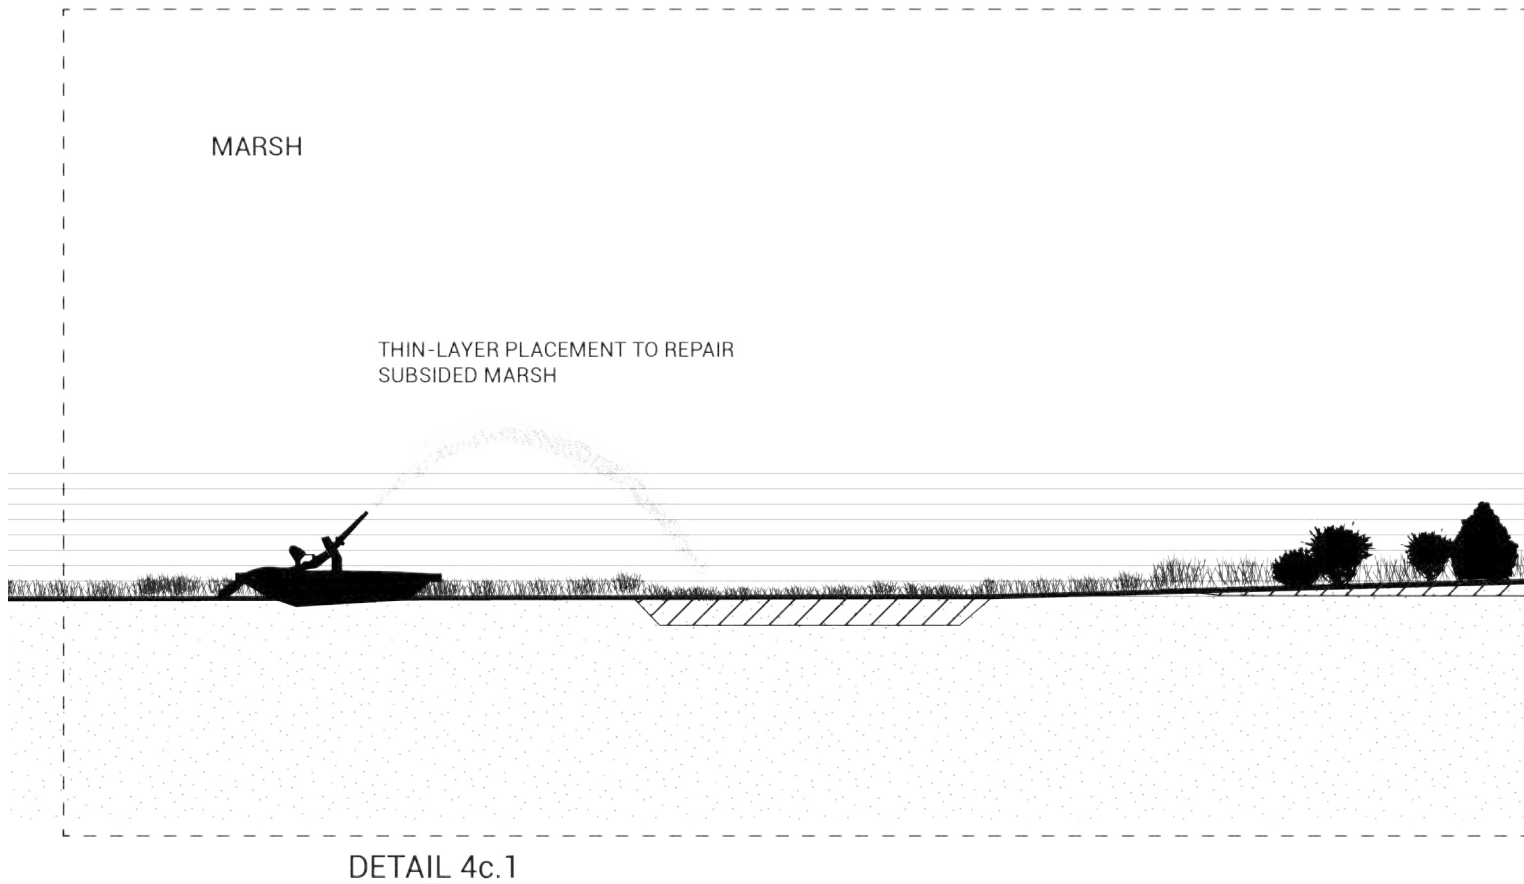



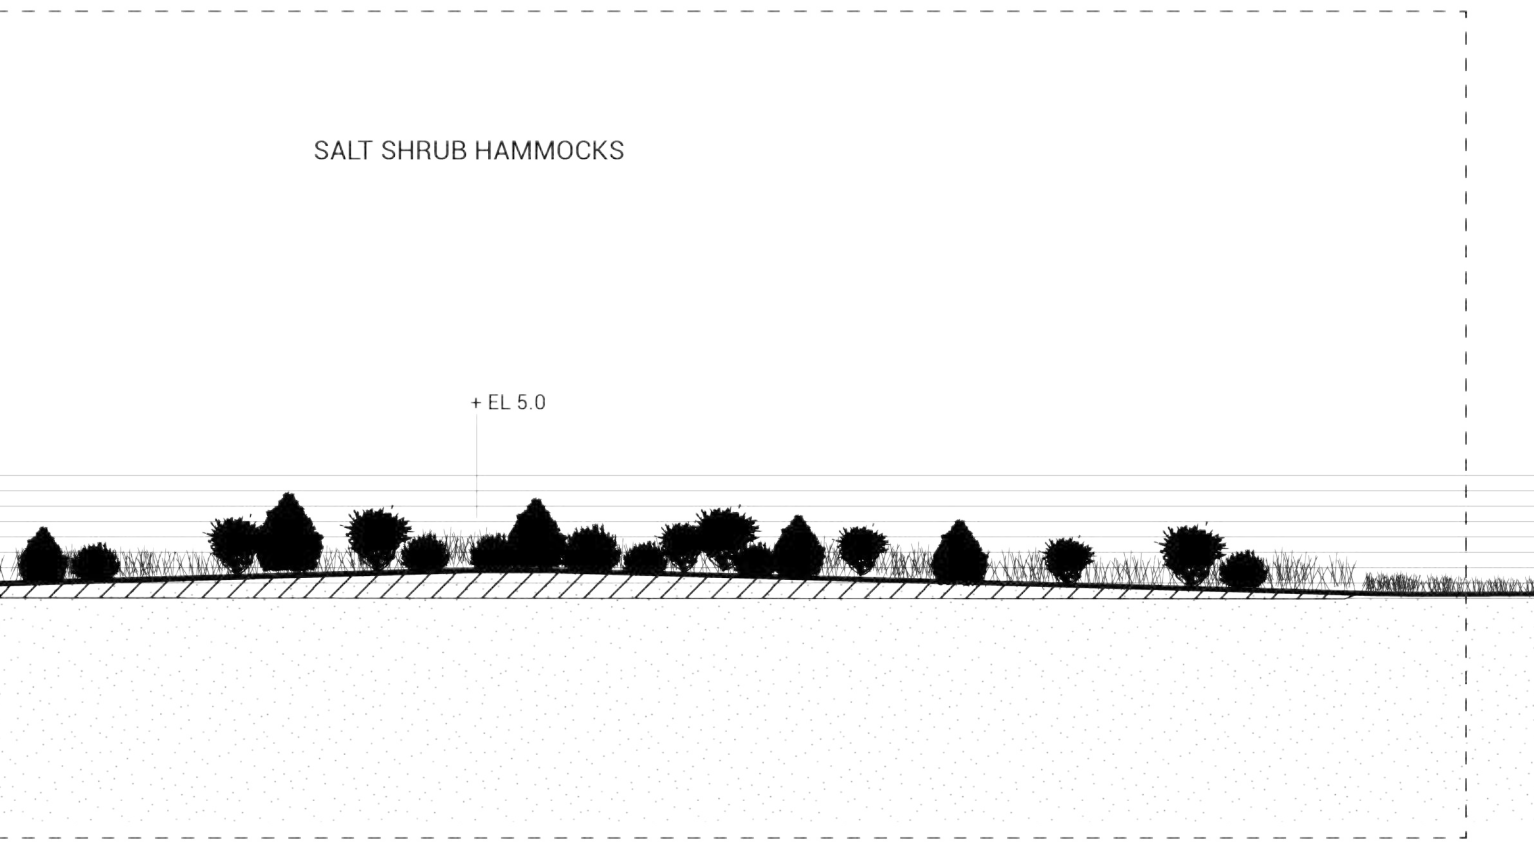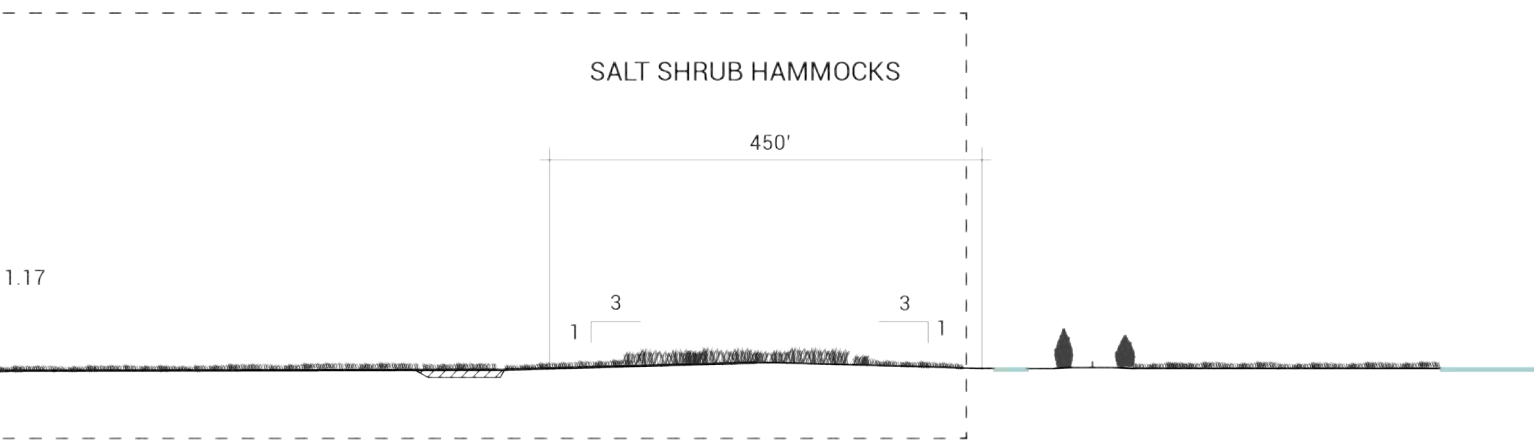

4c

**TUCKERTON PENINSULA:  
MARSH AUGMENTATION  
OPTION**







View of marsh augmentation option from the southern end of the Tuckerton Peninsula, looking back into Great Bay



## 5 BEACH HAVEN SURGE FILTER

This report has focused attention on the design concept for the surge filter feature near Beach Haven as an example of the kind of NNBF that has been studied via modeling. The Beach Haven surge filter is somewhat smaller and more geographically prescribed compared with the other XL options being modeled. This geographic specificity provides a better opportunity to describe the spatial features of the marsh island creation project, and provides some specifics whose application could be imagined throughout the entire region.


The site of the Beach Haven surge filter is located northeast of the Tuckerton Peninsula and Great Bay Blvd wetland complex. The area is presently the location of a series of shifting sedge islands that vary in size from over 300 acres (Story Island) to intermittent exposed areas of well under 1 acre. The elevation of many of these islands does not exceed +3' NAVD88. The Intracoastal Waterway runs to the east of the islands, between them and the barrier island community of Beach Haven.



## 5 BEACH HAVEN SURGE FILTER

For the surge filter design concept, several assumptions have been made. The first and most significant of these was that the performance of the surge filter will increase as the density of islands and marshes increases. Consequently, the surge filter is, practically, a thickening of the density of the existing marshes. Following this, several other guiding principles were established. These principles are subject to future modification in light of further modeling. The principles that were established for the design concept were:

- Attempt to limit the volumes of sediment needed to generate results by focusing attention on areas that either are already shallow ( $-3.5'$  NAVD88 or less) or have been exposed in the past.
- Placement in deeper water might be justifiable in particular locations. For example, a recent report (McKenna 2018) suggested that significant marsh loss is occurring along the northeastern edge of the Tuckerton Peninsula due to northeastern storms, so increasing marsh and island locations to the west of the present sedge islands might provide protection and reduction in the observed marsh loss.
- The proposed design approximately doubles the quantity of land exposed during MLLW within Sedge Island area.
- Island and wetlands created would be planted with *Sporobolus alterniflora* in the zones between MTL and MHW ( $-.26$  NAVD88 and  $1.17$  NAVD88). Over the next 50 years, sea-level rise estimates vary, but it seems safe to expect at least a  $2'$  rise over this period (Miller 2014). Islands should provide elevation for high marsh and possibly upland planting in the present scenario, thus providing room for low spartina marsh to migrate up as sea levels rise.







## 6 SEVEN MILE ISLAND INNOVATION LAB

The Seven Mile Island Innovation Lab is a ~24 square mile collection of tidal salt marsh and barrier island communities located between the Townsends and Hereford inlets in the southern region of the Interim Feasibility Report. The Lab was announced in 2019 as a collaboration between the USACE, the Wetlands Institute, and the state of New Jersey. A large working group of over 30 individuals takes part in the development and design of the projects within the Lab.


The primary objective of the Lab is to develop and test innovative methods of sediment management that can not only address the continual management of shipping channels (the New Jersey Intracoastal Waterway runs through the Lab) but also develop processes that can capture multiple benefits of sediment within the back bay environment.

This work builds on a collection of projects that have been done in and around the Lab site that attempt to capture the benefits of EWN principles while undertaking sediment management projects, including the enhancement of marshes, the construction of elevated nesting areas and the development of new mudflats. Future projects will continue this trend and include a robust set of monitoring protocols to evaluate project performance. These include the likely expansion of Gull and Sturgeon Islands.

While the Lab is not fundamentally tasked with the development of strategies that address CSRM, the practices and procedures developed there do address questions of marsh flooding, edge erosion, and habitat establishment. The known ability for marsh density to aid in the reduction of storm damage thus makes the work being undertaken at the Lab considerably linked to CSRM topics.

### Legend

-  Habitat Restoration Projects
-  Confined Disposal Facilities
-  New Jersey Intracoastal Waterway
-  Previous Placement Locations
-  Potential Future Restoration Concepts
-  Potential Sediment Release Study Locations









## 7 BARNEGAT BAY SHALLOWS

The CSRM benefits of NNBF in shallow bays like the Back Bays generally compound as the scale and extent of features increase. For example, research suggests that one mile of vegetative wetland extent can reduce storm surge heights up to one foot (NOAA, 2020). While smaller vegetative wetland features may provide significant local CSRM benefits, there are larger scales of NNBF that should be considered to maximize regional CSRM benefits. This section explores this idea through a series of “projective mappings” that are suggestive of the largest feasible extent for these NNBF in a projective scenario, showcasing areas where further XXL scale studies and modeling could occur.

In the case of Barnegat Bay, the range of possible NNBF opportunities will vary across the bay, based on site conditions and local objectives. The bay-scale “projective mappings” show some of this complexity and identify sites that have experienced significant levels of human and ecological change over time, including areas of marsh change, significant filling, ditching, dredging operations, landcover, and developed areas. An investigation of these areas reveals three types of opportunities for NNBF with CSRM benefits at the XXL scale:

**1. Systems Approach** of implementing NNBF through the redesign of management practices of built and ecological systems over time, including sediment management, marsh enhancement, and resource protection. Systems approaches are well suited to adaptive management practices with the flexibility to change over time.

**2. Scaling Up** of previously identified NNBF identified in other sections of this report (S, M, L features). These features could be applied across larger extents or multiple geographic locations in the near term.


Piloting and further study may be required to scale up these ideas.

**3. Linking with Nonstructural Measures** where the suite of applicable NNBF may expand as land uses change. With sea level rise and the implementation of non-structural CSRM measures like building elevation and relocation, today’s highly vulnerable areas may become sites for future NNBF with additional CSRM benefits. This possibility is explored in more detailed in Part IV of this report.

The map shows sites of historic dredge material placement and dredge holes located and investigated by the Stockton University Coastal Research Center. The spatial parameters of dredge holes (subaqueous borrow pits) were acquired for future restoration. The team’s data and report includes GPS elevation surveys, volume calculations, sediment samples, and a cataloguing and analysis of berms, vegetation, and site-specific features using photography of historic dredge material placement sites. Their work is an important resource for the strategies presented here.

### Legend

- Dredged Hole
- Unconfined Disposal Site
- Confined Disposal Facility
- + Confined Disposal Site
- Other
- NJIWW
- Watershed





## BARNEGAT BAY SHALLOWS










The **Systems Approach** involves changes to the management practices that shape the bay, including sediment management, marsh enhancement, and resource protection.


One example of an XXL systems approach is a long-term plan to maximize the use of dredged sediment to create NNBF with ecological and CSRM benefits. The map at right identifies the navigable waterways, ditched wetland canals, and CDF placement sites which hold sediment extracted from previous dredging projects within central Barnegat Bay. An analysis of annual dredging volumes and locations, current CDF capacity, and dredge material quality and grain size could reveal the amount of material available for NNBF creation on annual or decadal cycles. A modeling study could evaluate the CSRM benefits and ecological impacts of this sediment applied across a range of scenarios at various locations, scales, and methods of application. For example, if the goal was to use dredge material for CSRM through the construction of NNBF, would it be most effective to focus on wetland construction directly adjacent to vulnerable Lagoon Communities or expand the number of Surge Filter landscapes within the Bay? While the scope of these questions exceeds the limits of this study, this XXL scale of design investigation is a logical next step to advancing NNBF within Barnegat Bay in a meaningful way.

The Systems Approach to XXL design has been pursued by other projects more extensively and suggest that this scale of thinking is worthy of further study. The SCAPE team's entry to the US Department of Housing and Urban Development competition "Rebuild by Design" developed an entry titled "The Shallows" that included an XXL scale approach to wetland restoration, living shoreline edge protection, and shallowing of portions of the Bay. Working with team partners at The Stevens Institute, preliminary modeling by the SCAPE team showed that two different NNBF XXL scale approaches may reduce flood water heights by 15-20% in surge events and reduce or eliminate wave damage within bay

neighborhoods. While further research and refinement is required, this work suggests that XXL approaches may have more comprehensive CSRM benefits than individual interventions.

### Legend

-  Lost Wetland
-  Salt Marsh Erosion
-  Salt Marsh Conversion with 1' SLR
-  Salt Marsh Conversion with 2' SLR
-  Salt Marsh Conversion with 3' SLR
-  Marsh Migration Area with 1' SLR
-  Marsh Migration Area with 2' SLR
-  Marsh Migration Area with 3' SLR
-  Inhibited Marsh Migration Area







## 7 BARNEGAT BAY SHALLOWS

A second Systems Approach example of XXL NNBF would be to investigate and quantify the current CSRM value of today's coastal wetlands and upland forests. A study could be pursued that would model various storm events with and without today's vegetative wetland and forest cover, with varied rates of SLR. This study could analyze whether today's wetlands provide CSRM benefits in current and future conditions and could also isolate significant zones of wetlands that provide the most CSRM benefits to vulnerable populations. As vegetated wetlands are also vulnerable to sea level rise, this information, in combination with ecological and social goals, could help guide management and resource conservation decisions around wetlands. For example, it could be beneficial to use sediment resources to maintain existing wetlands at particular elevations (with thin-layer placement or other NNBF methods) to reduce risks to lagoon communities that benefit from wetland CSRM impacts today. Management and conservation practices around wetlands, including wetland migration planning and wetland augmentation, could shift to incorporate new research around the potential benefits of preserving these features.


**Scaling Up** involves the application of previously identified NNBF (S, M, L, and XL features) across multiple similar sites within the Bay. These features could be applied across larger extents within a single project area or multiple geographic locations that share certain environmental characteristics. For example, living breakwaters may be an appropriate strategy for many of the vulnerable lagoon communities that line the inland edge of Barnegat Bay. It is important to require physical piloting and monitoring at a small or medium scale to test the viability of these strategies before applying them more comprehensively to similar sites throughout the region. Strategies identified in this report with regional applicability for Scaling Up include:

- Living Breakwaters: Potentially applicable to inland edges with significant development vulnerable to wave action and erosion
- Upland Forest Restoration: Potentially applicable to vacant parcels or existing upland forest areas with poor vegetative cover along the upland edge of the Bay
- Augmentation of Existing Marshes: Potentially applicable to all areas of the bay that have existing vegetative wetlands depending on rates of sea level rise (includes thin layer placement and ditch filling)
- Shallowing: Potentially applicable to dredge holes and/or submerged portions of the bay with poor habitat value
- Horizontal Levees: Potentially applicable to sites where levees are planned adjacent to upland transition zones, and / or sites where wetlands have little migration space and fringe marsh habitat would

The projective mapping at right identifies area of Barnegat Bay where NNBF can be considered at a regional scale, including ditched wetlands, lagoon communities built on filled land, and upland forest areas.

### Legend

- Lost Wetland
- Canal Ditching
- Mudflats
- Historic Fill
- Historic Dredge Material Placement
- Submerged Dredge Material Placement
- NJIWW










## BARNEGAT BAY: STRATEGIES


The most extensive NNBF strategy for the bay would include NNBF across a full transect from upland (reforestation of the maritime forest and shrublands), through existing marshes (augmented by ditch filling and thin-layer placement), to subaqueous habitat including mudflats (which could be expanded through further thin-layer placement) and SAV beds (which could be expanded through 'shallowing' and the filling of dredge holes). Living breakwaters could also be placed to complement these NNBF. Here, one typical section across Barnegat Bay collates this range of NNBF.

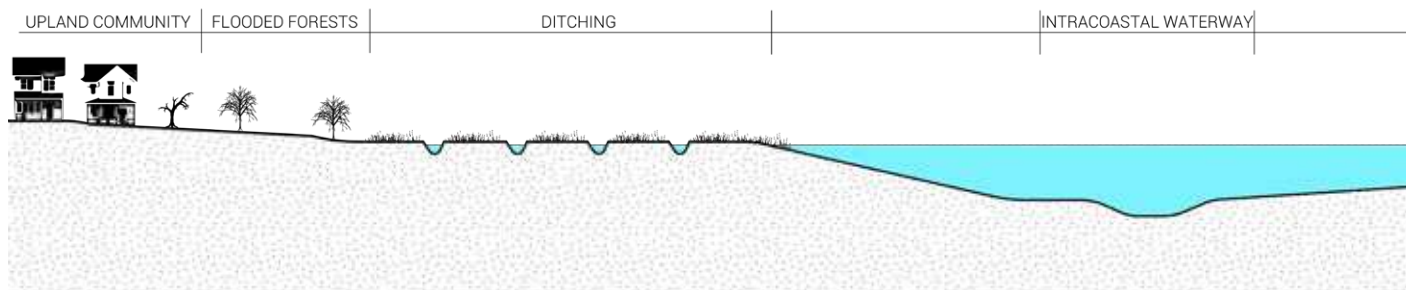

UPLAND

MARSH

BAY

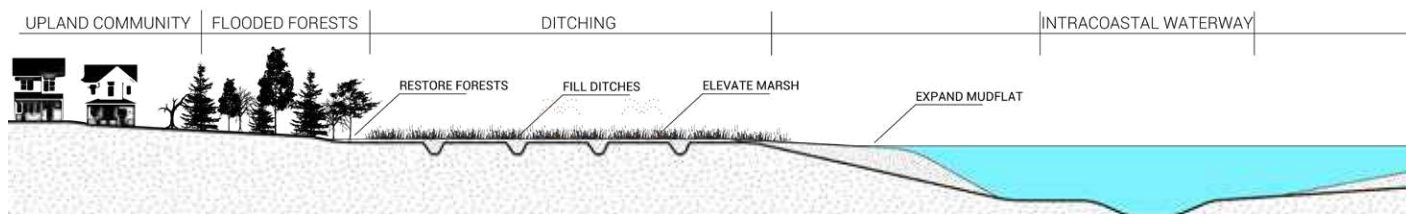


Diagrammatic sections showing the current condition (top) and general strategies applied (bottom) across a typical transect within Barnegat Bay.


**Linking with Nonstructural Measures** involves the consideration of future threats of SLR and storm surge in highly vulnerable areas where repeat losses have occurred and nonstructural measures like building elevation and relocation may be implemented. The potential exists to expand implementation of NNBF in concert with non-structural solutions at the XXL scale, as significant zones of urban areas are likely to use non-structural strategies to respond to sea level rise and storm surge in the long term. For example, relocation is sometimes a viable strategy for communities that experience repetitive loss of property and assets. As a process, relocation requires community buy-in and thoughtful discourse, and should include a

robust discussion of the future management of the remaining land. NNBF should be considered in these conversations, particularly when they provide ecological and CSRM benefits to the larger regional population at the XXL scale.

Part IV of this report discusses the potential relationships between nonstructural measures and NNBF in more detail.

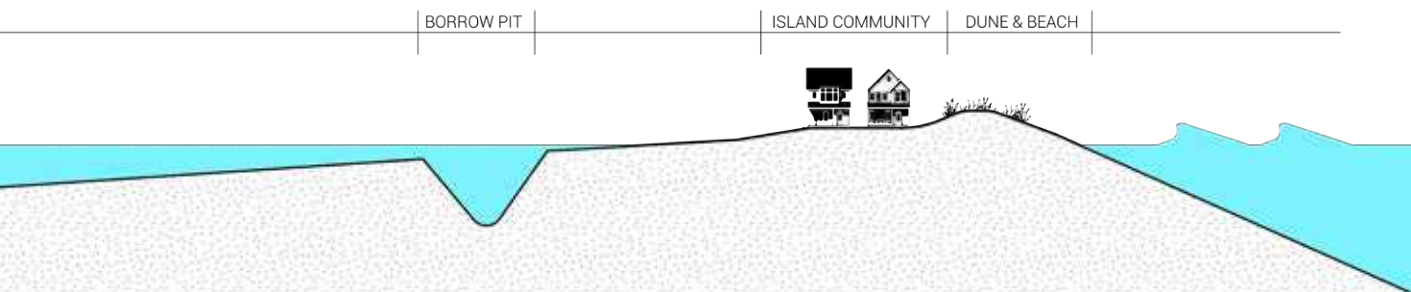

## BARRIER ISLANDS

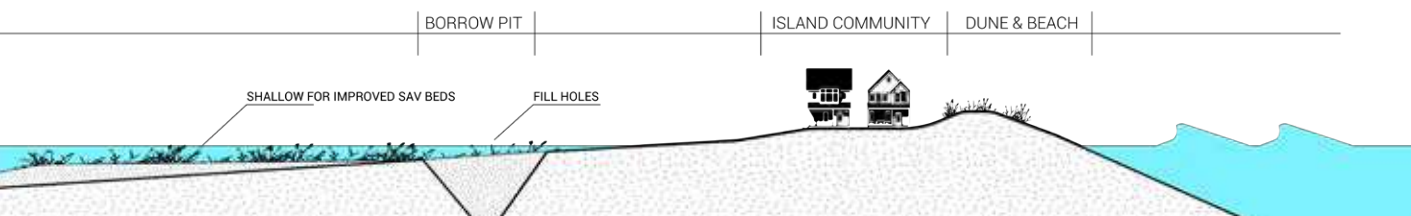






# Part III

## NNBF PERFORMANCE AND SUITABILITY: LINKING MODELING AND DESIGN

While this report was being developed, a concurrent modeling effort was being undertaken by a team at the Engineer Research and Development Center (ERDC) in Vicksburg. This section shows some of the results of this modeling and offers potential next steps for further integration of modeling and design. The full report on the ERDC modeling effort is entitled “Enhanced Modeling in Support of Recommended EWN/ NNBF Measures and Efficacy in Providing Flood/Storm Risk Reduction”.


As indicated on page 38 of this report, there were four distinct areas chosen for modeling. Two of these areas, the Great Bay Blvd Horizontal Levee and the Beach Haven/Holgate Surge Filter have been combined into one modeling region simply referred to as Holgate. Though done concurrently with the work described in this report, the selection of these areas and the morphologies of the NNBF modeled within them were developed independently by the modeling team, although we take no distinct issue with the sites, morphologies, or storm scenarios that were chosen. Our understanding is that, after site selection, these sites were ‘filled’ in the model with as much wetland soil and vegetation as was possible, taking standard slopes and necessary water movement into consideration. The footprints of these model areas and the morphologies of the modeled wetlands are shown on the following pages of this section.

The intention of this process was to demonstrate the efficacy that NNBF features (constructed marsh islands, in this case) could have in responding to storm surge and wave height so that designs could be located and scaled appropriately. Due to the assessment metrics established for the New Jersey Back Bay study, only benefits associated with Coastal Storm Risk Management (CSRM) were considered when evaluating the results of the models. This evaluation does not, as a result, incorporate or quantify the obvious ecological and potential social benefits that typically accompany NNBF strategies. Nonetheless, the modeling to date is an important step toward evaluating the potential performance of NNBF in the New Jersey Back Bays. It can and should be built on.

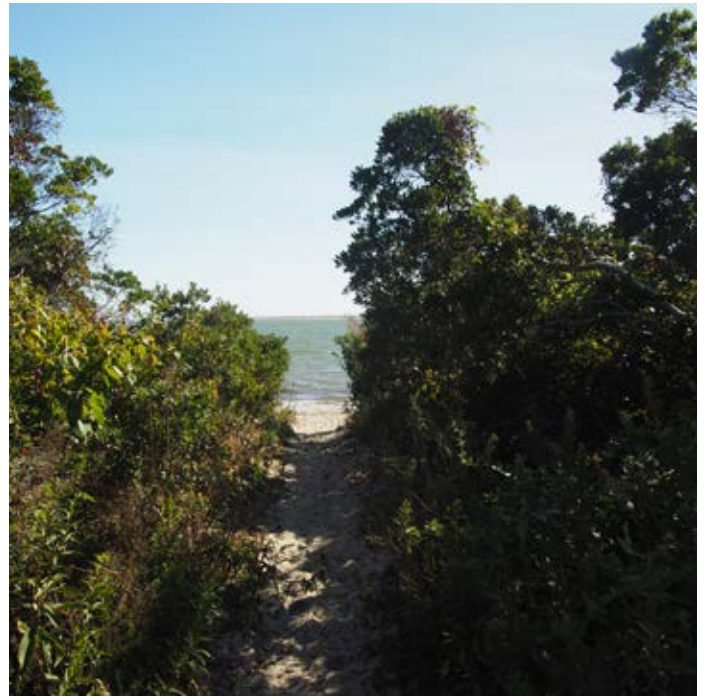

The enhanced wetlands proposed will augment the existing wetlands of the region



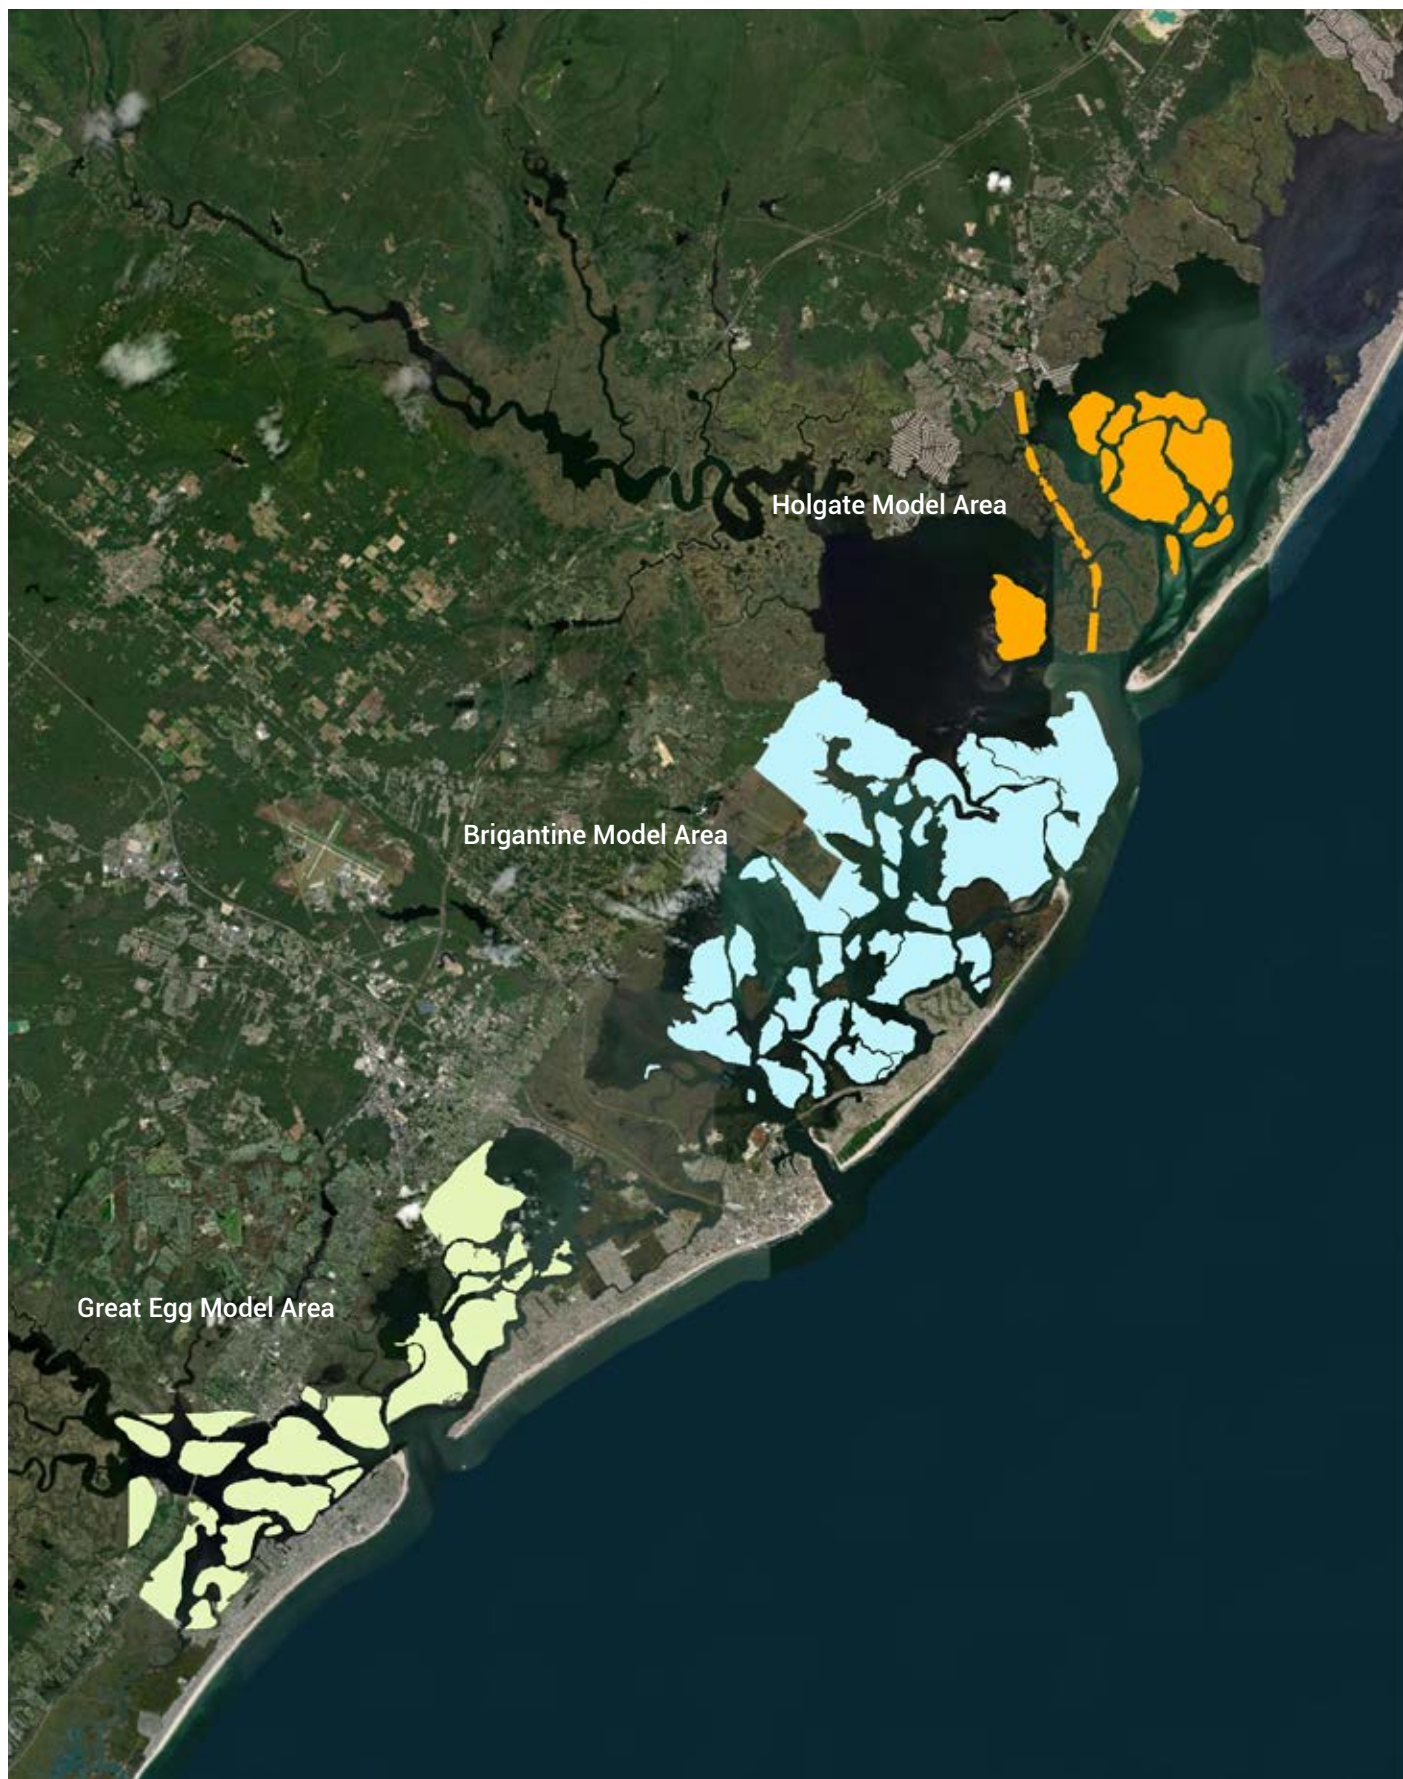


NJBB region with the three model areas identified by color




## HOLGATE MODEL AREA


The Holgate model area consists of two NNBF features; the first is a collection of newly elevated marshes on either side of the Tuckerton Peninsula and the other is a horizontal levee constructed in concert with the raising of Great Bay Blvd. The images below and to the right were pulled from the ERDC report and were produced by the modeling team.

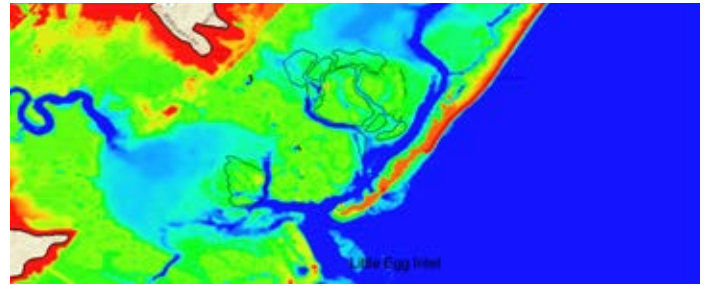


Holgate Model Area Existing Elevations

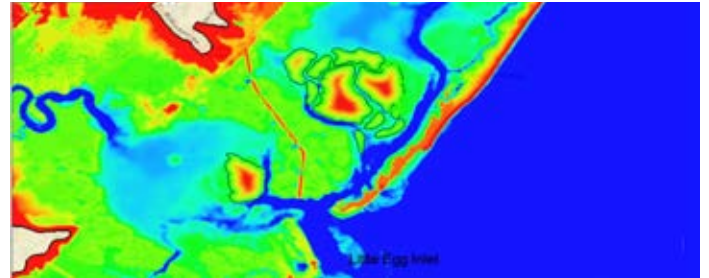

Holgate Model Area Modeled Elevations

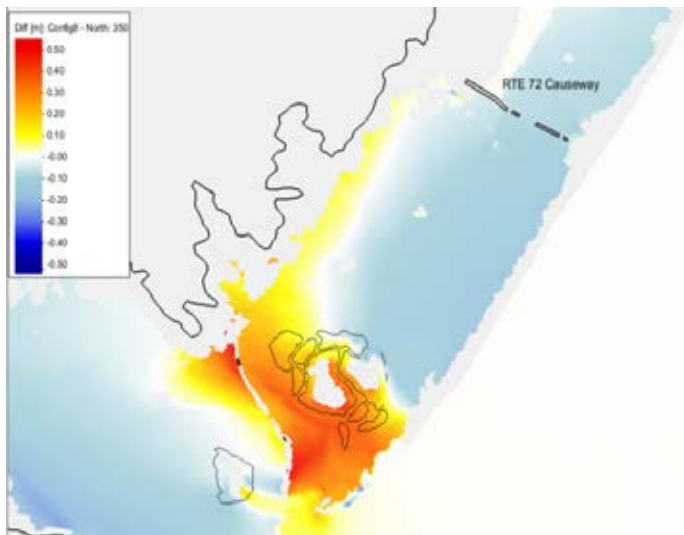


Water Surface Elevation Effect, Storm 350

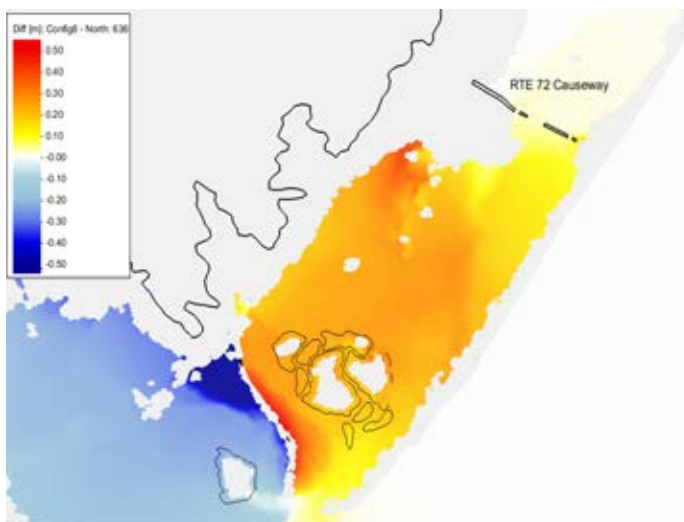

Water Surface Elevation Effect, Storm 636



Footprints of Holgate model features

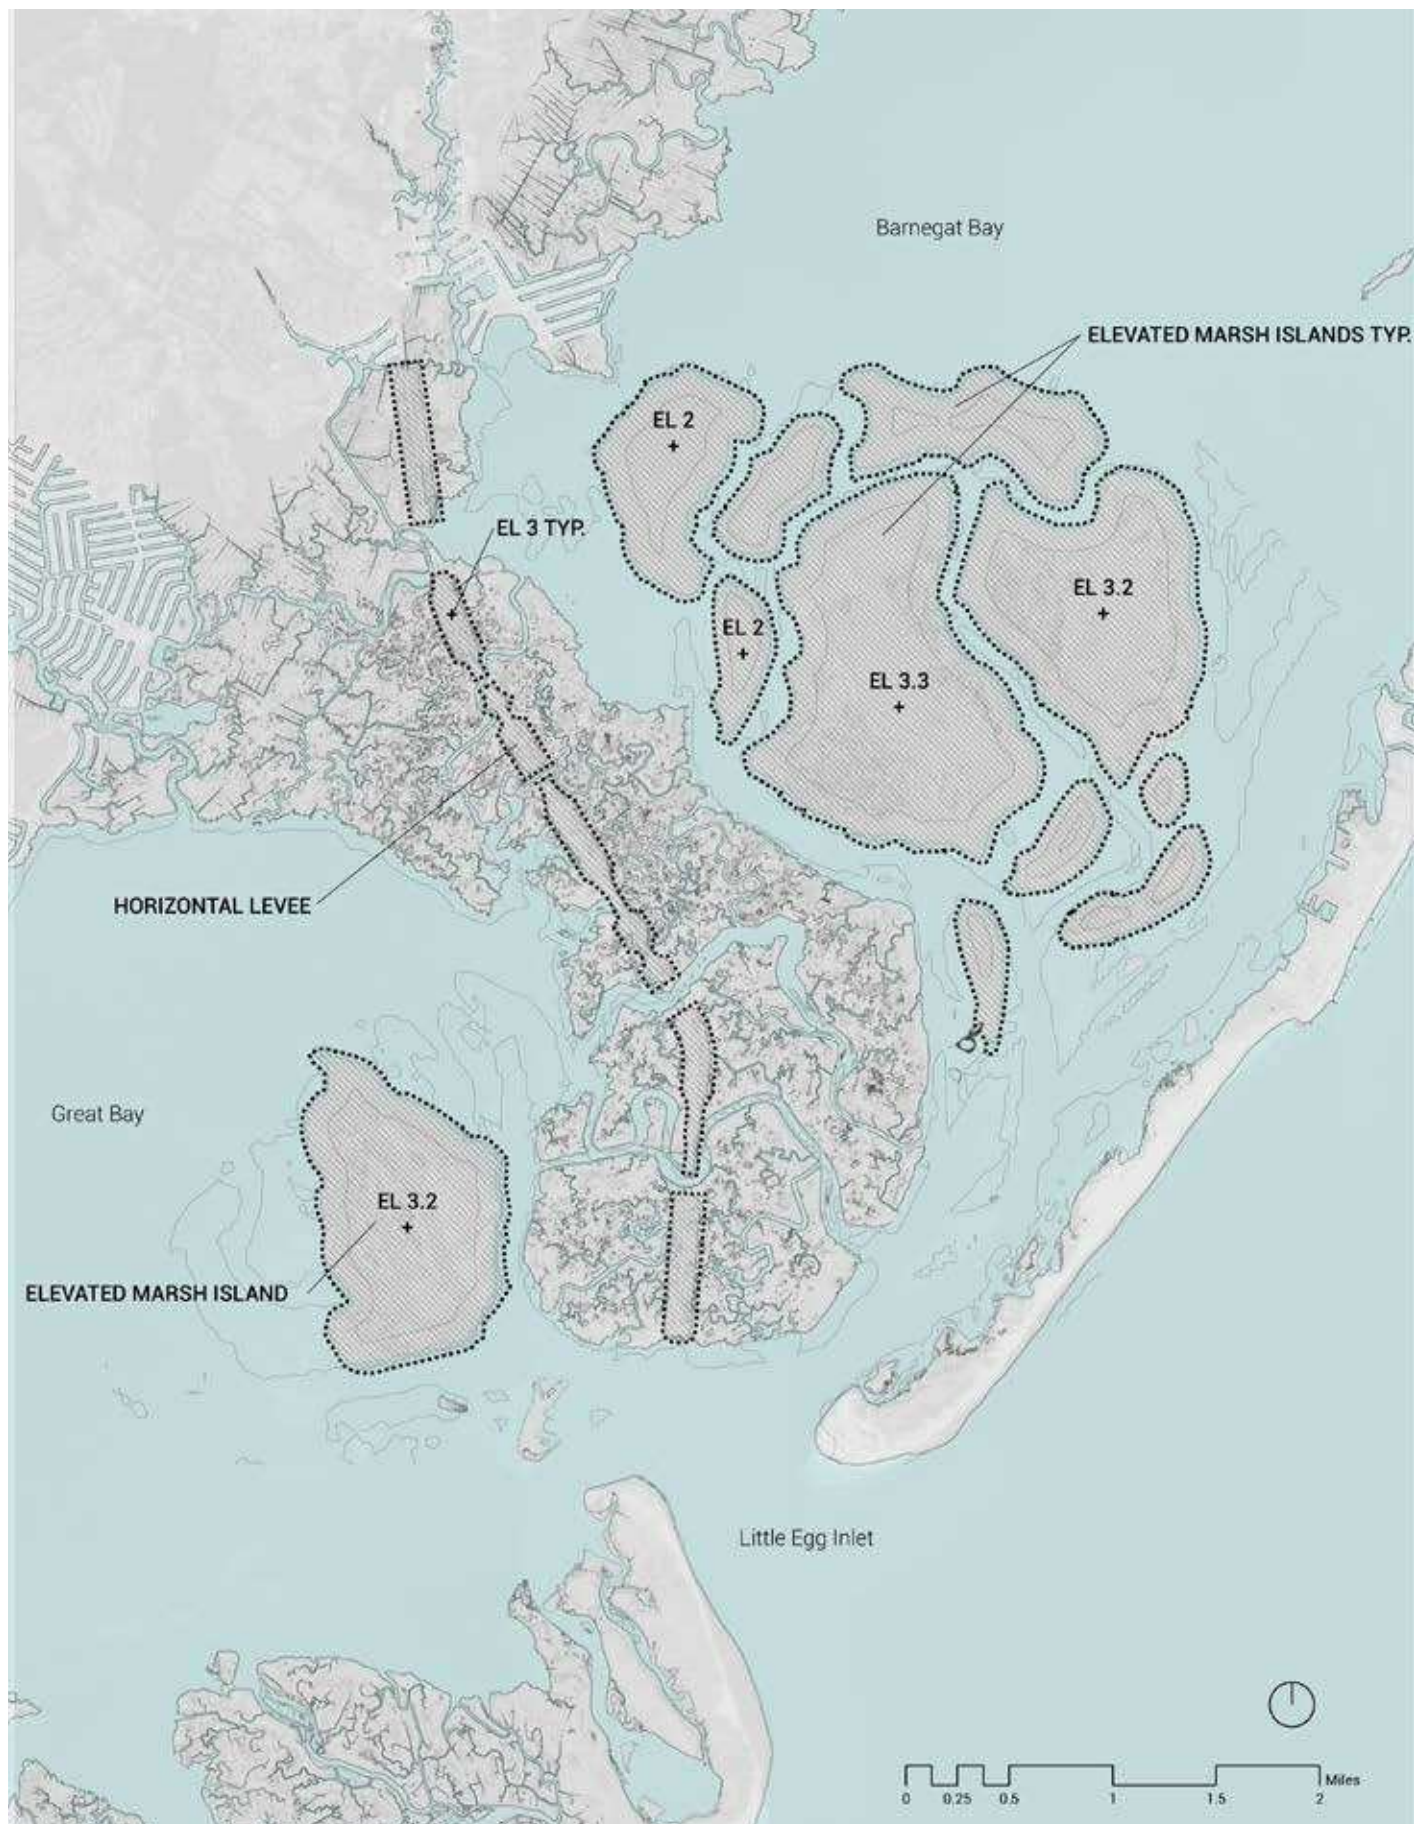


Holgate area as modeled in ERDC report




## NNBF PERFORMANCE AND SUITABILITY BRIGANTINE MODEL AREA


The Brigantine model area consists of an enhanced collection of elevated marsh islands between the Absecon and Little Egg Inlets. The images below and to the right were pulled from the ERDC report and were produced by the modeling team.

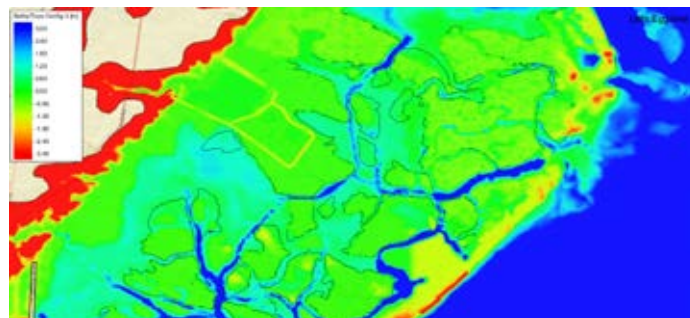

Brigantine Model Area Existing Elevations

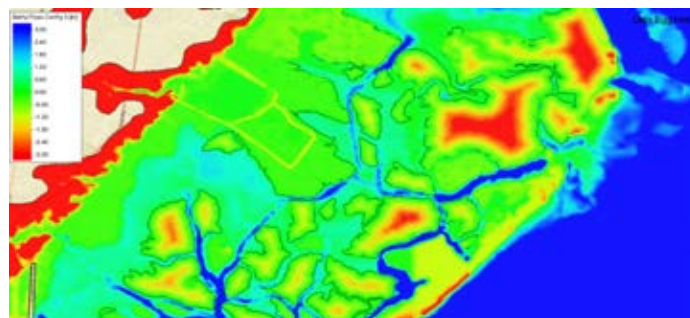

Brigantine Model Area Modeled Elevations

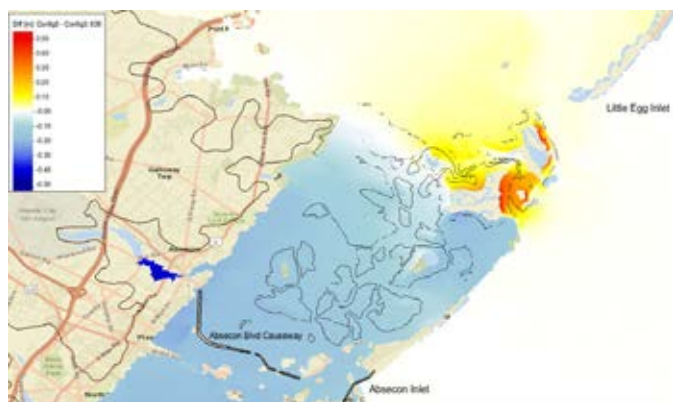

Water Surface Elevation Effect, Storm 350




Water Surface Elevation Effect, Storm 636



Footprints of Brigantine model features



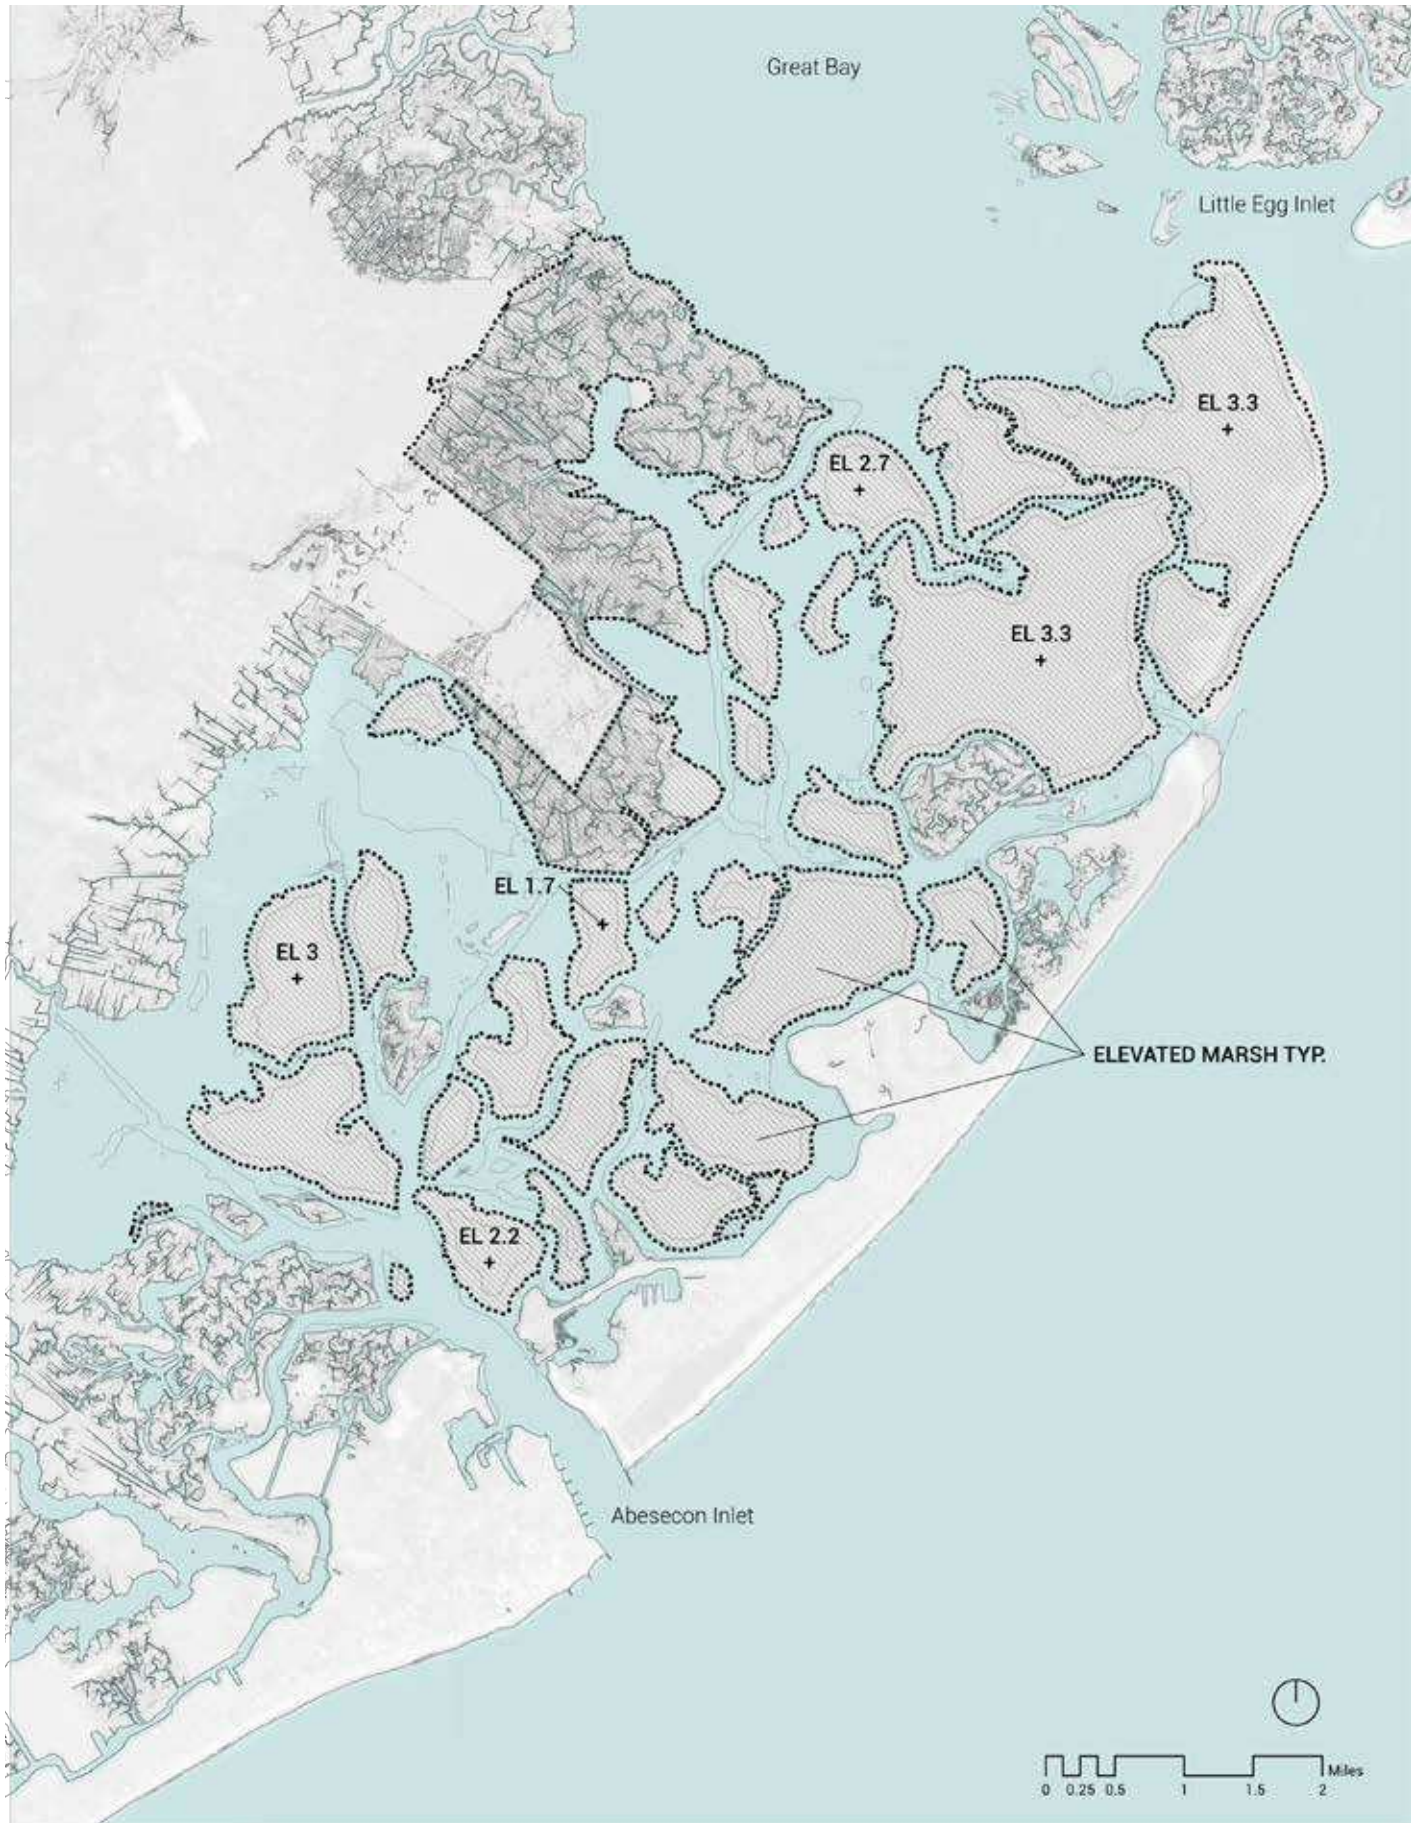


Brigantine area as modeled in ERDC report




## GREAT EGG MODEL AREA

The Great Egg model area consists of a collection of enhanced and elevated marsh islands that span across Great Egg Harbor Inlet. The images below and to the right were pulled from the ERDC report and were produced by the modeling team.

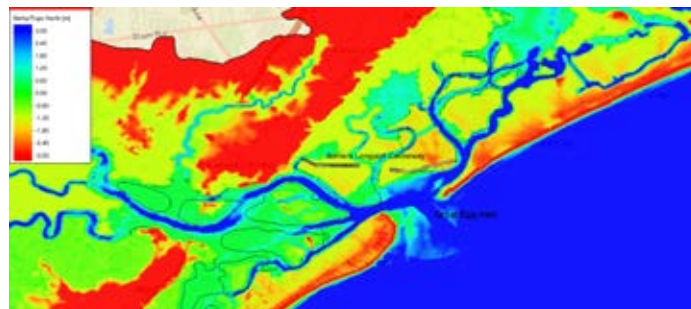

Great Egg Model Area Existing Elevations

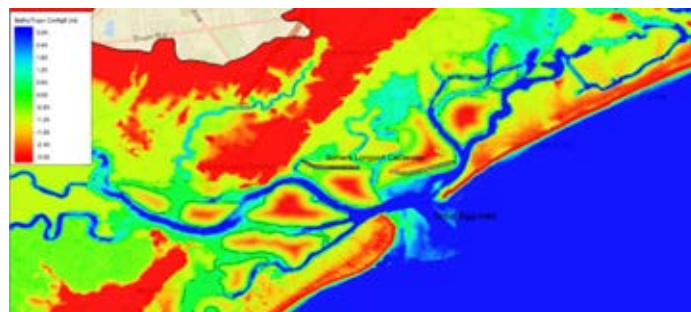


Great Egg Model Area Modeled Elevations




Water Surface Elevation Effect, Storm 350



Water Surface Elevation Effect, Storm 636

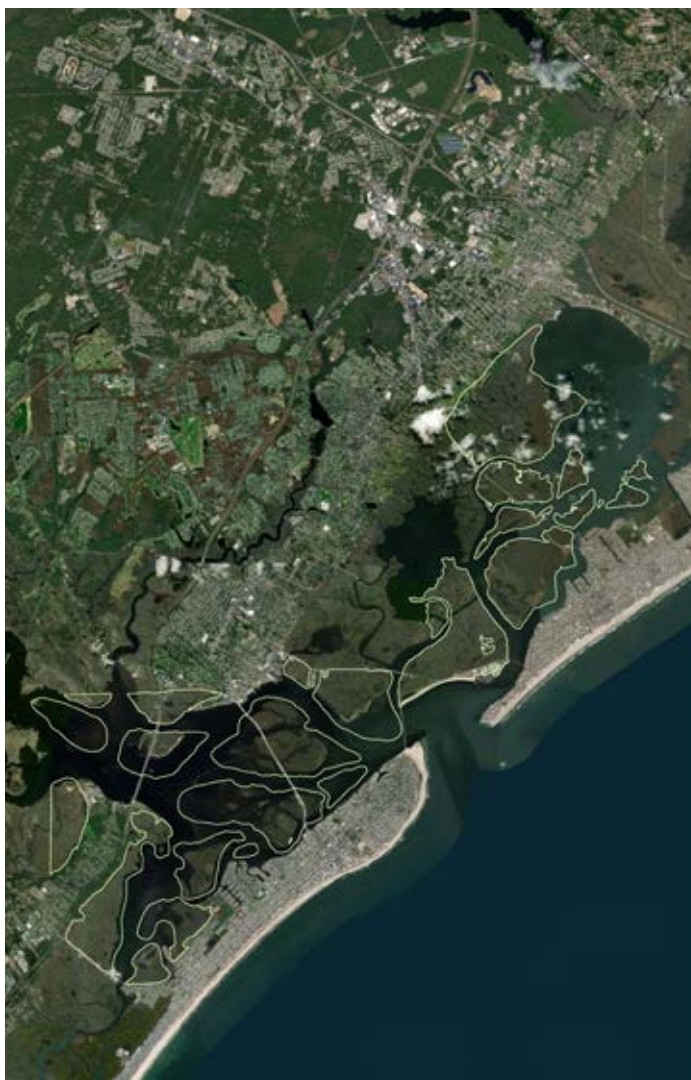

Footprints of Great Egg model features

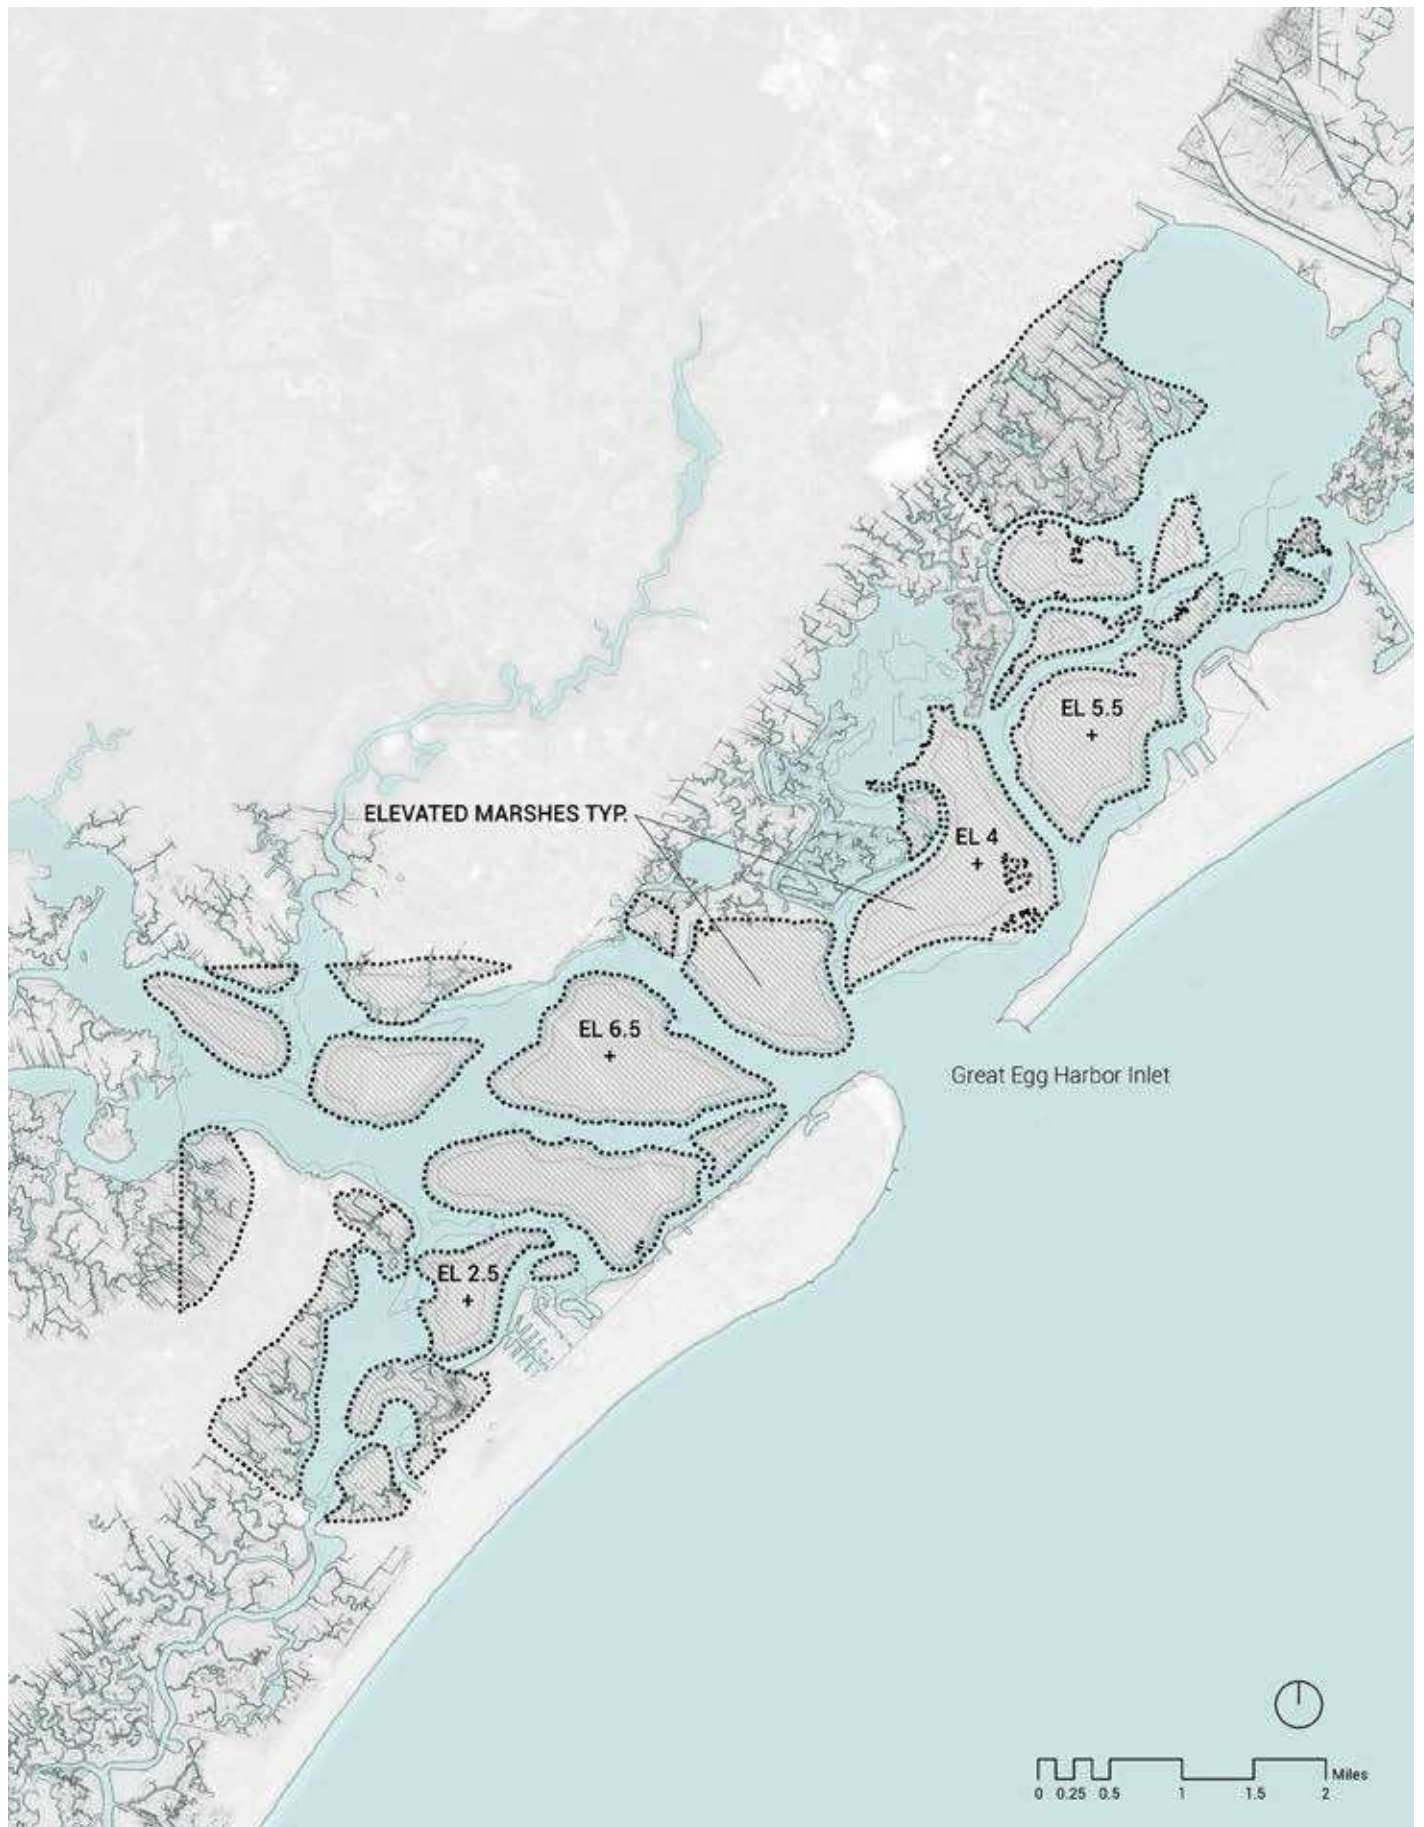

Great Egg area as modeled in ERDC report



## Interpretation of Results

From the modeling report, it is clear that the proposed NNBF do have significant effects on both storm surge and wave attenuation. However the results also demonstrate that not all effects are positive, as reductions in waves or storm surge in some locations are, at least under some storm scenarios, paired with increases in waves and surge in other locations. Additionally, different storm scenarios also prompted a wide range of effects from the various NNBF. Under at least some of the modeled conditions, features that would reduce storm surge in one location under one storm scenario were shown to increase storm surge under another storm scenario for the same location.

These are not surprising results, as any class of feature designed to reduce flooding or wave energy in one location has the potential to displace water to another location, depending on local circumstances. Consequently, this varied performance should not be interpreted as discrediting NNBF as CSRM strategies generally or in the Back Bays specifically.

Moreover, not only are the reductions in storm surges found in the modeling variable across the bays and highly sensitive to storm characteristics, the reductions obtained from the modeled features were, as delineated in the modeling report, not sufficient to provide the desired level of protection on their own, suggesting that NNBF should be studied in combination with other structural and non-structural measures.

Ultimately, these results do, as the modeling report concludes, demonstrate that further design and modeling work is necessary in order to fully evaluate large-scale NNBF in the Back Bays. This further work should begin from the recognition that the modeling results clearly indicate that the size, location and form of proposed NNBF have significant effects on their CSRM performance. An extended modeling and design process should allow for the exploration of feature extents and


configurations, aimed at maximizing the beneficial CSRM effects of the NNBF while minimizing the negative effects. Consequently, developing a system to design and test possible configurations will be necessary in order to complete a full study.

## A Proposed Process Forward

We would suggest that the NNBF modeling efforts to date should be seen as the first steps in such a system, where modeling methods would be iteratively integrated with the larger design process. In many cases this requires iterative design and multiple model runs in order to establish the most effective designs. A systematic process like this moves beyond a simple binary of “effective” or “ineffective” and instead aims at discovering what works best based relative to a set of agreed-upon and explicitly-articulated goals. One example for how this would work can be seen in the modeling report, where it notes that the features as currently proposed for Great Egg Harbor “cause some surge amplification near the inlet mouth”, which is relatively heavily developed, but that “reconfiguration and changes in the height of the features may allow this unavoidable amplification to be localized to well-protected or undeveloped areas”. Modeling provides information about how a design performs; this suggests alternative configurations, which must then in turn be tested to understand their performance. Multiply this process of feedback between design and model across multiple bays and multiple iterations and the scope of the integrated process necessary to hone in on the most effective configurations starts to become clear.


The diagram at right is a simple schematic illustrating a possible working method. It outlines a process where the iterative exploration of alternatives and the explicit assessment of values (highlighted in orange) can be linked within an integrated design-and-modeling process in order to develop effective outcomes that span the widest possible range of benefits. It would build off the efforts already completed by the modeling team (shown in gray)

## PROPOSED DESIGN + MODELING METHOD

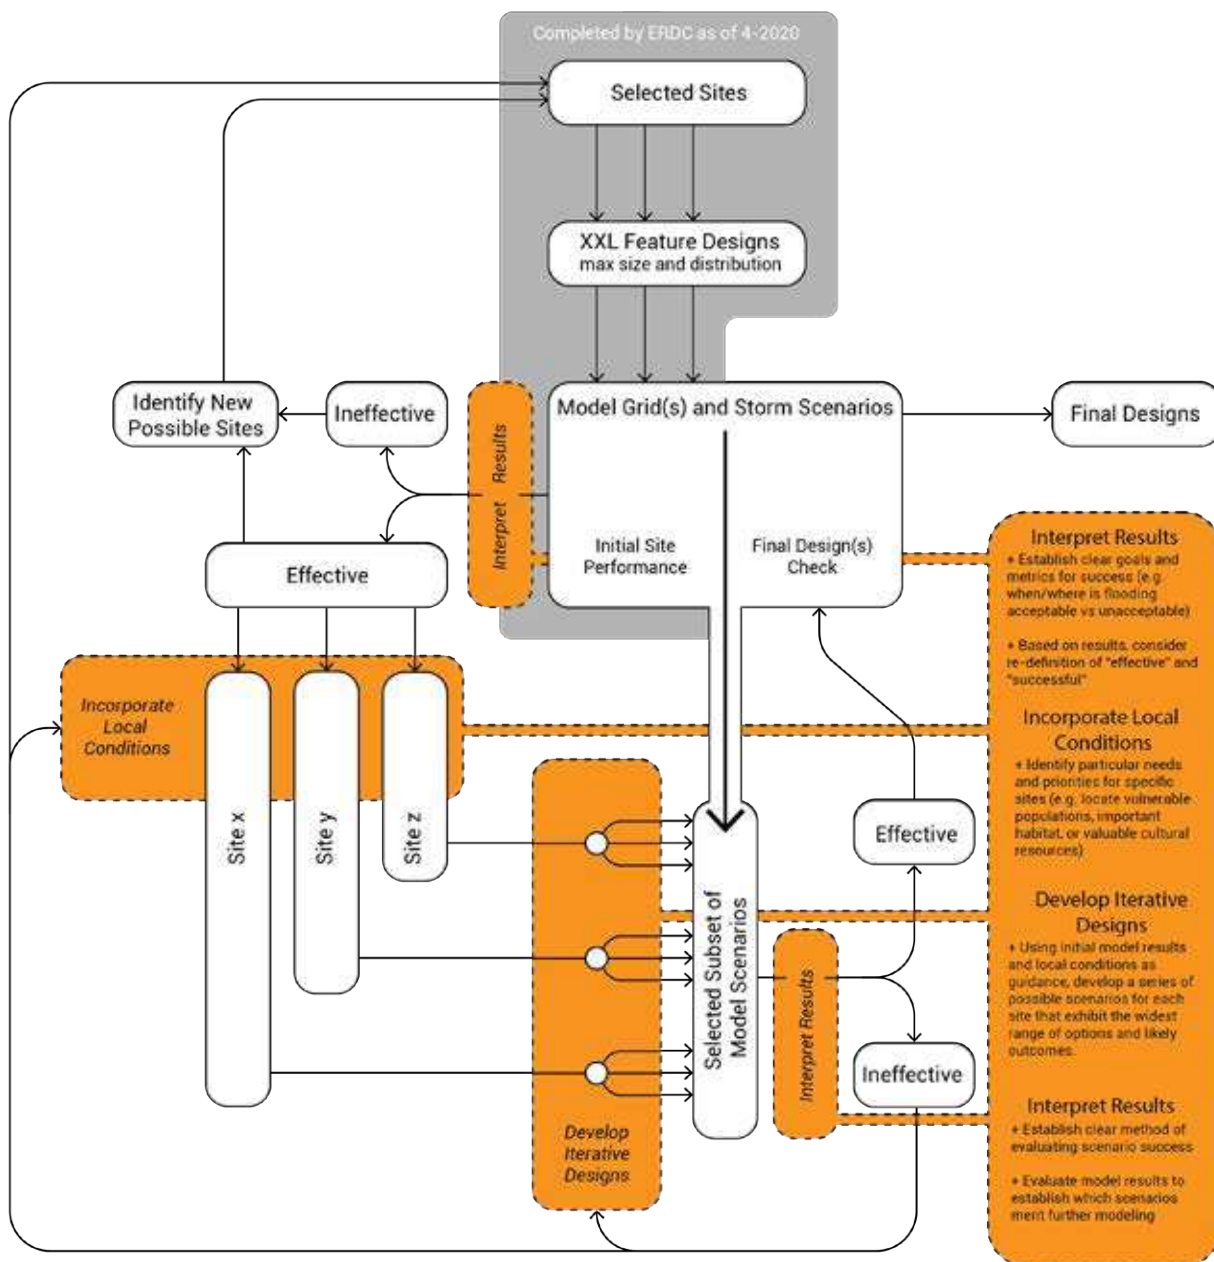

and use the established modeling grids and storm scenarios. Because models take considerable time to both set up and run, effort should be placed on the selection of the most essential subset of conditions under which to test different iterations before running them through the full gamut of scenarios that has been established. Iterative exploration also generates more “loops” within the larger process,

allowing for results to feed back into upper levels of the process to reconsider starting assumptions and facilitate iteration which, ideally, grows increasingly intelligent in each “loop” through the integrated process. (Note that, in the diagram above, this reconsideration primarily happens in the “interpret results” step. This step (in orange) is shown as only partially overlapping with the modeling team work-

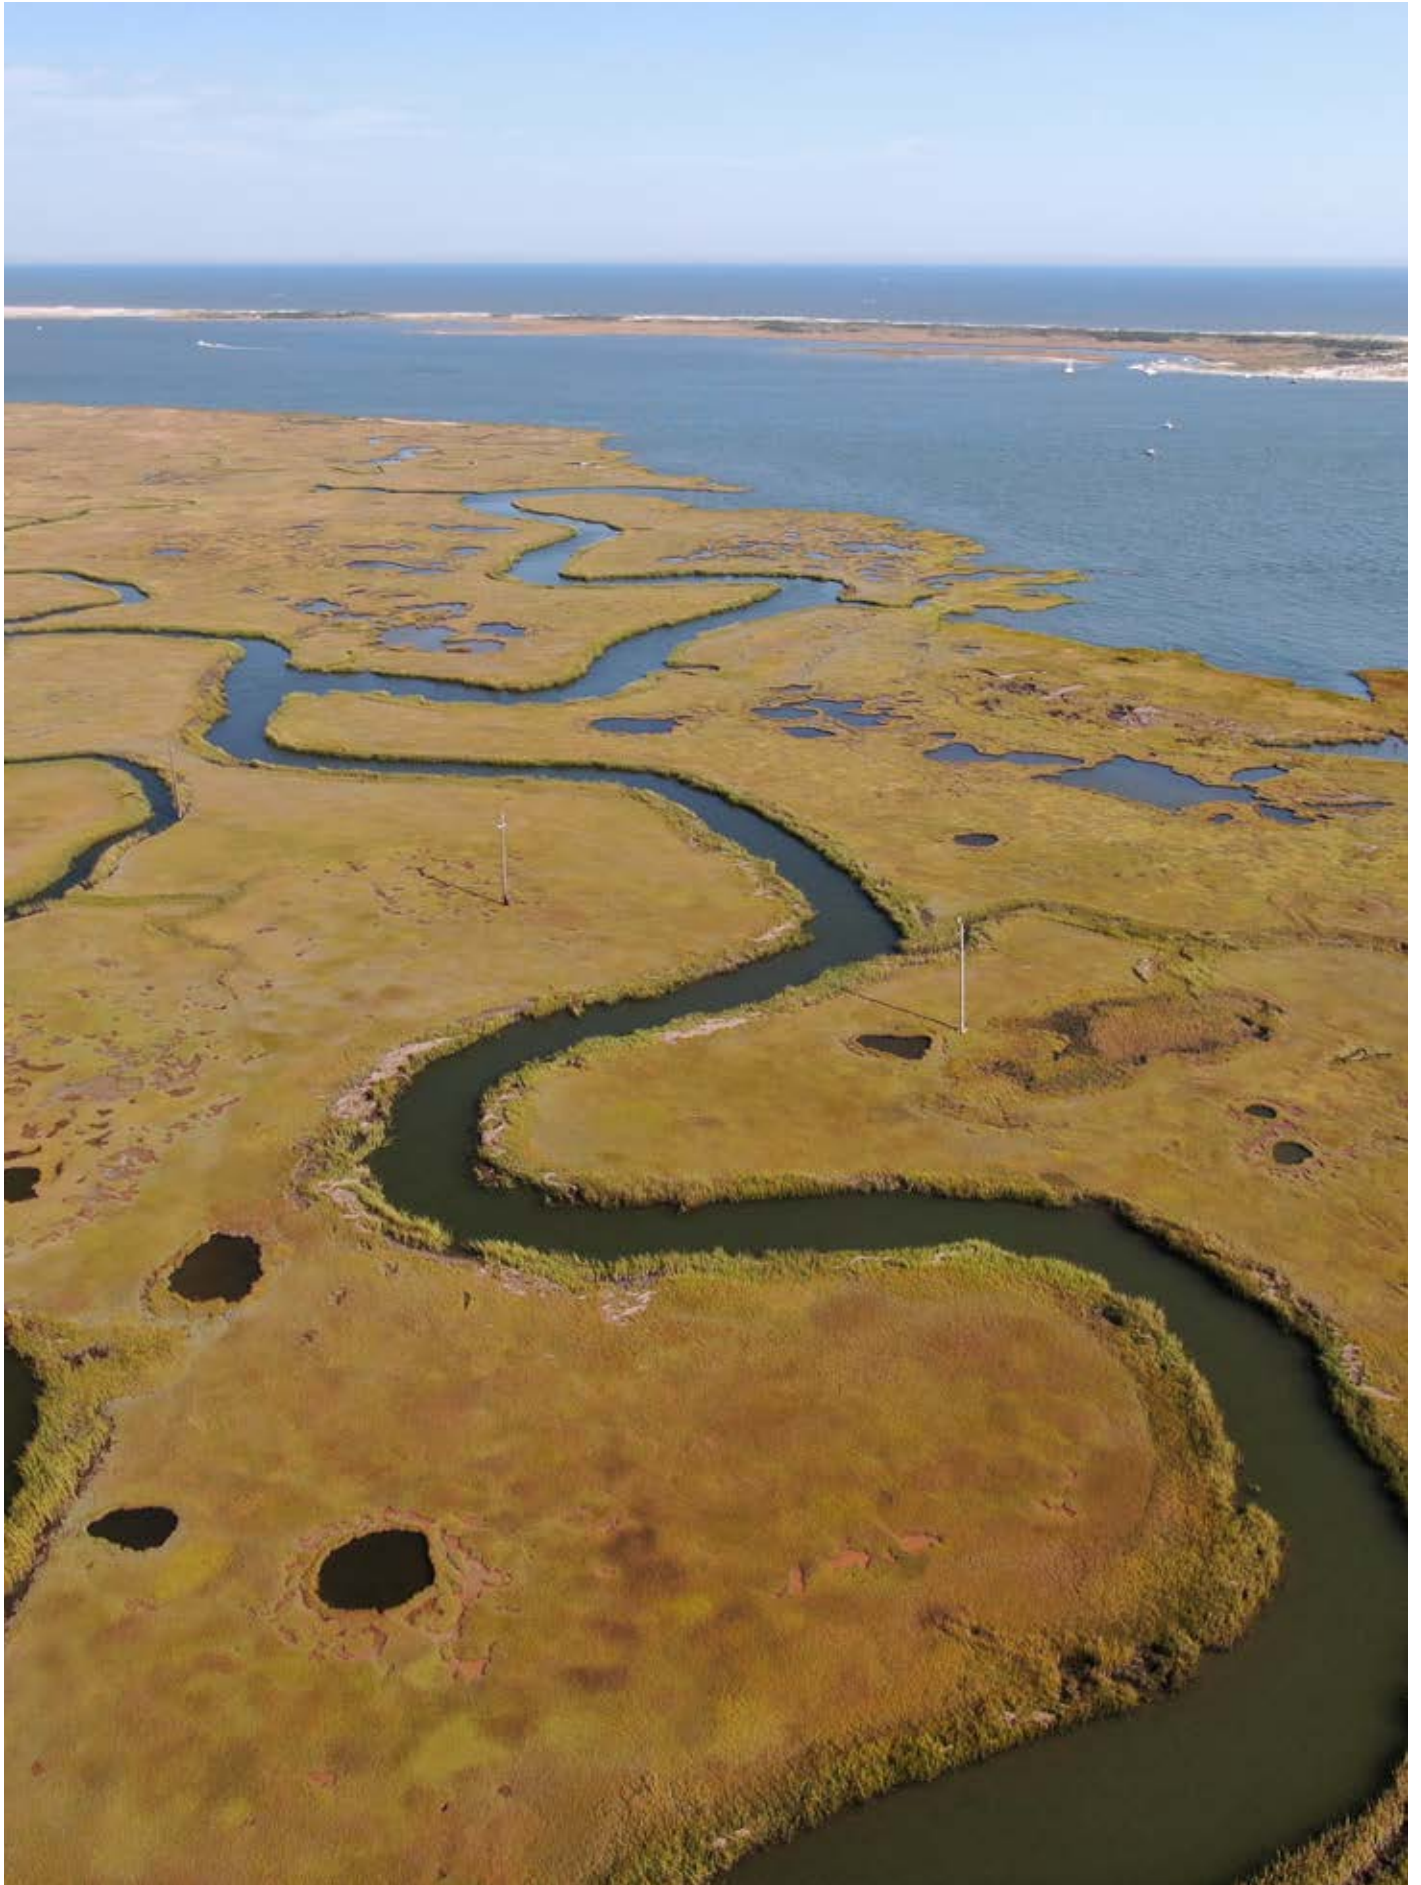




to-date (in gray), because, while the modeling has provided interpretation of results according their established scope, that scope did not include the tasks of determining whether the proposed features are effective or setting the criteria by which that effectiveness would be determined.)

In order to do this successfully, it is also necessary to clearly describe the value judgements that underlie both the model development itself and the assessments of the results. Returning to the example of the discussion of Great Egg Harbor may help clarify the role of value judgments in assessing model results. Modeling permits determining whether the proposed features increase or decrease surge in a given location, such as near the inlet mouth. In this localized fashion, modeling can be said to show whether the features are “effective” or “ineffective” for a bounded geography. However, modeling does not in and of itself determine whether it is more desirable to focus surge decreases around the inlet mouth or in some other location. That question, of what effects are desirable where, is ultimately what permits decisions to be made about whether a design is, as a whole, “effective” or “ineffective”. Economic models can be one key input for this, feeding into the assessment of results by informing the goals that are set at each “loop” through the design-and-modeling process. Ideally, though, this process of assessment would be transparent, open-ended, and iterative, enabling criteria of effectiveness and ineffectiveness to be informed by what is learned through each step of an integrated design-and-modeling process.

## **Conclusion**

Both model results and their interpretation are governed by sets of starting assumptions and, unfortunately, in many cases these assumptions are inaccurate or fail to take into consideration the compounding complexity of the natural world. It is also relatively easy to establish models that can clearly prove or disprove the success of any given design by adjusting the starting assumptions or the value system used to evaluate the results. We

as a team are excited about the honesty in the ambiguity and range of the results generated by the ERDC modeling effort, as they point the way past these potential pitfalls. In our reading, the results demonstrate both the clear potential of NNBF as CSRM features and a need to test, design, and model a wide range of scenarios in order to capture the full potential of NNBF for CSRM in the New Jersey Back Bays.

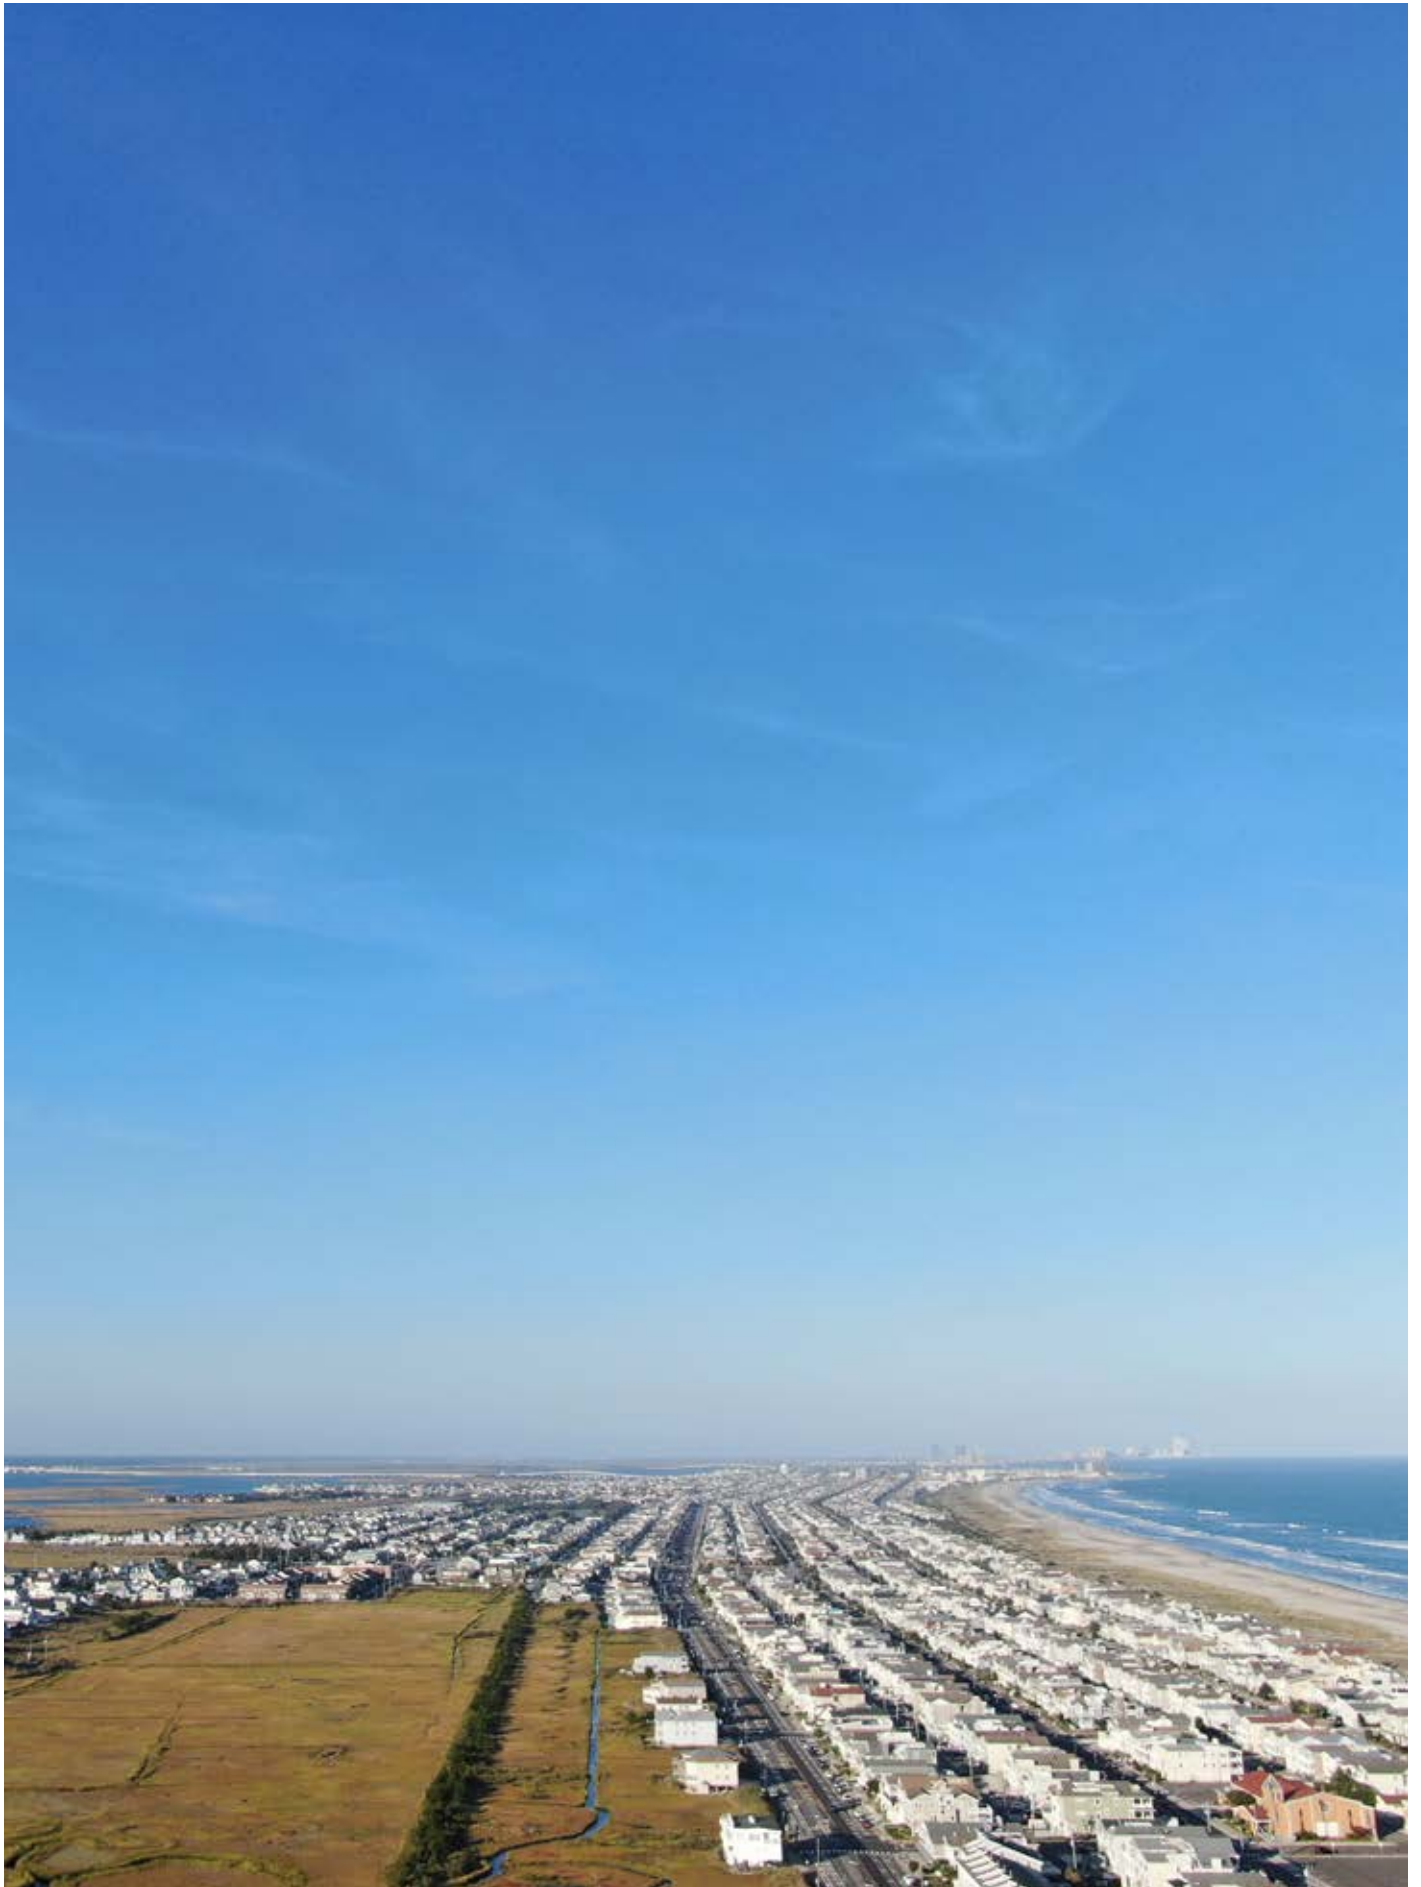

# Part IV

## PAIRING NONSTRUCTURAL MEASURES WITH NNBF

This section of the report focuses on opportunities for linking nonstructural measures with NNBF to increase CSRM benefits and ecological value. Current nonstructural elements identified in the New Jersey Back Bays Coastal Storm Risk Management Interim Feasibility Study and Environmental Scoping Document: Main Report (USACE 2019) focus on building retrofits to residential structures by elevation. With further data and analysis, future recommendations for nonstructural measures in the New Jersey Back Bays may expand in scope and scale. In the Interim Feasibility Study, possible nonstructural measures are broadly identified within four categories: (1) managed coastal retreat (often facilitated by acquisition and/or relocation); (2) building retrofit (flood proofing, elevations, and ring levees); (3) land use management (zoning changes and undeveloped land preservation); and (4) early flood warnings (evacuation planning and emergency response systems). Within these categories, NNBF has the potential to increase CSRM benefits to buildings receiving retrofits, replace areas where buildings have been acquired and relocated that might offer CSRM benefits to adjacent areas, and establish larger interconnected NNBF through zoning changes and undeveloped land preservation that would support efforts to increase ecosystem resiliency and marsh migration with SLR.

In order to begin thinking through the potential benefits of linking nonstructural measures with NNBF, four community types were identified throughout the Back Bays based on their ecological context and physical urban form. Each of the four community types was then diagrammatically drawn to illustrate basic features that tend to appear throughout these communities. These “hypothetical communities” are arranged in this section of the report according to their location within the Bay from seaward to bayward, the Atlantic Ocean to upland. A range of nonstructural and NNBF strategies are diagrammatically illustrated according to potential applications along the cross-section of each community type.

To evaluate the potential of combined nonstructural and NNBF measures (particularly managed retreat) in specific locations and communities within the Back Bays, in-depth data collection, analysis, and public engagement is necessary. The examples shown in this report do not address the range of vulnerabilities and inequities that particular communities currently experience or that might emerge with the implementation of these strategies, but it is important to do so through further study.




## TYPICAL PHYSICAL NONSTRUCTURAL MEASURES

The following measures are based on current nonstructural measures for building retrofits as well as acquisition and relocation deployed by the USACE. Each drawing shows a hypothetical apartment building, similar in structure and scale to buildings found in Back Bay communities, in an

abstracted context. There are no spatial diagrams in this report for non-physical measures, such as emergency response systems. Refer to the National Nonstructural Committee's Nonstructural Flood Risk Management Matrix for further information on the suitability of these measures to varying circumstances.


### [BASE STRUCTURE]

The following diagrams are drawn to reflect nonstructural measures for this hypothetical apartment building.

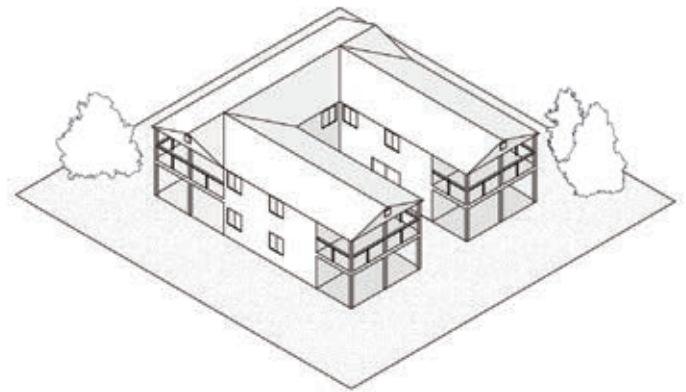


### DRY FLOOD-PROOFING

Dry-flood proofing protects the building up to a certain elevation with flood shields and a protective membrane.

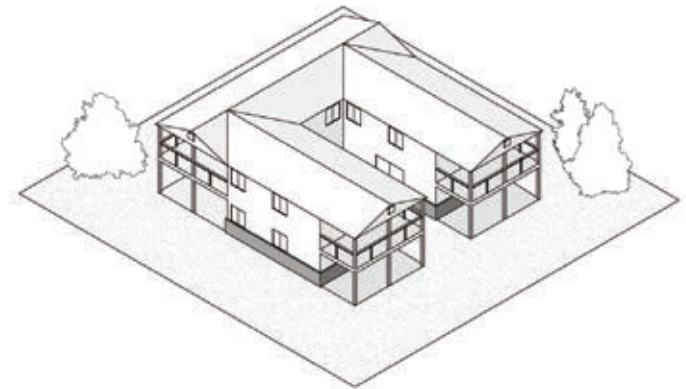


### WET FLOOD-PROOFING

Wet-flood proofing allows the building to take on floodwater without sustaining major damages or compromising the integrity of the structure. In a flood event, the first floor would be evacuated and water would flow through.

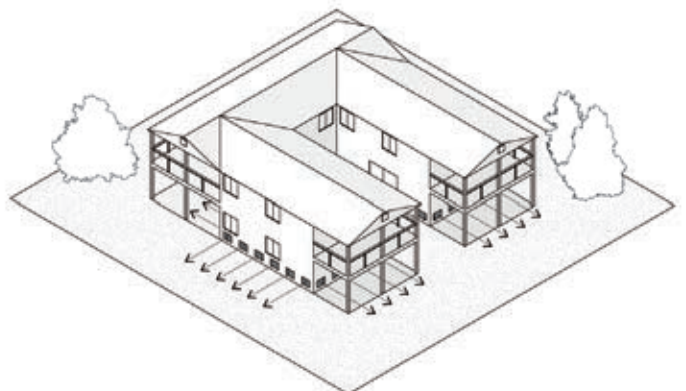


## ELEVATION

Elevating the building to a particular height allows floodwater to pass underneath the structure without damaging the structure or needing to evacuate a ground floor.

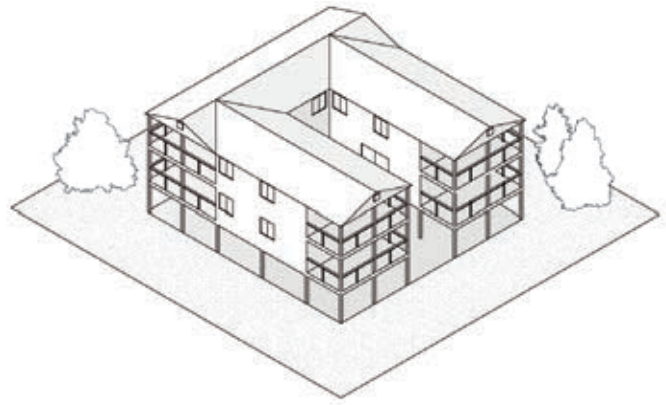


## ACQUISITION

Acquisition is a process of purchasing a property that is at continued and unpreventable risk. This is accompanied by changing the land use of that property to prevent future settlement in hazardous areas.

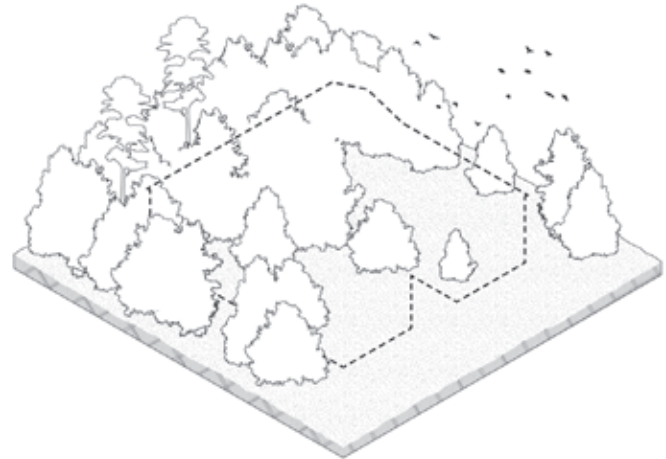

## RELOCATION

Relocation physically removes a building from a hazardous area and places it on a non-hazardous property. Similarly, the land use of the initial property is changed to prevent future settlement in hazardous areas.

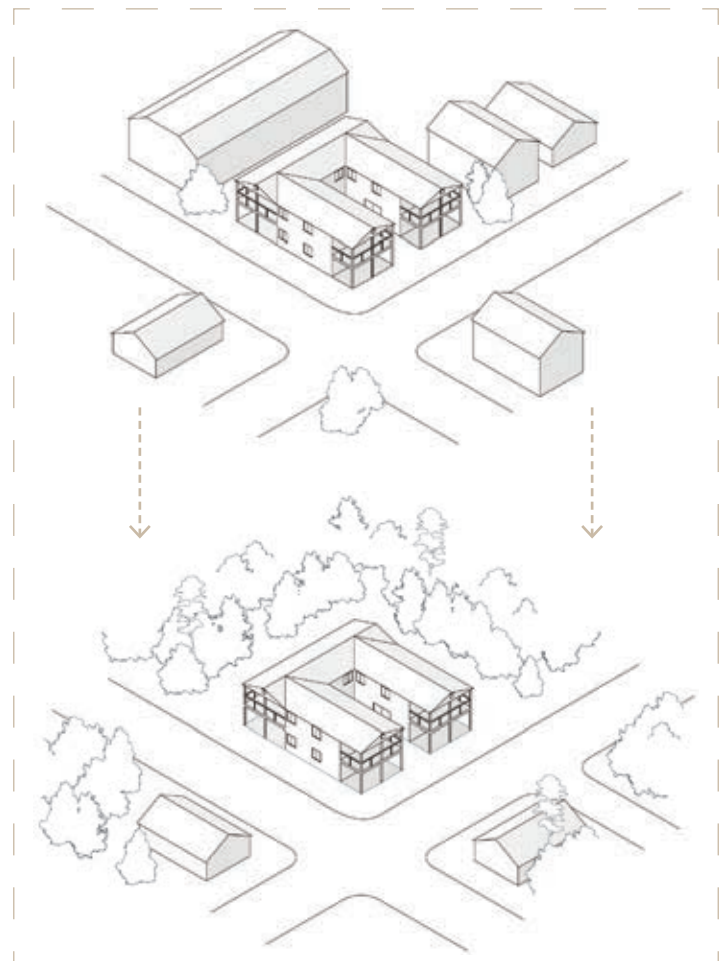

# BACK BAY COMMUNITY TYPOLOGIES


Four types of Back Bay communities were identified to structure this study of the potential benefits of combining nonstructural measures with NNBF. This approach suggests that the application of nonstructural measures be considered in relation to their ecological contexts and the CSRM benefits those contexts are able to provide. It also suggests important adjacencies throughout the bay, as alterations to one area have the potential to affect the ecological and hydrological dynamics of neighbouring areas.

This map (at right) identifies footprints for barrier island communities, marsh island communities, lagoon communities, and bay communities throughout the New Jersey Back Bays. Frames indicated with black dotted lines indicate examples of these communities that are shown in maps on subsequent pages of this report. For each of the four community types, the maps depicting these example communities are followed by sections and diagrams that use drawings of hypothetical communities to illustrate the potential combination of nonstructural measures and NNBF in that community type.

While the boundaries drawn here do not reflect the social, economic, jurisdictional, or infrastructural relations that constitute, create, and maintain community, they should be read in context of an understanding of the importance of community and social resilience to CSRM and the need to consider the specifics circumstances of individual communities in the planning and implementation of nonstructural measures, particularly when they are paired with NNBF.

**Legend**

- Bay Community Type
- Lagoon Community Type
- Marsh Island Community Type
- Barrier Island Community Type
- NJIWW








LAGOON  
COMMUNITY  
EXAMPLE


BARRIER ISLAND  
COMMUNITY  
EXAMPLE

MARSH ISLAND  
COMMUNITY  
EXAMPLE

BAY  
COMMUNITY  
EXAMPLE

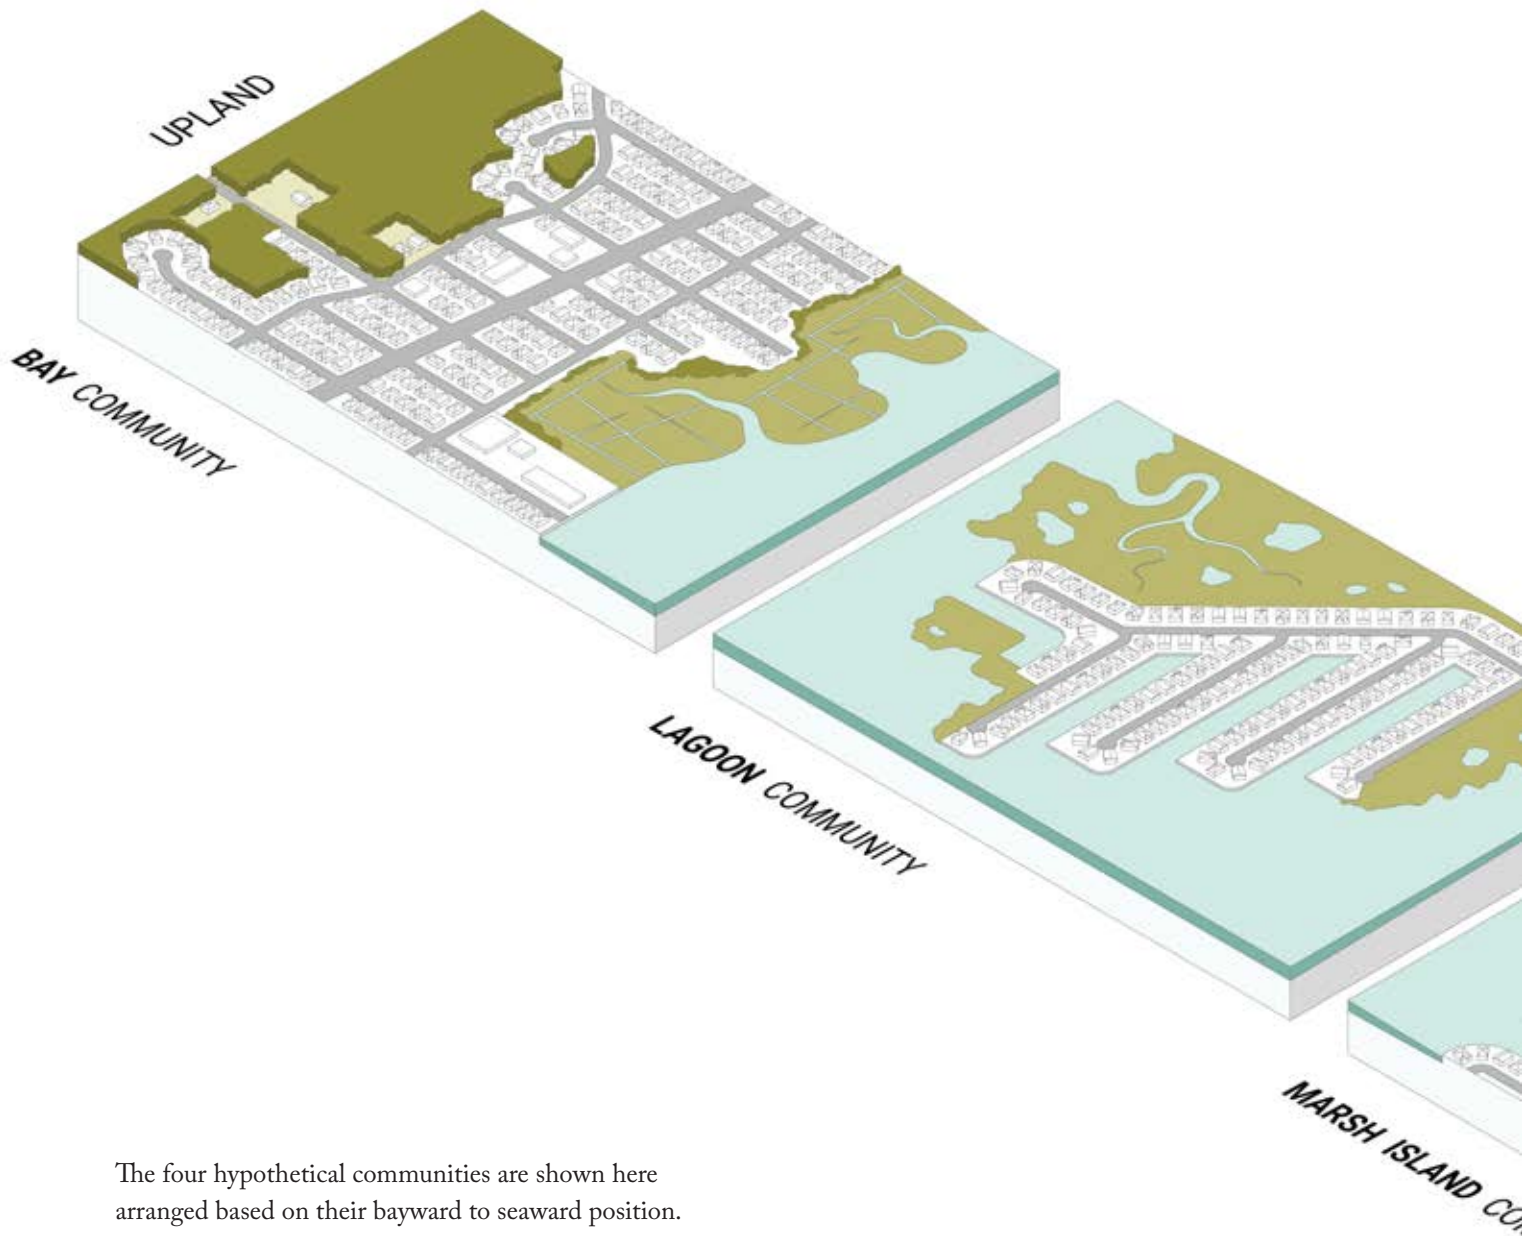

The four hypothetical communities are shown here arranged based on their bayward to seaward position. Each of the hypothetical communities is drawn in more detail on the coming pages, where they are shown in combination with potentially applicable nonstructural measures and NNBF. From these parts, a full cross-section of nonstructural measures and NNBF combinations can be stitched together that reflects possible beneficial relationships between the hypothetical communities within the larger back bay system.

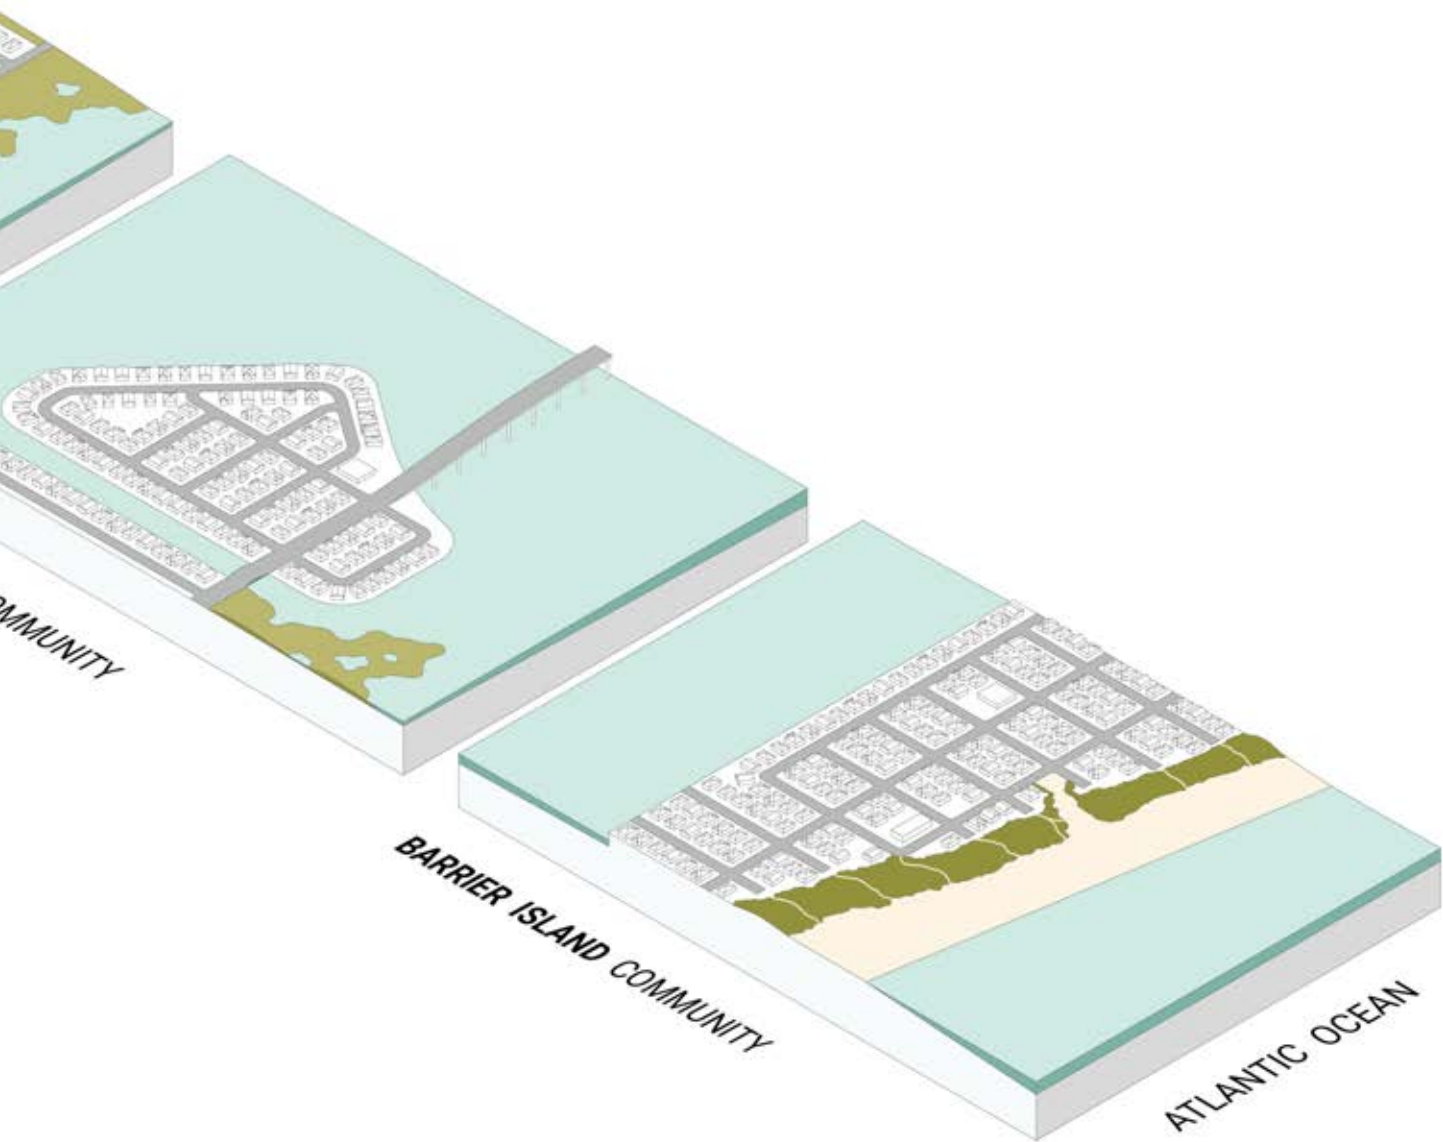








## BARRIER ISLAND COMMUNITIES


These communities sit on the outermost perimeter of the bays and are the furthest away from mainland New Jersey. Barrier islands are surrounded by water on all sides. Inlets occasionally cut through the islands, facilitating tidal exchange and forming entry points for navigation channels. Access to these communities is often limited and requires crossing over large bodies of water and navigation routes by way of a highway extension or bridge. In terms of urban form, barrier island communities are typically very dense, with small clusters of homes, commercial structures, and apartment buildings along gridded roads which extend seaward to bayard. The seaward side of the island is characterized by a beach and dune system. These communities have significant storm risk on the seaward edge along their length (though seaward CSRM lies outside the scope of this study) as well as storm surge waters that enter inlets from the bayward side.

The community represented on this map is an example of the many identified barrier island communities throughout the Back Bay system.

### Legend

-  Barrier Island Community Type
-  Wetland
-  NJIWW
-  Major Road




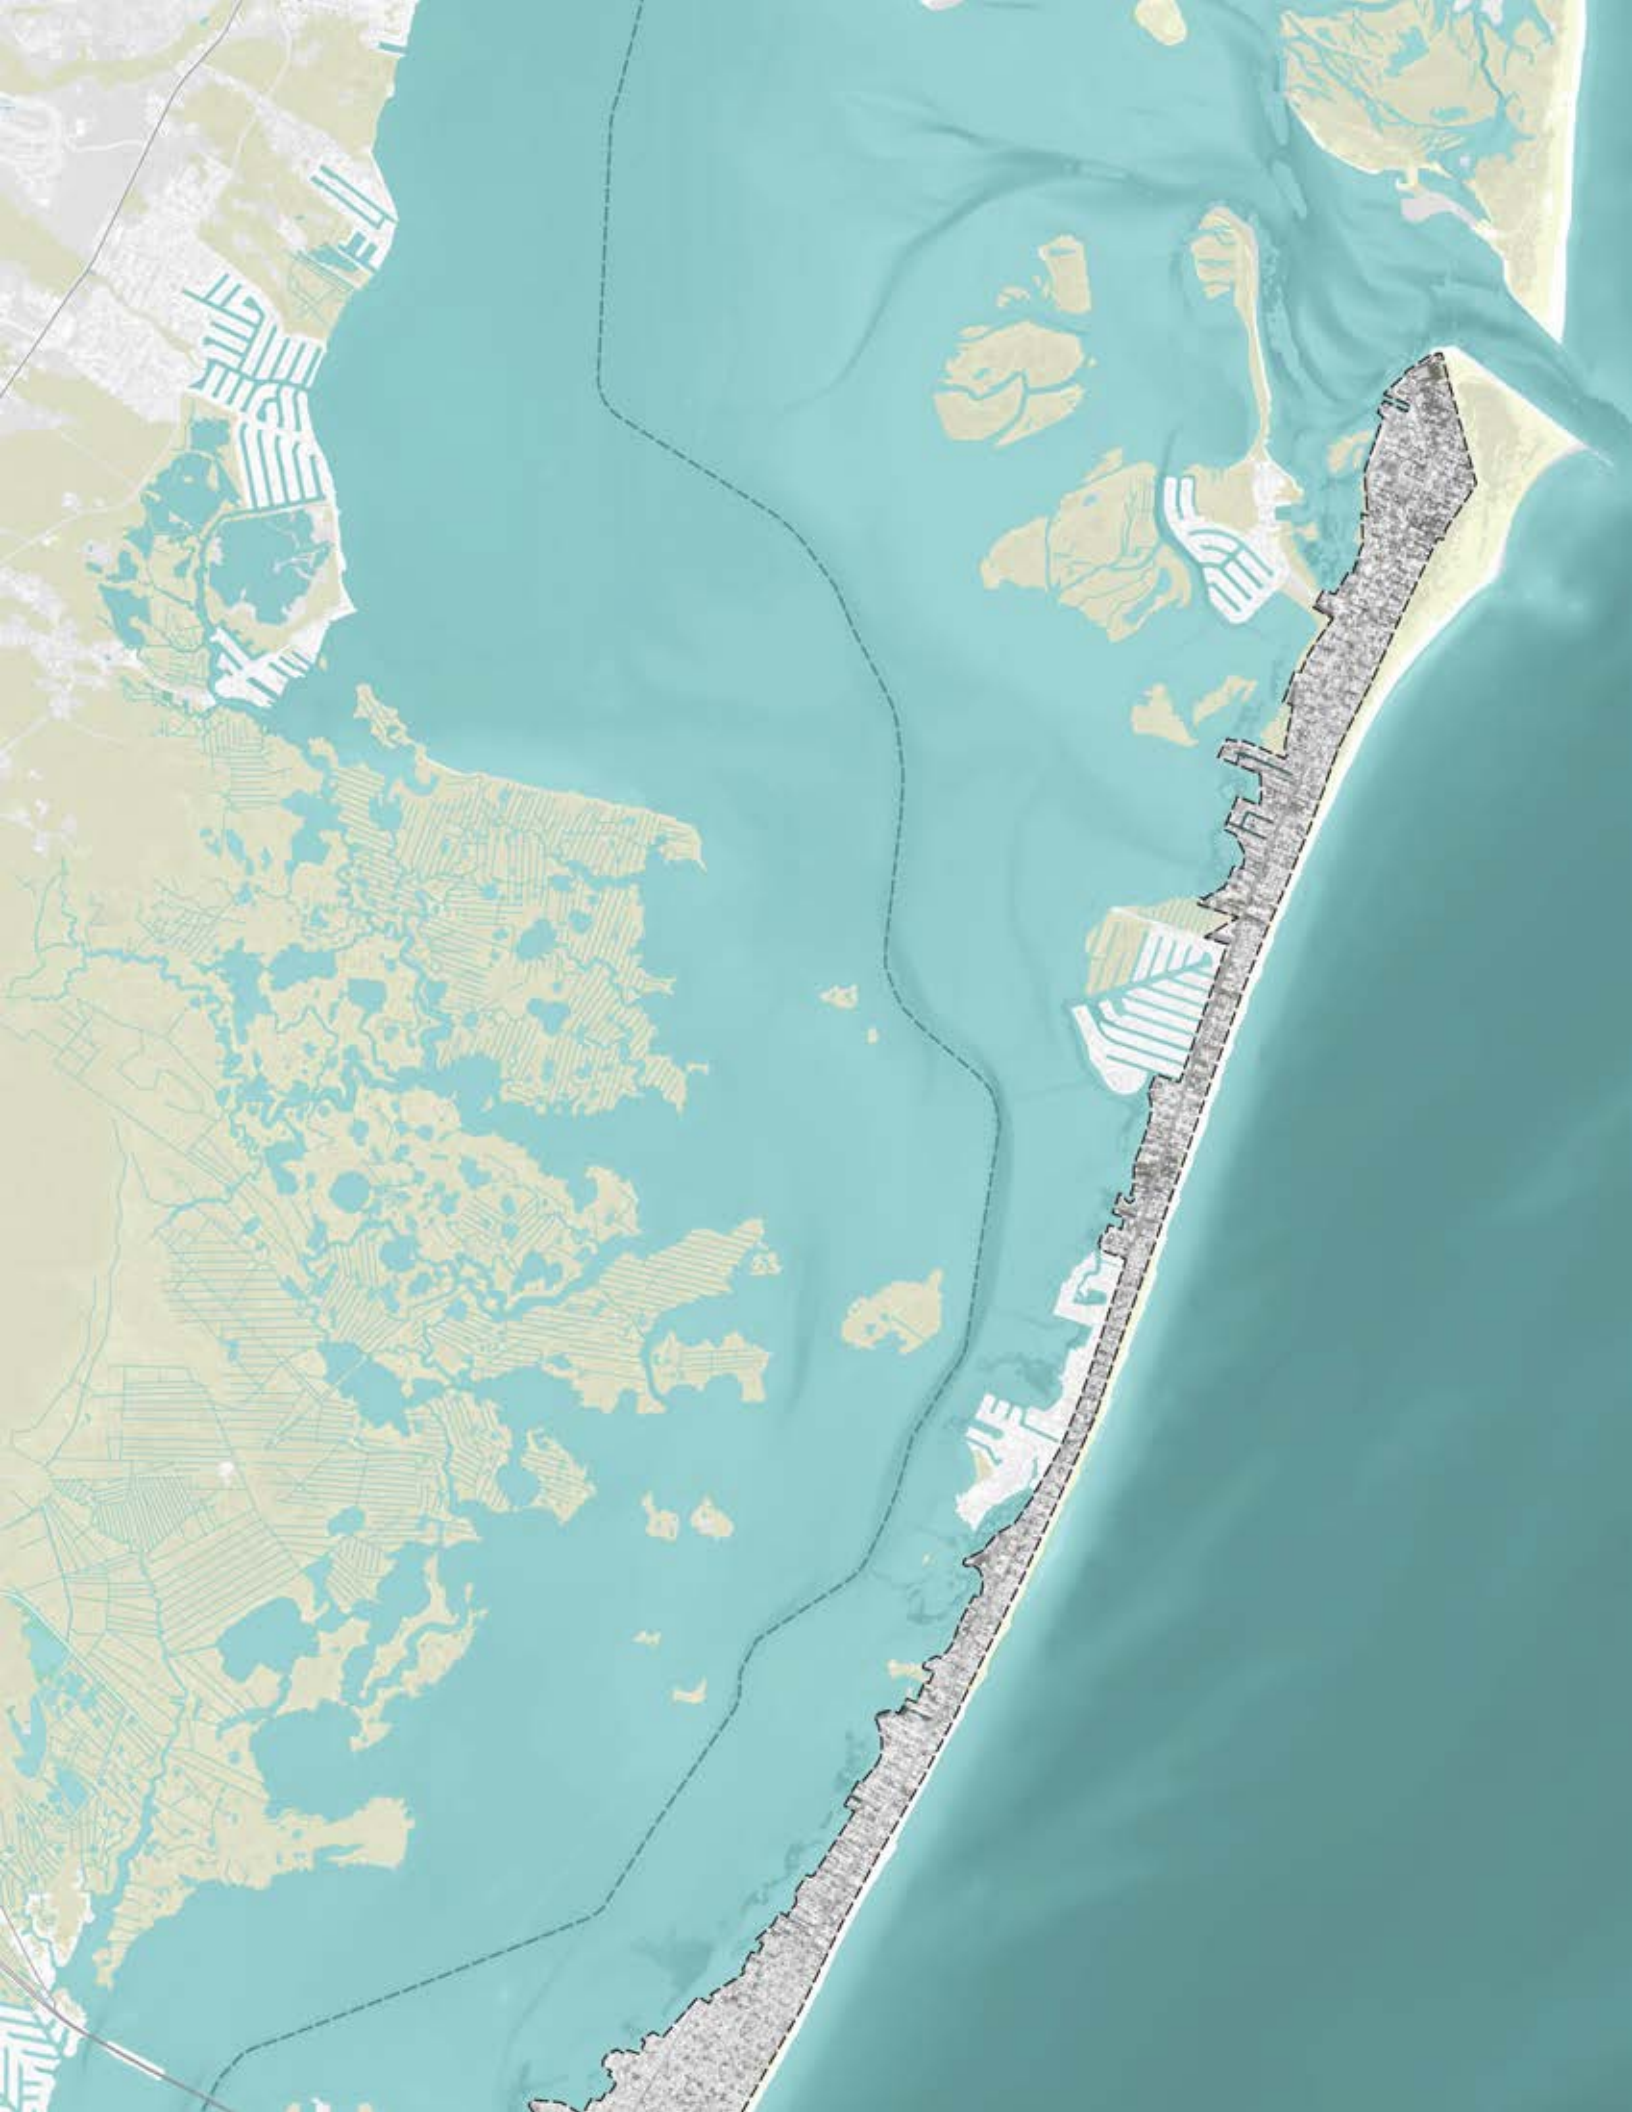

## BARRIER ISLAND COMMUNITY: NONSTRUCTURAL WITH NNBF

The potential of NNBF to provide CSRM benefits in combination with nonstructural measures can be considered on both the seaward and bayward sides of barrier island communities. (It should be noted that seaward CSRM lies outside the scope of the larger NJBB study, but ideally nonstructural measures would be paired with NNBF in a holistic fashion for a given community, and so seaward pairings are

included here.) On the seaward side, enhanced dune systems paired with building retrofits and expanded dune systems with additional area allocated from acquisition/relocation can be considered. On the bayward side, improved and created marshes and SAV areas, living breakwaters, and ecotone levees can be considered to reduce storm surge energy and wave height.

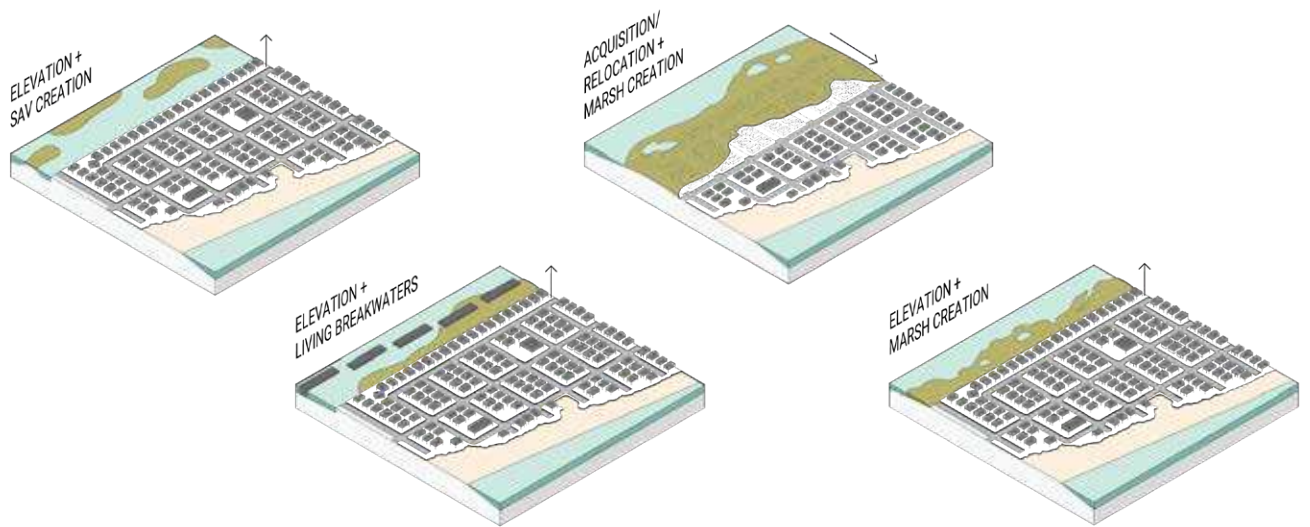


Marsh Restoration / Creation

Elevation / Flood-proofing




Living Breakwaters / SAV

Acquisition / Relocation

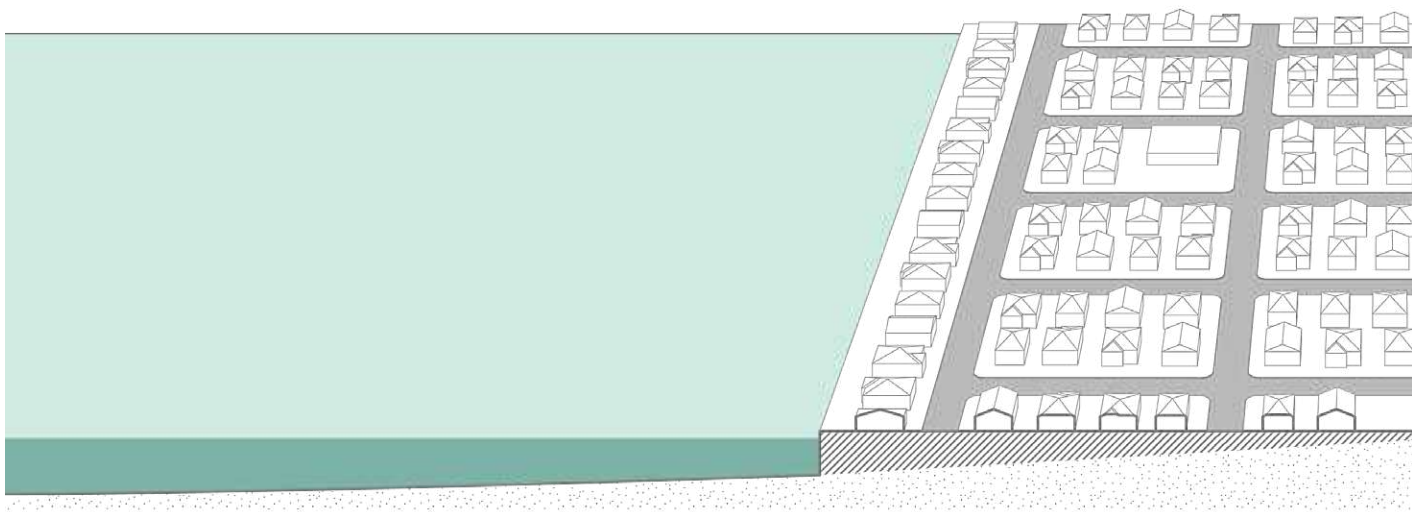


Diagrammatic section perspective of a hypothetical barrier island community



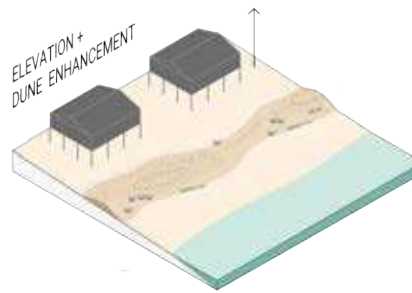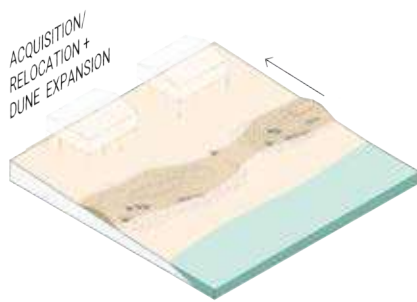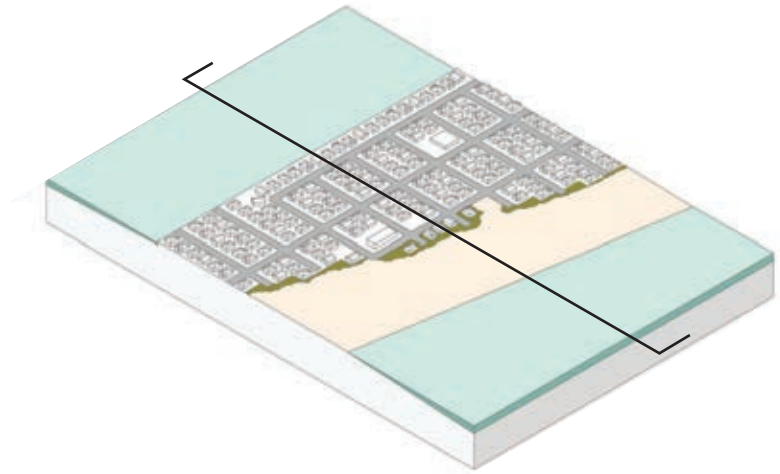

Dune Expansion

Dune Enhancement

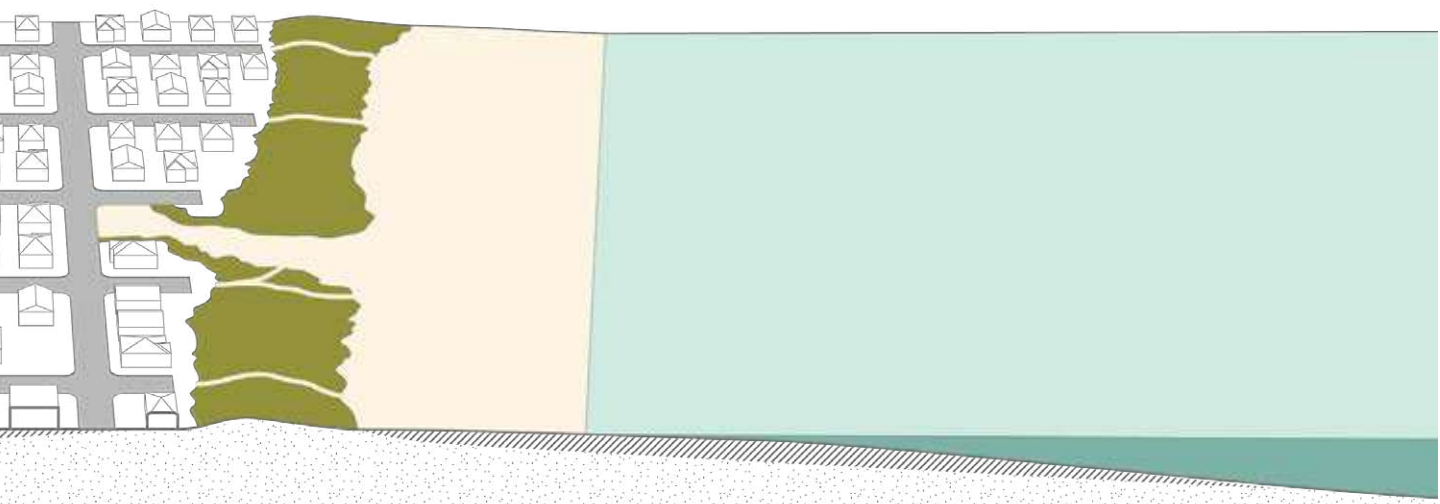

## MARSH ISLAND COMMUNITIES

Marsh Island communities are located within the bays and are surrounded by water on all sides. Marsh Island communities are often smaller and segmented in comparison to long and continuous barrier island communities. These communities sit within the interior of the bays, replacing and often adjacent to intact marsh islands. These communities are the least prevalent of the four coastal community types identified in this report. Because of their size and separation from the east and west landforms of the bays, Marsh Island communities are accessible primarily by one or two roads or bridges. Similar to Barrier Island communities, homes on the islands are formed into dense clusters along gridded roads. The Marsh Island communities differ in that it does not have beach access on any side. Rather, they are surrounded by marsh, SAV, and open water habitat. Marsh Island communities throughout the Back Bays are primarily built on fill that extends urbanized areas from the barrier islands into the bays.

The communities represented on this map are a few examples of the many identified marsh island communities throughout the Back Bay system.


### Legend

 Island Community Type

 Wetland

 NJIWW

 Major Road








## MARSH ISLAND COMMUNITY: NONSTRUCTURAL WITH NNBF

Paired nonstructural and NNBF measures should be considered for Marsh Island communities within the context of broader bay-wide initiatives, such as the “Barnegat Bay Shallows” depicted in Part II of this report. Marsh Island communities are densely inhabited with very little space for NNBF measures on the island. Surrounding marshlands in the bays have the potential to absorb and buffer storm surge and floodwaters. Relocation and acquisition along the edges of these areas could provide space for NNBF features to mitigate risk to the interior. More expansive relocation and acquisition of these areas for NNBF could provide CSRM to adjacent communities.

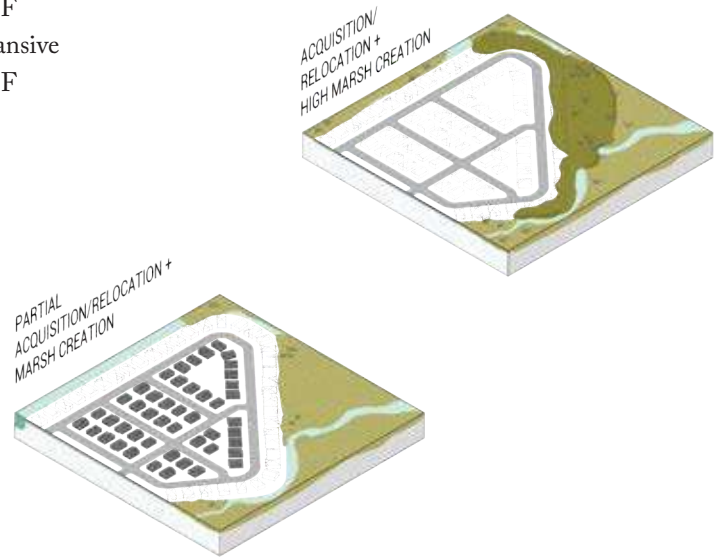


Marsh Restoration / Creation




Acquisition / Relocation

Elevation

Living Breakwaters / SAV

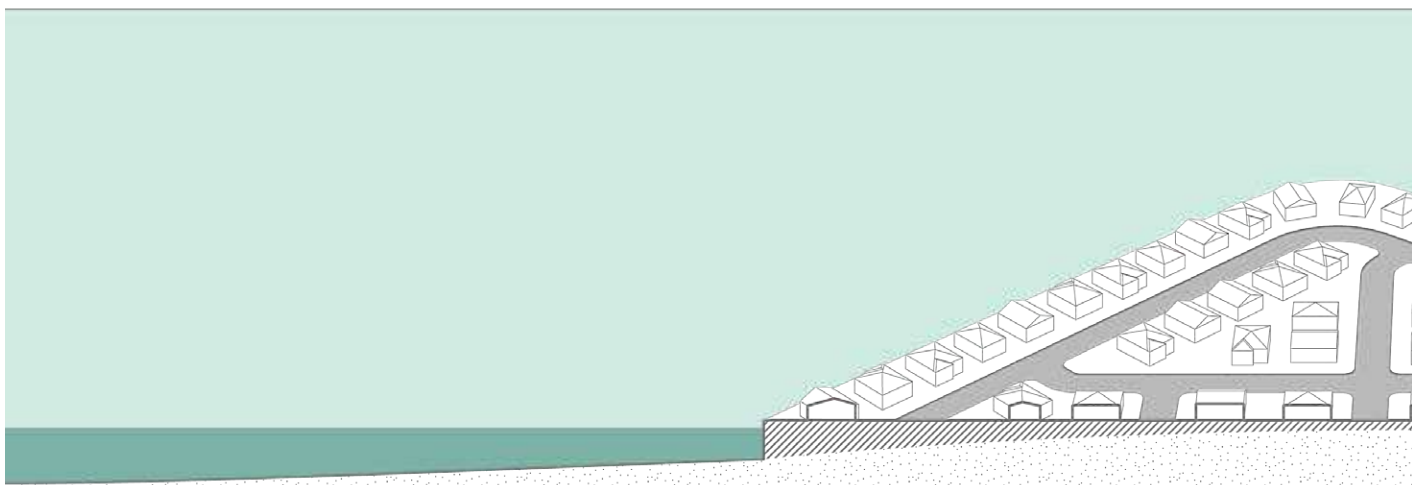

Diagrammatic Section perspective of a hypothetical marsh island community

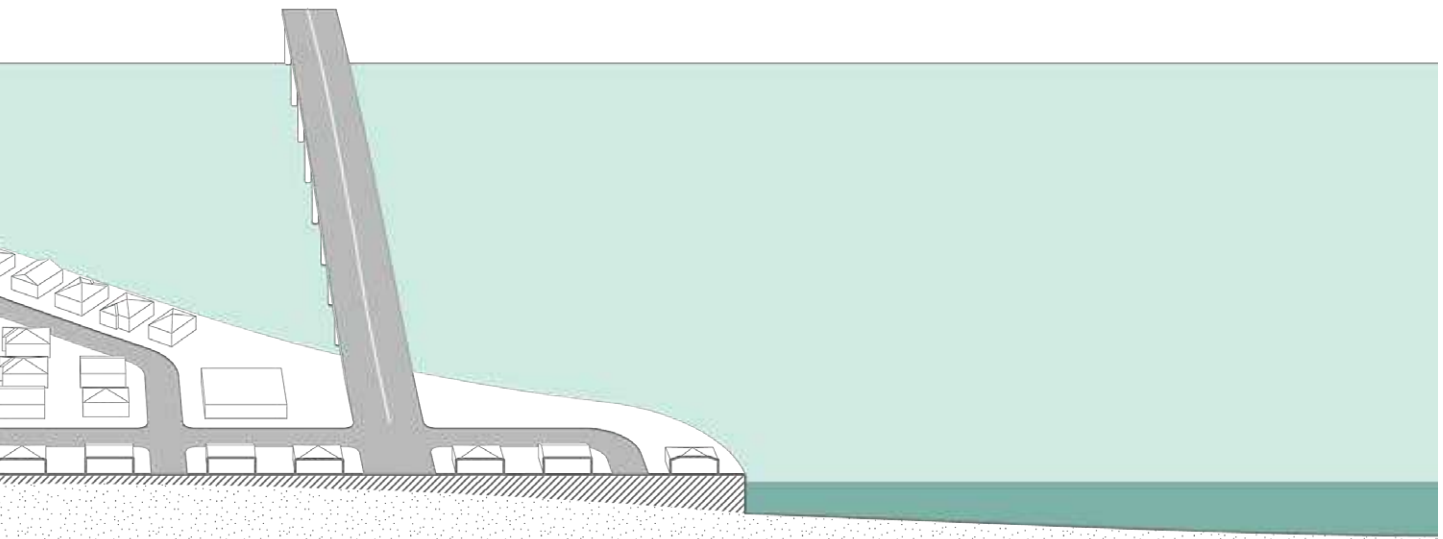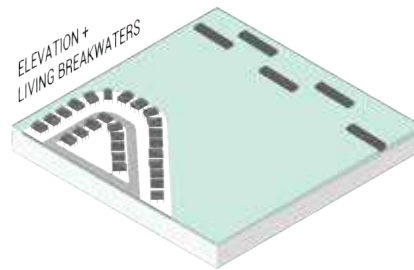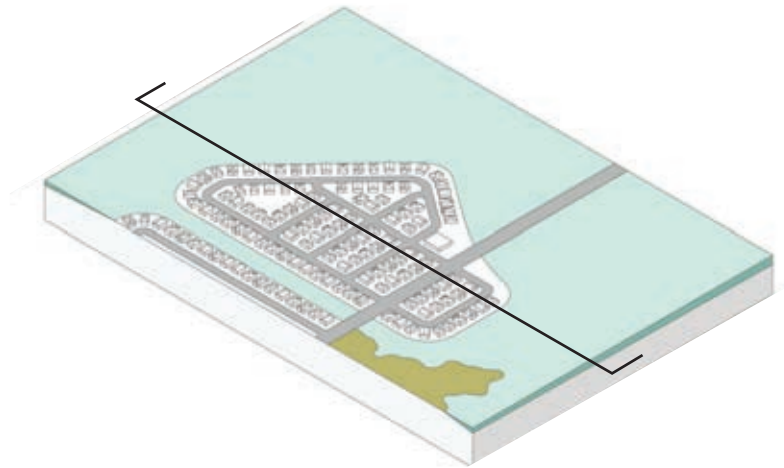

## LAGOON COMMUNITIES

These communities are defined by canals, docks, and direct waterside access. They contain boat lanes that provide access to a row of homes on either side. Typically Lagoon communities were constructed by dredging “finger” canals into existing marshes and using the resulting dredged material to fill along either side of the canal. As a result, there are often large stretches of intact marsh on either side of Lagoon communities.

The communities represented on this map are a few examples of the many identified lagoon communities throughout the Back Bay system.

### Legend


 Lagoon Community Type

 Wetland


-- NJIWW

— Major Road



 0 0.25 0.5 1 mi




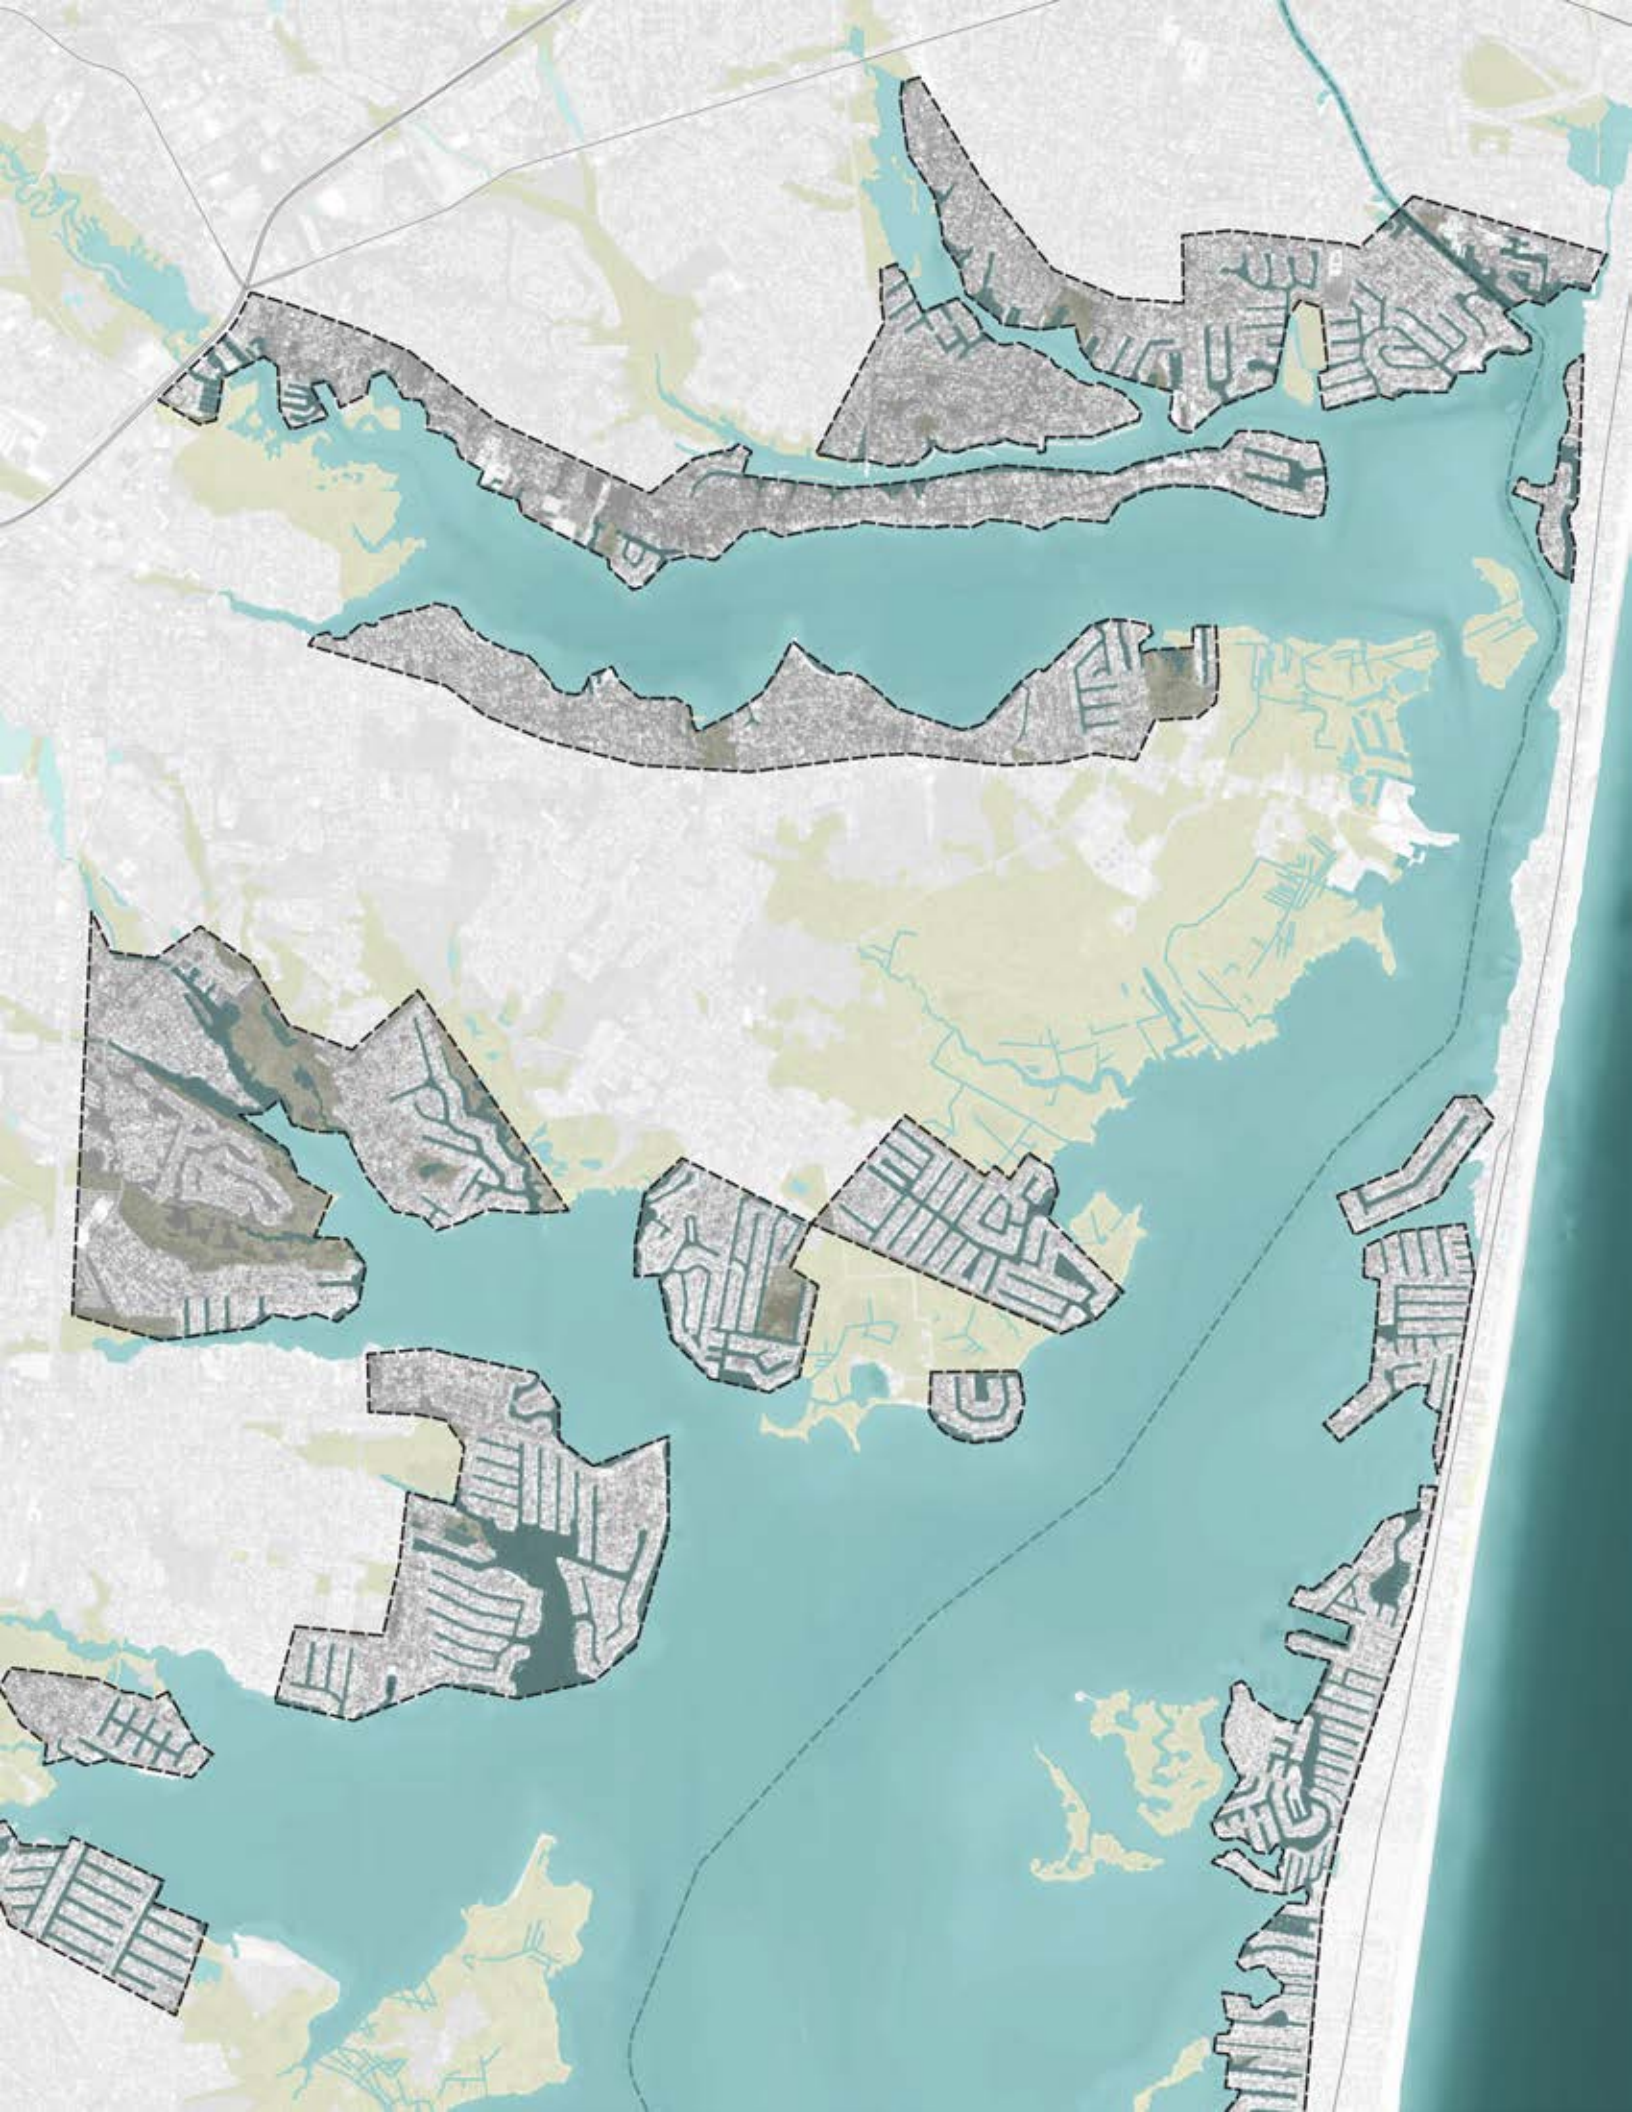

## LAGOON COMMUNITY: NONSTRUCTURAL WITH NNBF

The finger canals are a key spatial constraint on the pairing of NNBF and nonstructural measures near and within Lagoon communities. Building elevation, acquisitions, relocations, and pier removal may be usefully paired with the development of NNBF such as constructed marshes either within (former) finger canals or along the perimeter of the Lagoon community. On the bayward side, improved and created marsh and SAV areas can be considered to absorb and buffer the community from rising waters. (NNBF options for Lagoon communities that would be located further into the bay are explored on pages 42-43 of this report.)

Most NNBF deployments for Lagoon communities would likely lead to a reduction in lots with boat access, making acquisition and/or relocation potentially key strategies. It is possible that community marinas could replace some lost individual lot access; community marinas would require less bay perimeter and facilitate the use of NNBF. This option would need to be explored in conversation with individual communities.

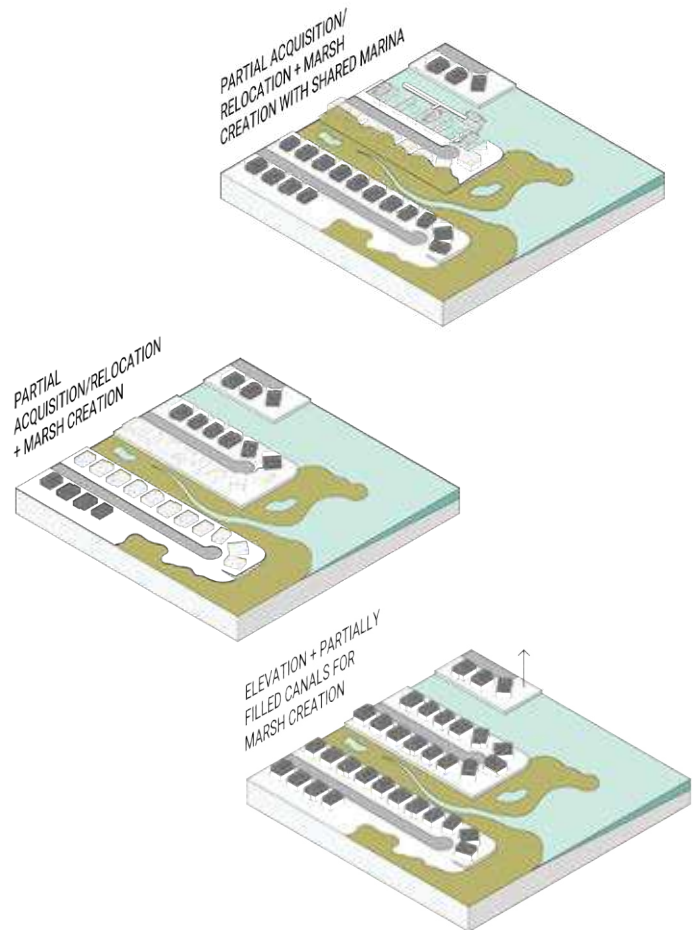


### Marsh Restoration / Creation

### Canal Filling

### Acquisition / Relocation

### Elevation


### Marsh Island Creation / Speed Bumps

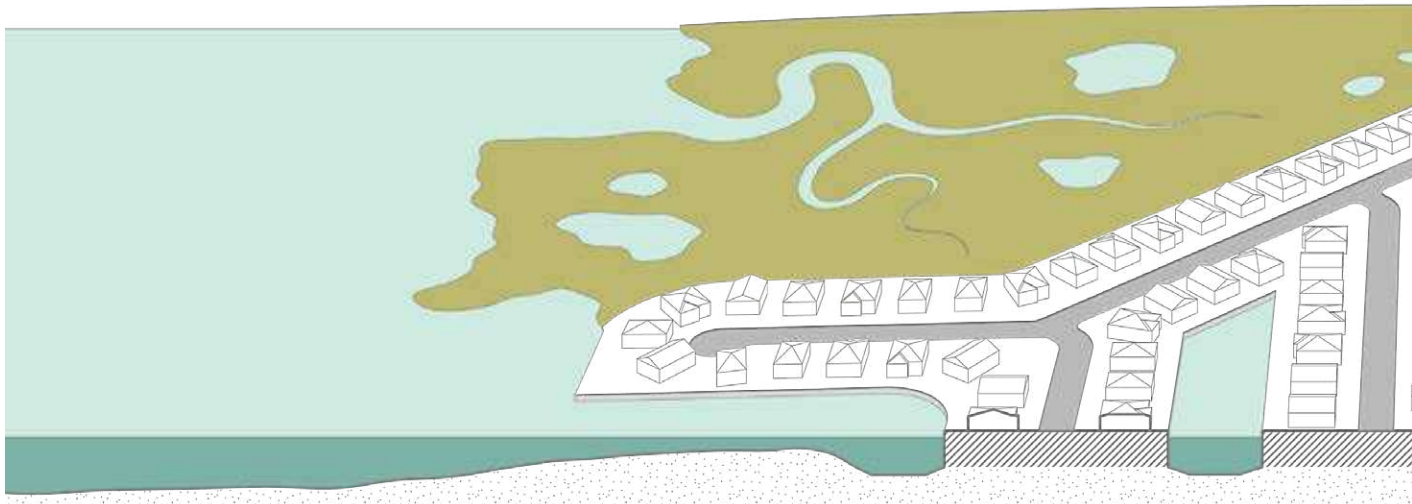


Diagrammatic section perspective of a hypothetical lagoon community




ACQUISITION/  
RELOCATION +  
MARSH CREATION

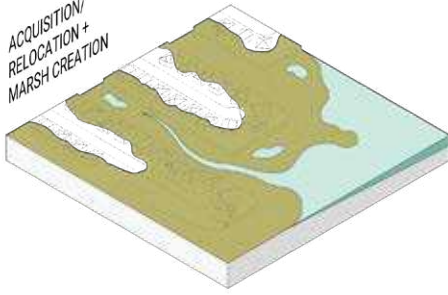



ELEVATION +  
FILLED CANALS  
FOR MARSH CREATION

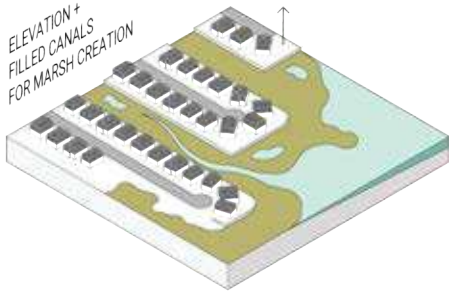

ELEVATION +  
PIER REMOVAL +  
MARSH MIGRATION  
ALONG LANE SIDES

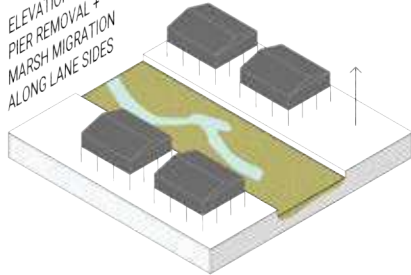

ELEVATION +  
LIVING BREAKWATERS

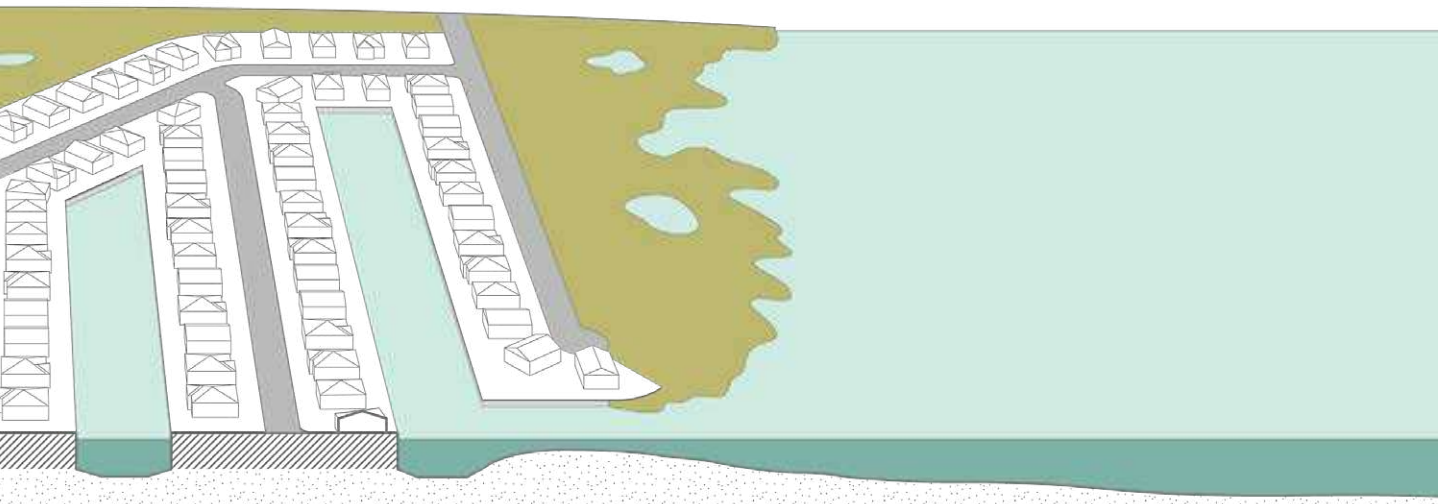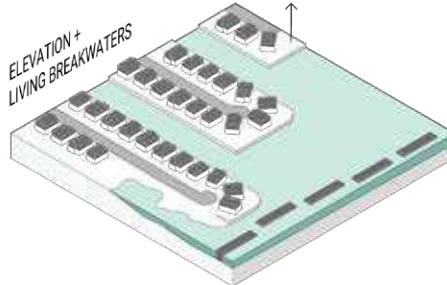



## BAY COMMUNITIES

These communities are located along the Back Bays on the New Jersey mainland. Unlike Islands, Bay communities are defined by water only on one side. More than any of the other Back Bay community types, the urban form of Bay neighborhoods resembles non-coastal communities further inland. Bay communities typically include detached houses, sizeable backyards, gridded roads, cul-de-sacs, and extensive access to several highways and/or major roadways. Bay communities are larger than other coastal neighborhoods and have more defined city-centers as well as non-water related amenities, including wooded parks, golf courses, cemeteries and other non-developed community areas. In these communities, direct waterside access is less common than other neighborhood types.

The community represented on this map is one example of the many identified Bay communities throughout the Back Bay system.


### Legend

 Bay Community Type

 Wetland

 NJIWW

 Major Road









## BAY COMMUNITY: NONSTRUCTURAL WITH NNBF

The combination of nonstructural and NNBF measures can be considered for Bay communities which are adjacent to marsh or have bulkheads and are adjacent to open water. In Bay communities which are adjacent to marsh, mosquito ditches are common. Filling and repairing mosquito ditches, as well as creating marshes in degraded areas, will help provide CSRM benefits in these areas and reduce further marsh deterioration from fragmentation. SAV beds paired with “living breakwaters” can be created within the bays to further buffer storm surge and reduce erosion to sensitive ecological edges.

When acquisition or relocation is possible, marsh can be created with space for future upland migration. Further protections and marsh migration space can be created with an ecotone levee.





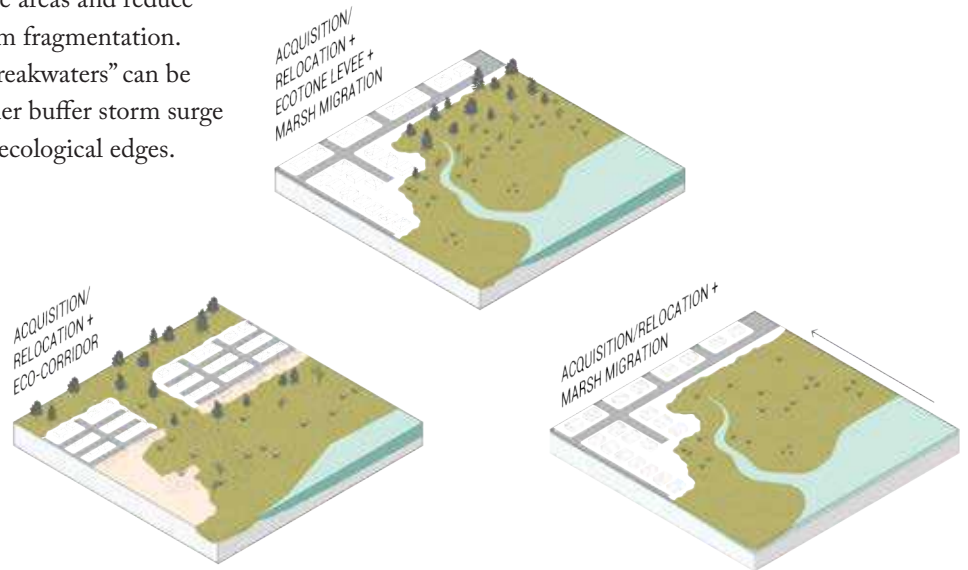


Green Corridor Creation

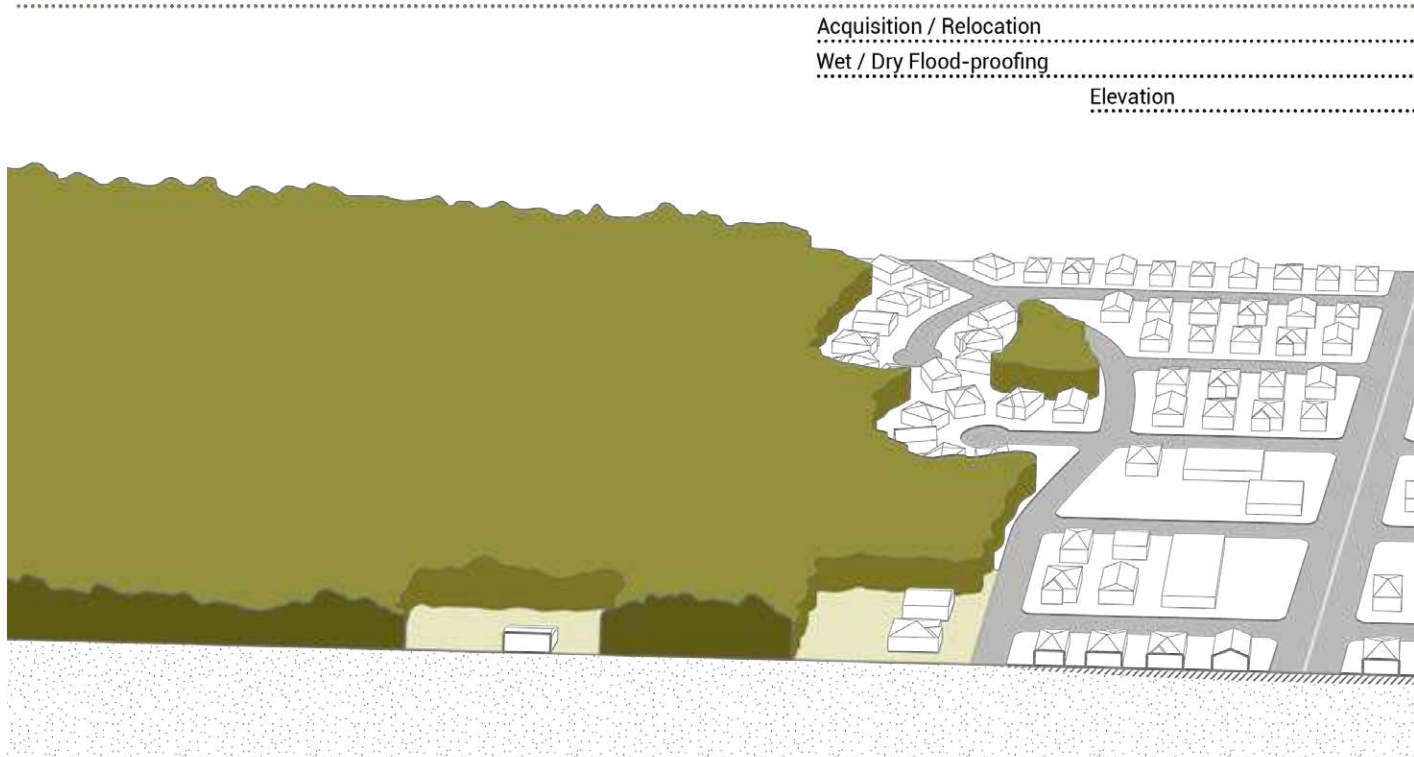

Diagrammatic Section perspective of a hypothetical bay community



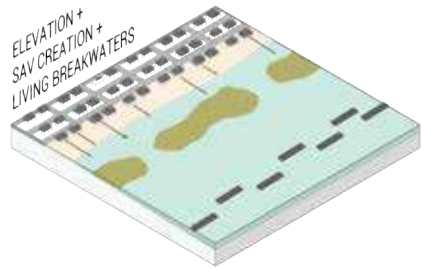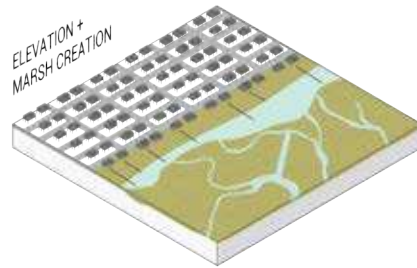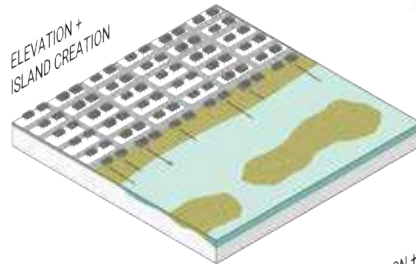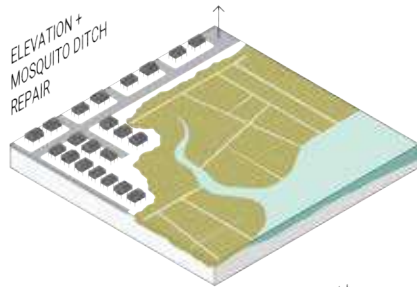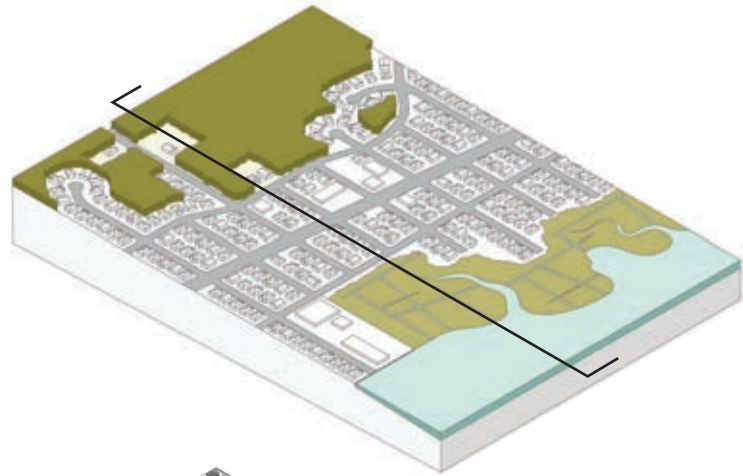


Ecotone Levee

Marsh Migration Space

Fill / Repair Mosquito Ditching

Marsh Restoration / Creation

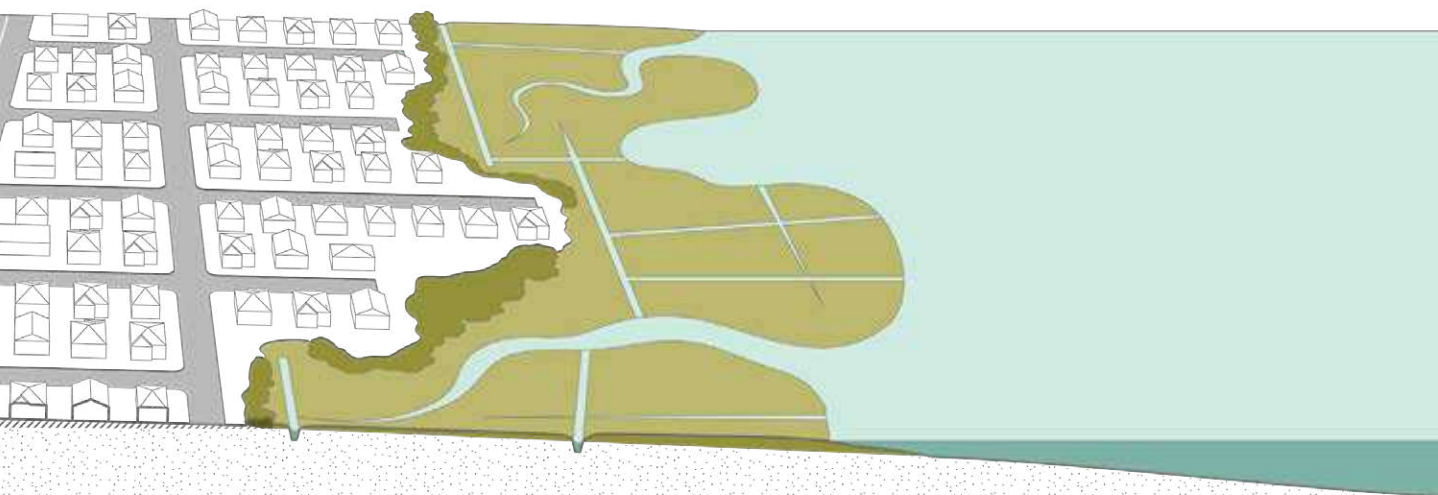

## Reflections and Further Considerations

Nonstructural measures and NNBF are mutually supportive. Nonstructural measures may create opportunities for the application of NNBF in the form of managed coastal retreat and strategic land use changes, while the application of NNBF has the potential to support investments in building retrofits. In addition to their physically cooperative alignments, nonstructural measures together with NNBF offer opportunities to address social and environmental concerns – establishing socially and ecologically resilient communities in order to manage risk to both human communities and ecological systems. However, the pairing of NNBF and nonstructural measures also have the potential to increase risk and/or vulnerability, which may be inequitably distributed within a broader region like the Back Bays. As a result, careful design, modeling, and planning is necessary for the successful combined application of NNBF and nonstructural measures, both physical and nonphysical.

With NNBF such as living breakwaters or ecotone levees, the positive benefits of a NNBF applied in one area might create vulnerabilities in another. (See Part III of this report, “NNBF Performance and Suitability”, for discussion of some examples of how NNBF’s CSRM effects may be positive in some areas and negative in others. It should also be noted that structural measures have a similar potential for divergent effects.) Modeling of the broader effects of new features is necessary to understand their implications and relationships to adjacent areas. Extensive and multi-scalar modelling would be helpful to plan for both SLR and changing ecological and hydrological dynamics in the bays. In the long run, redundancy and mutually supportive NNBF can help mitigate the impacts of SLR and catalyze desirable ecological shifts such as upland marsh migration.

Nonphysical measures such as changes to zoning, land use, and policy that support NNBF can disproportionately affect vulnerable communities and residents that occupy or depend on the current state and use of those lands. The acquisition and relocation of property and buildings has proven in many regions to be especially complex, with a high risk that impacts will be inequitably distributed. Managed coastal retreat (as planned adaptation) and unmanaged coastal retreat (in the wake of storm events) can perpetuate and deepen inequalities and vulnerabilities for both individuals and coastal communities as wholes.

Many examples of managed retreat have missed opportunities to address the important physical and social interconnections that communities and residents rely on for social, economic, and ecological resilience. Holistic planning across communities should be undertaken to avoid disproportionate burdens on vulnerable residents while increasing the potential for risk reduction. Efforts by researchers and practitioners in design and planning have begun to address these tendencies and consider more comprehensive approaches.

For instance, in Louisiana, the state's Coastal Protection and Restoration Authority has been developing nonstructural measures as part of their Coastal Master Plan since 2012. They have acknowledged the importance of measures that not only include building retrofits but also seek to support and grow socially resilient communities. Louisiana's Strategic Adaptations for Future Environments (LA SAFE 2019) is a multidisciplinary effort that has approached managed coastal retreat through extensive community engagement in coordination with risk reduction and restoration strategies. Also in Louisiana, efforts to relocate the Isle de Jean Charles community from their existing lands, which are imperiled by RSLR, to a newly-designed community further inland have exposed both challenges and pathways for communities to participate in the planning and design of their coastal retreat. These experiences, and others in locations like Puerto Rico and south Florida, suggest the importance of developing pathways for co-design and co-creation for displaced and relocated communities (Lizzie Yarina, Miho Mazereeuw, Larisa Ovalles 2019; Masoud 2017).

The potential for CSRM benefits through the combination of nonstructural measures and NNBF to reduce risk and strengthen the ecological resilience of the broader coastal landscape is high. These applications, facilitated by managed coastal retreat in particular, should be approached with thoughtful and careful coordination to protect and create equitable and resilient coastal communities and landscapes.



# Part V

## INITIAL QUALITATIVE COST INVESTIGATIONS

### **Considering Specific NNBF Ideas**

As described in other sections of this report, the collaborative team initially identified numerous NNBF ideas through a series of workshops and communications. The collection of EWN ideas for each region can be found in Part I. As noted previously, seven concepts emerged as priorities to advance with additional analysis, drawings and renderings, current progress on which is documented in Part II. Those example projects include: Ocean City horizontal levee, created NNBF islands for lagoon communities, integration of surge filters in strategic locations, and terracing of coastal lakes. These prioritized examples exist as transferable concepts. For example, there are numerous locations where horizontal levees could be developed in addition to the Ocean City location. Similarly, placement of NNBF island(s) in close proximity to lagoon communities could occur at several locations within the NJBB. With these initial investigations, the EWN-LA team identified multiple communities where constructed islands could offer CSRM benefits (see pages 20-23).

Aside from the proposed terracing in the Coastal Lakes Region, constructing the remaining NNBF priorities will likely require large volumes of dredged sediment. Takeoffs that follow on pages 88-91 highlight the estimated cubic yards of material that would be required for the Tuckerton Peninsula options, Beach Haven Surge Filter, and Ocean City levee/wall, respectively, assuming the projects would be approached using the indicated dimensions. Acreage of vegetation (and proposed type relative to elevation) for each of the NNBF ideas is also offered in the same takeoffs. These material volumes and acreages should be understood as order of magnitude estimates.

These projects could be scaled up or down depending on availability of sediment, project funding, and/or the magnitude of storm risk reduction required from the project. Larger, more complex NNBFs at different locations in the NJBB are currently being modeled to determine flood risk and storm risk reduction benefits. The model area extents for these NNBF can be seen on page 39.

## Cost Estimates and Associated Challenges

The team investigating NNBF ideas for possible inclusion in the NJBB CSRM study also conducted an initial characterization of data that would support the development of “high-level”, qualitative cost estimates for preferred strategies and structures. As more information became available to the team, however, it was apparent that a large number of variables, coupled with a very broad range of uncertainty, will have great influence on adequately reporting anticipated cost, particularly at this stage of project development. The NACCS parametric cost data was reviewed as part of this analysis. Of the available data, the Excel Workbook titled, “2013 Parametric Cost Estimate” offered some insight with respect to cost estimates for traditional NNBF habitats including, but not limited to: wetlands, reefs, and submerged aquatic vegetation (Appendix 1).

Additional information was also made available to the team. Table 1 highlights that information and example cost for various NNBF-type efforts that have been reported in the NJBB and for a recent 2019 island restoration project in the Chesapeake Bay.

**Table 1. Costs associated with recent NNBF-type efforts in Chesapeake Bay and New Jersey Back Bays.**

### Chesapeake Bay

2019 Swan Island Restoration	Mob/Demob	~ \$1,400,000
	Dredging Cost (Range)	\$8-\$15/cyd
	Ajax (31 meters)	\$42,000
	Planting (200,000 plants for ~14 acres)	\$480,000
	Turbidity curtain (500 lf), hay bayles (170 lf), coir fiber logs (2600 lf), and turbidity curtain (500 lf)	\$155,000

### New Jersey Back Bays

NJ DOT	Dredging Cost	\$247/cyd
Ring Island	Dredging Cost (Range)	\$30-\$45/cyd
Avalon	Dredging Cost w/ containment	~ \$45/cyd
Mordecai Island	Dredging Cost w containment	\$28-\$30/cyd

### Other Applicable Information

(Based on Activities in NJBB)	Oyster Castles	\$300/lf (estimate)
	Rock Sills	\$600/lf (estimate)
	Breakwaters	\$1100 - \$1200/lf (estimate)
	Remove Sediment from Existing CDFs*	\$50/cyd (estimate)

\*community may require additional tipping fees

While the 2013 Parametric Cost Estimates (Appendix 1) and information in Table 1 offer considerable information about the materials, cost per unit, estimated O&M, anticipated project life, etc., there are inherent pitfalls in extrapolating these values (and approaches) in order to estimate the cost of prioritized NNBF ideas for the NJBB. Those pitfalls exist because there are currently many intangible factors that are specific to the diverse geographical settings in the NJBB. To date, those intangible factors have not been considered on a system scale or in a way that would inform the development of qualitative cost estimates. Those factors include, but are not limited to:

- **Maximizing the use of natural processes in the NJBB system to support construction and maintenance of the proposed NNBF.** A considerable amount of hydrodynamic data, models, etc. exists for the NJBB. Leveraging this information to identify areas where water circulation patterns, tides, currents, etc. can be harnessed to transport and deposit sediment in order “feed” (i.e., expand and/or maintain) NNBF is critical to optimizing placement features that are likely to be more self-sustaining. In turn, overall construction and O&M cost would likely be reduced as the result of optimizing siting and performance of the NNBF.
- **Identifying and strategically expanding existing natural features within the NJBB.** Existing natural features are ubiquitous within the NJBB. Where applicable, those existing features could be expanded to increase the engineering and ecosystem service benefits that are achieved. Leveraging these existing features would greatly reduce the overall amount of dredged sediment required for construction of NNBF.
- **Increasing use of sediment derived from maintenance dredging of navigation channels to construct NNBF.** Philadelphia District is responsible for maintaining approximately 500 miles of Federal navigation channels, which includes the Delaware River. Of that, approximately 200 miles are coastal or bay (the New Jersey Intracoastal Waterway composes 117 miles within the coastal/bay complex). However, only a small fraction of that material is used beneficially. Strategically constructing NNBF in locations that support the navigation mission and creates storm risk reduction opportunities would leverage funds already dedicated to the navigation business line.
- **Simplifying the overall project design and construction approach to NNBF.** In many situations, NNBF are over designed and/or constructed with an exorbitant number of stabilization and/or sediment containment measures. Likewise, planting of vegetation is often integrated into a project, and in most circumstances, that action could be scaled back. In some areas, planting may not be necessary at all with the availability of sufficient seed stock. Allowing additional time for maturity of the site(s), which would also allow for the “shaping/sculpting” by natural processes, could also result in greater cost savings.
- **Locating and characterizing sediment sources.** Sediment characteristics (e.g., sand vs. silt/clay) and pumping distance can greatly influence overall cost to the project. Knowing what type of material is available, where it is located, and proximity to a proposed NNBF site(s) are important parameters to consider. Strategically approaching NNBF siting and advanced characterization of available sediment sources would likely reduce overall project cost.



- **Developing contracts with dredging vendors that allow for more latitude in NNBF construction.**  
The disparity in reported cost between the NJDOT project (~ \$247/cyd) and other NJBB projects (~ \$28 - \$45/cyd) highlights the variability of dredging cost when a contractor must accept all of the risk associated with construction of a project that includes contracting language with meticulous specifications (See Table 1). NNBF are very dynamic and some variation in overall approach to construction (and resulting footprint) will likely not reduce the overall benefits derived from the project. Allowing contractors more latitude in approach to project construction, enhancing onsite integration/communication between USACE and contractor staff, and adopting a “learn and refine” approach to contracts and project construction would likely reduce overall project cost.

When looking back across all of these factors, dredged sediment appears as a common denominator, and it is also an essential component of most NNBF that were identified through this study. The unknowns and/or unrealized opportunities that currently exist, coupled with the large NNBF size (and resulting volumes of dredged sediment, which would need to meet qualitative guidelines for NNBF construction), make it imprudent to offer estimated costs at this time. If pursued at this stage, the calculations would likely be very inaccurate and reflect very prohibitive values that would ultimately predispose such innovative EWN strategies from further consideration.

In closing, the previously described factors have not been investigated to any appreciable degree in order to identify and possibly create efficiencies. Once evaluated, however, the results could be integrated into an overall strategy that informs a logical approach for NNBF construction and O&M, thereby reducing project cost. Adaptive management will also provide opportunities to learn, refine, and improve practices over time. Finally, increase in long-term demand for NNBF projects will lead to more competition within the marine construction sector, including development of more efficient equipment and practices. If pursued correctly, innovative approaches are likely to emerge and revolutionize resource management in the NJBB, while also contributing considerable savings when integrating NNBF projects into an overall approach to CSRM.

## Takeoffs for Individual Design Concepts

### **Ocean City Levee / Wall M-S:**

#### *Fill Material*

910,000 cu. yd. within design area

#### *Sea Wall*

6400 Lineal Feet within design area

#### *Plantings*

7 acres High Marsh

43 acres of Tall Shrubland

### **Calculation Assumptions**

The approximate length of the levee / wall to be modified per the proposed design would be 6,400 lf. Of this, approximately 1300 lf would be expanded to accommodate access and recreational areas and would consist of +/- 251,850 cu yd of material. The remaining 5100 lf would be standard horizontal levee at 1:30 and consist of +/- 655,500 cu yd of material. A standard flood wall will exist at the core of the levee and the first 2 elevational feet of the levee from the existing marsh will be planted with High Marsh plants, the remainder of the levee will be planted with Tall Shrubland plants and trees.

## **Tuckerton Peninsula L**

### ***Option 1: Horizontal Levee***

Levee Construction Material:

Roadway: 23,000 linear feet

Bridges: 5 bridges totaling approximately 2700 linear feet

### ***Plantings***

Mowed salt meadow: 27.5 acres (1.2 million sq ft)

Tall shrubland: 243 acres (10.6 million sq ft)

Salt shrub: 108 acres (4.7 million sq ft)

High marsh: 36.7 acres (1.6 million sq ft)

## **Calculation Assumptions**

The approximate length of the horizontal levee feature would be 20,000 lf. Based on the assumed slope of 1:30 on both sides of the levee and allowing for the presence of the existing roadbed, an approximate sectional area of 7,650 sq ft for the horizontal levee has been obtained. Multiplying these two measurements produces the estimate of 5.7 million CY. The habitat areas are based on the distributions of plant communities shown in the plan and section for this option.



***Option 2: Living Breakwaters***

35 individual breakwaters totaling 21,600 linear feet

***Option 3: Marsh Enhancement***

Fill for constructing hammocks: 680,000 CY

Dredged material for thin-layer placement: 530,000 CY

Material for marsh island construction: 1.32 MCY

***Plantings***

Salt shrub hammocks: 234 acres (10.2 million sf)

Marsh enhancement via thin-layer placement: 654 acres  
(28.5 million sf)

New marsh islands and existing marsh island expansion:  
546 acres (23.8 million sf)

**Calculation Assumptions**

The hammocks are assumed to be raised to an average elevation of +3' NAVD88, from an average existing grade of +1.2' NAVD88. Thin-layer placement is assumed to involve placement of material to an average depth of 6". (Depending on level of subsidence, additional 'lifts' of material may be needed to achieve marsh plane elevation.) Marsh island construction is assumed to require an average placement of 1.5' of material, based on approximate average depths in the island construction locations.

## **Surge Filter XL**

### *Fill Material*

The proposed thickening of the sedge islands to form a surge filter, per the design in this report would require approximately 7 million cubic yards of fill.

### *Planting Areas*

If the new islands are constructed with slopes similar to the surrounding islands (most well under 10%), a large percentage of each island would fall within the possible spartina alterniflora planting zone. An estimate of 60% is likely conservative, thus requiring 450 acres of low marsh planting.

## **Calculation Assumptions**

The average depth in the areas where islands are to be created is approximately -2' MLLW (-3.83' NAVD88). The height of the islands would vary based on size, but would not exceed +4' NAVD88. For calculation purposes this report assumes an average elevation of all islands at +2' NAVD88. Thus the elevation of material added for the island areas would be +/- 5.83'. The proposed configuration of contains approximately 750 acres of newly created islands.

## **Barnegat Bay XXL:**

As the current description of this strategy is general, rather than location-specific, it is not presently possible to make a precise estimate of sediment volumes required or habitat area that might be produced. However, as a rough indicator of the feasibility of a 'shallows' strategy, it is worth noting that the area of Barnegat Bay is roughly 167 sq km. If that 15% of that area were 'shallowed' by 1 m, this would require 25,000,000 cubic meters or 32,600,000 cubic yards of material. (A 'shallows' strategy would likely be more targeted than this, and thus likely require less material.)

# References

- Bélanger, P. *Landscape as infrastructure: a base primer*. Routledge. 2013.
- Collins, Beryl Robichaud and Anderson, Karl H.. "Plant Communities of New Jersey: A Study in Landscape Diversity." New Brunswick, New Jersey: Rutgers University Press, 1994.
- Hu, Kelin; Chen, Qin; and Wang, Hongqing. "A numerical study of vegetation impact on reducing storm surge by wetlands in a semi-enclosed estuary." *Coastal Engineering* 95 (2015) 66-76.
- Masoud, Fadi. "Coding Flux: Redesigning the Migrating Coast." *Scenario Journal* (2017). Accessed May 2020 <https://scenariojournal.com/article/coding-flux/>.
- McKenna, Kim et al. "Quantification of Flood Event Forcing and the Impact of Natural Wetland Systems: Great Bay Boulevard, Ocean County, New Jersey." US Army Corps of Engineers, Institute for Water Resources, 2018. <https://www.barnegatbaypartnership.org/wp-content/uploads/2018/10/1134-McKenna-et-al-FHWA-Great-Bay-Boulevard-2018.pdf>
- Miller, Kenneth G. et al. New Jersey Sea Level Rise Fact Sheet. Earth and Planetary Sciences and Institute of Marine and Coastal Science, Rutgers University, 2014. [https://geology.rutgers.edu/images/stories/faculty/miller\\_kenneth\\_g/Sealevelfactsheet7112014update.pdf](https://geology.rutgers.edu/images/stories/faculty/miller_kenneth_g/Sealevelfactsheet7112014update.pdf)
- Moller, Iris et al. "Wave attenuation over coastal salt marshes under storm surge conditions" *Nature Geoscience* 7 (October 2014) 727-731.
- Mossop, E. "Landscapes of Infrastructure." In *The Landscape Urbanism Reader*, ed. C. Waldheim. Princeton Architectural Press, 2006.
- Narayan, Siddhart et. al. "The value of coastal wetlands for flood damage reduction in the Northeastern United States." *Nature: Scientific Reports*. 7: 9463, (August 2017). <https://www.nature.com/articles/s41598-017-09269-z.pdf>
- NOAA. "Conserving coastal wetlands for sea level rise adaptation." <https://coast.noaa.gov/applyit/wetlands/understand.html> (retrieved 2 February 2020).
- Orff, K. and SCAPE Landscape Architecture. *Toward an urban ecology*. The Monacelli Press, 2016.
- Spirn, A. W. *The granite garden: urban nature and human design*. Basic Books, 1984.
- Tiner, R. W., Jr. "Wetlands of New Jersey." U.S. Fish and Wildlife Service, National Wetlands Inventory, Newtown Corner, MA. July, 1985.
- Wamsley, Ty V. et al. "The potential of wetlands in reducing storm surge." *Ocean Engineering* 37 (2010) 59-68.
- Vuik, Vincent et al. "Nature-based flood protection: the efficiency of vegetated foreshores for reducing wave loads on coastal dikes." *Coastal Engineering* 116 (2016) 42-56.
- Yarina, Lizzie, Miho Mazereeuw, and Larisa Ovalles (2019) "A retreat critique: Deliberations on design and ethics in the flood zone" *Journal of Landscape Architecture* 14, no. 3 (2019): 8-23.



## Data Sources:

- Coastal Research Center, Stockton University. New Jersey Waterways Sediment Characterization. Accessed January 31, 2020. <https://stockton.edu/coastal-research-center/project-archive/waterways-sediment.html>.\*
- Coastal Research Center, Stockton University. Dredge Hole Utilization. Accessed January 31, 2020. <https://stockton.edu/coastal-research-center/dredged-hole-utilization.html>.\*
- ESRI, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community. World Imagery. Accessed January 2020 using ESRI ArcGIS.
- Federal Emergency Management Agency (FEMA). FEMA Flood Zones Map Service. CoastalFlooding/FIRM. Accessed January 2020 using NJ FloodMapper. <https://njmaps1.rad.rutgers.edu/arcgis/rest/services/CoastalFlooding/FIRM/MapServer>.
- FEMA Modelling Task Force. Sandy Surge Extent Map Service. Coastal Flooding/StormSurge. Accessed January 2020 using NJ FloodMapper. <https://njmaps1.rad.rutgers.edu/arcgis/rest/services/CoastalFlooding/StormSurge/MapServer>.
- National Hurricane Center, NOAA. SLOSH Cat 1-4 Map Service. Coastal Flooding/StormSurge. Accessed January 2020 using NJ FloodMapper. <https://njmaps1.rad.rutgers.edu/arcgis/rest/services/CoastalFlooding/StormSurge/MapServer>.
- New Jersey Department of Environmental Protection (NJDEP). Watershed Management Areas in New Jersey. Accessed January 2020 using NJGIN Open Data. <https://njogis-newjersey.opendata.arcgis.com/datasets/njdep:watershed-management-areas-in-new-jersey/data?geometry=-78.863%2C39.134%2C-70.519%2C40.610>.
- New Jersey Department of Environmental Protection (NJDEP), Office of Information Resources Management (OIRM), Bureau of Geographic Information Systems (BGIS). National Hydrography Dataset (NHD) Waterbody 2002. Accessed January 2020. <http://www.nj.gov/dep/gis/listall.html>, <http://www.nj.gov/dep/gis/geoweb splash.htm>
- New Jersey Department of Environmental Protection (NJDEP). Land Use / Land Cover Map Service. 2012 Land Use/Land Cover. Accessed January 2020 using NJ FloodMapper. <https://terrene.njaes.rutgers.edu:6443/arcgis/rest/services/>.
- Rutger University Center for Remote Sensing and Spatial Analysis (CRSSA). Open Space Map Service. Environment/Open Space. Accessed January 2020 using NJ FloodMapper. <https://njmaps1.rad.rutgers.edu/arcgis/rest/services/Environment/OpenSpace/MapServer>.
- Rutger University Center for Remote Sensing and Spatial Analysis (CRSSA). Tidal Marsh Retreat Map Service. Environment/MarshRetreat. Accessed January 2020 using NJ FloodMapper. <https://njmaps1.rad.rutgers.edu/arcgis/rest/services/Environment/MarshRetreat/MapServer>.

\*Stewart Farrell and the Stockton University Coastal Research Center shared GIS information associated with these projects. The locations shown in the maps in this report correspond to detailed datasets that should be referenced in future planning and design initiatives of NNBF and ecological restoration in this region.

# Appendix 1:

## NACCS 2013 Parametric Cost Data

### Beach Restoration - Parametric Cost Estimate

**Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$3,000,000	\$3,000,000
Design Beach Fill Volume	1,279,056	cu.yd.	\$12	\$15,348,672
Advance Fill Volume	401,989	cu.yd.	\$12	\$4,823,868
<b>Subtotal</b>				<b>\$23,172,540</b>
Contingency	25%			\$5,793,135
<b>Total Construction</b>				<b>\$28,965,675</b>
E&D	10%			\$2,896,568
S&A	12%			\$3,475,881
<b>Total Estimated First Construction Cost</b>				<b>\$35,338,124</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$3,533.81</b>

Beach Fill Length 10,000 ft

**Table 2. Renourishment Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$3,000,000	\$3,000,000
Renourishment Fill Volume	401,989	cu.yd.	\$12	\$4,823,868
<b>Subtotal</b>				<b>\$7,823,868</b>
Contingency	25%			\$1,955,967
<b>Total Construction</b>				<b>\$9,779,835</b>
E&D	10%			\$977,984
S&A	12%			\$1,173,580
<b>Total Estimated Renourishment Cost</b>				<b>\$11,931,399</b>
<b>Total Estimated Renourishment Cost per Foot</b>				<b>\$1,193.14</b>

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$157.52
Annualized Renourishment Costs		\$277.94
Fill Maintenance		\$23.10
O&M	1%	\$35.34
<b>Total Estimated Annual Average Cost</b>		<b>\$493.89</b>

Project Life	50	Years
Renourishment Interval	4	Years
Discount Rate	3.75%	
CRF (First Construction)	0.045	
PVF (Renourishments)	5.226	



**Revetment Parametric Cost Estimate****Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$200,000	\$200,000
Armor Stone	62,745	ton	\$150	\$9,411,750
Underlayer	26,335	ton	\$150	\$3,950,250
Toe Armor	11,085	ton	\$150	\$1,662,750
Geotextile	37,865	sq.yd.	\$15	\$567,975
<b>Subtotal</b>				<b>\$15,792,725</b>
Contingency	25%			\$415,688
<b>Total Construction</b>				<b>\$16,208,413</b>
E&D	12%			\$1,945,010
S&A	10%			\$1,620,841
<b>Total Estimated First Construction Cost</b>				<b>\$19,774,263</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$3,954.85</b>

Revetment Length                      5,000 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$176.28
O&M	1%	\$39.55
<b>Total Estimated Annual Average Cost</b>		<b>\$215.83</b>

Project Life                      50      Years

Discount Rate                      3.75%

Capital Recovery Factor                      0.045

## Overwash Fan - Parametric Cost Estimate

**Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$3,000,000	\$3,000,000
Overwash Fill Volume	200,000	cu.yd.	\$12	\$2,400,000
<b>Subtotal</b>				<b>\$5,400,000</b>
Contingency	25%			\$1,350,000
<b>Total Construction</b>				<b>\$6,750,000</b>
E&D	12%			\$810,000
S&A	10%			\$675,000
<b>Total Estimated First Construction Cost</b>				<b>\$8,235,000</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$4,117.50</b>

Overwash Length                      2,000 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$183.53
O&M	0%	\$0.00
<b>Total Estimated Annual Average Cost</b>		<b>\$183.53</b>

Project Life	50	Years
Renourishment Interval	4	Years
Discount Rate	3.75%	
CRF (First Construction)	0.045	

**Storm Surge Barriers - Parametric Cost Estimates**

Barrier Location	State	Length(ft)	First Construction Costs		Average Annual Costs	
			Total Cost	Avg. (\$/ft)	Total Average	Average
					Annual Cost	Annual Cost
			(\$MILL)	(\$/ft)	(\$MILL)	(\$/ft)
Boston Harbor	MA	2,000	2,795	1,397,550	211	105,656
Beverly	MA	900	750	832,840	57	62,963
Pt. Judith Harbor	RI	300	141	470,270	11	35,553
Bridgeport	CT	3,000	3,259	1,086,192	246	82,117
Milford	CT	180	96	532,205	7	40,235
Verrazano Narrows	NY	4,190	5,612	3,536,762	409	97,549
Arthur Kill	NY	2,700	2,627	973,026	199	73,561
Newtown Creek	NY	400	287	718,203	22	54,297
Rockaway Inlet	NY	2,800	2,093	747,667	158	56,524
East Rockaway Inlet	NY	1,400	949	677,691	72	51,234
Jones Inlet	NY	2,250	1,617	718,825	122	54,344
Fire Island Inlet	NY	2,700	1,981	733,645	150	55,464
Moriches Inlet	NY	900	612	679,679	46	51,384
Shinnecock	NY	900	592	657,665	45	49,720
Cedar Beach	NY	600	526	875,999	40	66,226
Port Jefferson	NY	1,150	1,016	883,371	77	66,783
Huntington Bay	NY	2,700	2,479	918,093	187	69,408
Oyster Bay	NY	2,400	2,226	927,361	168	70,109
South River	NJ					
Flat Creek	NJ					
Pews Creek	NJ					
East Creek	NJ					
Sandy Hook-Breezy Point	NY/NJ	28,500	34,351	1,205,300	2,597	91,122
Cheesequake	NJ	270	148	547,788	11	41,413
Shewsbury River	NJ	1,650	1,022	619,603	77	46,842
Shark River	NJ	100	50	499,607	4	37,771
Manasquan Inlet	NJ	420	206	489,824	16	37,031
Indian River Inlet	DE	800	1,165	1,456,342	88	110,100
Christiana River	DE	1,250	1,318	1,054,603	100	79,729
Darby Creek PA	PA	420	172	410,109	13	31,005
Schuykill, PA	PA	720	643	893,303	49	67,534
Baltimore Patapsco	MD	2,250	1,560	1,520,388	152	67,348



Baltimore Bear Creek	MD	3,600	1,590	441,586	120	33,384
Solomons Island	MD	750	380	506,342	29	38,280
Ocean City	MD	2,000	1,488	743,783	112	56,230
Chincoteague Inlet	MD	6,500	3,557	547,215	269	41,370
Rudee Inlet	VA	100	53	531,091	4	40,151
Lynnhaven Inlet	VA	1,000	502	501,698	38	37,929
Little Creek	VA	950	569	598,634	43	45,257
Elizabeth River	VA	2,640	2,009	761,042	152	57,535

**Groins + Beach Restoration - Parametric Cost Estimate****Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$4,000,000	\$4,000,000
Design Beach Fill Volume	1,279,056	cu.yd.	\$12	\$15,348,672
Advance Fill Volume	463,833	cu.yd.	\$12	\$5,565,996
Armor Stone	79,676	ton	\$150	\$11,951,400
Underlayer / Core Stone	31,092	ton	\$150	\$4,663,800
Blanket Stone	36,875	ton	\$150	\$5,531,250
Geotextile	38,219	sq.yd.	\$15	\$573,285
Excavation	75,621	cu.yd.	\$13	\$983,073
<b>Subtotal</b>				<b>\$48,617,476</b>
Contingency	25%			\$12,154,369.00
<b>Total Construction</b>				<b>\$60,771,845</b>
E&D	12%			\$7,292,621
S&A	10%			\$6,077,185
<b>Total Estimated First Construction Cost</b>				<b>\$74,141,651</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$7,414.17</b>

Beach Fill Length                      10,000 ft

**Table 2. Renourishment Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$3,000,000	\$3,000,000
Renourishment Fill Volume	463,833	cu.yd.	\$12	\$5,565,996
<b>Subtotal</b>				<b>\$8,565,996</b>
Contingency	25%			\$2,141,499
<b>Total Construction</b>				<b>\$10,707,495</b>
E&D	10%			\$1,070,750
S&A	12%			\$1,284,899
<b>Total Estimated Renourishment Cost</b>				<b>\$13,063,144</b>
<b>Total Estimated Renourishment Cost per Foot</b>				<b>\$1,306.31</b>

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$330.48
Annualized Renourishment Costs		\$140.97
Fill Maintenance		\$0.00
O&M	1%	\$74.14
<b>Total Estimated Annual Average Cost</b>		<b>\$545.59</b>

Project Life	50	Years
Renourishment Interval	8	Years
Discount Rate	3.75%	
CRF (First Construction)	0.045	
PVF (Renourishments)	2.421	



**Breakwaters + Beach Restoration - Parametric Cost Estimate****Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$4,000,000	\$4,000,000
Design Beach Fill Volume	660,611	cu.yd.	\$12	\$7,927,332
Advance Fill Volume	401,989	cu.yd.	\$12	\$4,823,868
Armor Stone	223,328	ton	\$150	\$33,499,200
Underlayer	58,165	ton	\$150	\$8,724,750
Core/Bedding Stone	8,025	ton	\$150	\$1,203,750
<b>Subtotal</b>				<b>\$60,178,900</b>
Contingency	25%			\$8,374,800
<b>Total Construction</b>				<b>\$68,553,700</b>
E&D	12%			\$8,226,444
S&A	10%			\$6,855,370
<b>Total Estimated First Construction Cost</b>				<b>\$83,635,514</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$8,363.55</b>

Beach Fill Length                      10,000 ft

**Table 2. Renourishment Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$3,000,000	\$3,000,000
Renourishment Fill Volume	401,989	cu.yd.	\$12	\$4,823,868
<b>Subtotal</b>				<b>\$7,823,868</b>
Contingency	25%			\$1,955,967
<b>Total Construction</b>				<b>\$9,779,835</b>
E&D	10%			\$977,984
S&A	12%			\$1,173,580
<b>Total Estimated Renourishment Cost</b>				<b>\$11,931,399</b>
<b>Total Estimated Renourishment Cost per Foot</b>				<b>\$1,193.14</b>

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$372.80
Annualized Renourishment Costs		\$128.76
Fill Maintenance		\$0.00
O&M	1%	\$83.64
<b>Total Estimated Annual Average Cost</b>		<b>\$585.19</b>

Project Life	50	Years
Renourishment Interval	8	Years
Discount Rate	3.75%	
CRF (First Construction)	0.045	
PVF (Renourishments)	2.421	

**Living Shoreline Parametric Cost Estimate****Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$500,000	\$500,000
Armor Stone	33,500	ton	\$150	\$5,025,000
Geotextile	20,000	sq.yd.	\$15	\$300,000
Sand Fill	28,000	cu.yd.	\$20	\$560,000
Grass Plantings	170,000	each	\$2	\$340,000
<b>Subtotal</b>				<b>\$6,725,000</b>
Contingency	25%			\$1,681,250
<b>Total Construction</b>				<b>\$8,406,250</b>
E&D	12%			\$1,008,750
S&A	10%			\$840,625
<b>Total Estimated First Construction Cost</b>				<b>\$10,255,625</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$2,051.13</b>

Living Shoreline Length                      5,000 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$91.43
O&M	0.5%	\$10.26
<b>Total Estimated Annual Average Cost</b>		<b>\$101.68</b>

Project Life	50	Years
Discount Rate	3.75%	
Capital Recovery Factor	0.045	



## Wetland - Parametric Cost Estimate

**Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$500,000	\$500,000
Sand Fill	225,000	cu.yd.	\$20	\$4,500,000
Grass Plantings	1,000,000	each	\$2	\$2,000,000
<b>Subtotal</b>				<b>\$7,000,000</b>
Contingency	25%			\$1,750,000
<b>Total Construction</b>				<b>\$8,750,000</b>
E&D	12%			\$1,050,000
S&A	10%			\$875,000
<b>Total Estimated First Construction Cost</b>				<b>\$10,675,000</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$2,135.00</b>

Wetland Length                      5,000 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$95.17
O&M	0.5%	\$10.68
<b>Total Estimated Annual Average Cost</b>		<b>\$105.84</b>

Project Life                      50      Years  
Discount Rate                      3.75%  
Capital Recovery Factor                      0.045

**Oyster Reef - Parametric Cost Estimate****Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$250,000	\$250,000
Base Stone	82,500	ton	\$150	\$12,375,000
Oyster Reef Material	55,000	cu.yd	\$200	\$11,000,000
<b>Subtotal</b>				<b>\$23,625,000</b>
Contingency	25%			\$5,906,250
<b>Total Construction</b>				<b>\$29,531,250</b>
E&D	12%			\$3,543,750
S&A	10%			\$2,953,125
<b>Total Estimated First Construction Cost</b>				<b>\$36,028,125</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$7,205.63</b>

Reef Length                      5,000 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$321.19
O&M	0.0%	\$0.00
<b>Total Estimated Annual Average Cost</b>		<b>\$321.19</b>

Project Life                      50      Years

Discount Rate                  3.75%

Capital Recovery Factor        0.045

## Submerged Aquatic Vegetation (SAV) - Parametric Cost Estimate

**Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$500,000	\$500,000
Sand Fill	220,000	ton	\$20	\$4,400,000
SAV Plantings	750,000	each	\$4	\$3,000,000
<b>Subtotal Construction</b>				<b>\$7,900,000</b>
Contingency	25%			\$1,975,000
<b>Total Construction</b>				<b>\$9,875,000</b>
E&D	12%			\$1,185,000
S&A	10%			\$987,500
<b>Total Estimated First Construction Cost</b>				<b>\$12,047,500</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$2,409.50</b>

SAV Bed Length                      5,000 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$107.40
O&M	0.0%	\$0.00
<b>Total Estimated Annual Average Cost</b>		<b>\$107.40</b>

Project Life                      50      Years  
Discount Rate                      3.75%  
Capital Recovery Factor                      0.045



**Levee Parametric Cost Estimate**

Design Elevation Based on BFE 4 ft above grade plus 3 ft. Added 3 ft of Freeboard per FEMA Standard.

Typical costs based on weighted average of costs estimated for good and poor foundation conditions.

**Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$200,000	\$200,000
Levee Construction	1	Mile	\$4,966,932	\$4,966,932
Drainage Outlets	13	ea	\$35,000	\$455,000
<b>Subtotal</b>				<b>\$5,621,932</b>
Contingency	25%			<b>\$1,405,483</b>
<b>Total Construction</b>				<b>\$7,027,415</b>
E&D	12%			<b>\$843,290</b>
S&A	10%			<b>\$702,741</b>
<b>Total Estimated First Construction Cost</b>				<b>\$8,573,446</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$1,623.76</b>

Levee Length                      5,280 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$72.38
O&M	\$2/LF + \$10,000 per drain	\$9.40
<b>Total Estimated Annual Average Cost</b>		<b>\$81.78</b>

Project Life                      50      Years

Discount Rate                      3.75%

Capital Recovery Factor                      0.045

## Floodwall Parametric Cost Estimate

Design Elevation Based on BFE 4 ft above grade plus 3 ft. Added 3 ft of Freeboard per FEMA Standard.

Typical costs based on weighted average of costs estimated for good and poor foundation conditions.

**Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$200,000	\$200,000
Floodwall Construction	1	Mile	\$17,284,524	\$17,284,524
Drainage Outlets	13	ea	\$100,000	\$1,300,000
<b>Subtotal Construction</b>				\$18,784,524
Contingency	25%			\$4,696,131
<b>Total Construction</b>				<b>\$23,480,655</b>
E&D	12%			\$2,817,679
S&A	10%			\$2,348,065
<b>Total Estimated First Construction Cost</b>				<b>\$28,646,399</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$5,425.45</b>

Levee Length                      5,280 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$241.84
O&M	\$2/LF + \$10,000 per drainag	\$9.40
<b>Total Estimated Annual Average Cost</b>		<b>\$251.24</b>

Project Life                      50      Years

Discount Rate                      3.75%

Capital Recovery Factor                      0.045

**Deployable Floodwall Parametric Cost Estimate**

Design Elevation Based on BFE 3 ft above grade plus 3 ft.

Line of Protection 50% Permanent Floodwall, 50% Deployable Floodwall.

Typical floodwall costs based on weighted average of costs estimated for good and poor foundation conditions.

**Table 1. First Construction Quantities & Costs**

Item	Quantity		Parametric Estimate	
	Number	Unit	Unit Cost	Total Cost
Mob/demob	1	LS	\$200,000	\$200,000
Deployable Floodwall	1	0.5 Mile	\$10,780,000	\$10,780,000
Floodwall Construction	1	0.5 Mile	\$6,565,662	\$6,565,662
Stoplog Storage	1	ea	\$445,000	\$445,000
Drainage Outlets	13	ea	\$100,000	\$1,300,000
<b>Subtotal Construction</b>				<b>\$19,290,662</b>
Contingency	25%			\$4,822,665
<b>Total Construction</b>				<b>\$24,113,327</b>
E&D	12%			\$2,893,599
S&A	10%			\$2,411,333
<b>Total Estimated First Construction Cost</b>				<b>\$29,418,259</b>
<b>Total Estimated First Construction Cost per Foot</b>				<b>\$5,571.64</b>

Levee Length 5,280 ft

**Table 2. Annualized Costs per Foot - Parametric Estimate**

Annualized First Costs		\$248.35
O&M	\$2/LF + \$10,000 per drainage stru	\$9.40
O&M	Install/Dismantle Deployable Wal	\$5.11
<b>Total Estimated Annual Average Cost</b>		<b>\$262.86</b>

Project Life 50 Years

Discount Rate 3.75%

Capital Recovery Factor 0.045



E&D	10%
S&A	12%
Contingency	25%
Project Life	50
Discount Rate	3.75%

#### **Unit Costs**

Stone	150	\$/ton
Beach Fill	12	\$/cu.yd.
Geotextile	15	\$/sq.yd.
Fill Maintenance	15	\$/ft
Storm Surge Barrier	878	\$/cu.ft.
Sand Fill	20	\$/cu.yd.
Grass Plantings	2	\$/each
SAV Plantings	4	\$/each
Oyster Reef Material	200	\$/cu.yd.
Excavation	13	\$/cu.yd.

# Appendix 2:

## NNBF Case Studies

This appendix contains examples of NNBF similar to the NNBF explored in this report. The majority of these NNBF are built and/or under construction, though a few planning studies are also included. A significant percentage of these examples are located within the NJBB themselves. Collectively, they demonstrate the feasibility of NNBF techniques such as wetland creation, thin-layer placement, and living breakwaters. They have been organized by these types of techniques.

Unfortunately, though, because the majority of this work is recent, data demonstrating the precise CSRM benefits of individual case studies is generally not available yet. Monitoring and study is on-going at many of these sites, but it will take time for those benefits to be fully quantified and understood. In the interim, the primary means of demonstrating the CSRM benefits of NNBF is via reference to studies that have been conducted on the CSRM benefits of natural features such as coastal wetlands and dunes. Such studies are noted in Part II and cited in this document's references.

The text that describes each case study has been drawn from official project descriptions. These sources are noted on each individual case study.

# BENEFICIAL USE

## **Avalon thin-layer placement**

### **Location**

Avalon, New Jersey

### **Description**

45,000 cubic yards of dredged sediment was used to elevate 14 hectares of nearby marsh to height deemed suitable by project partners. The project was understood as a pilot experiment to study the various effects of thin-layer placement on marshes and monitor their physical and biologic development over time. The placement of material occurred between 2015 and 2016.

### **Project Partners**

U.S. Army Corps of Engineers  
The Nature Conservancy  
GreenVest  
The Wetlands Institute  
New Jersey DEP

### **Contact**

Monica Chasten  
United States Army Corps of Engineers  
Philadelphia District

Source: [https://doer.el.erdc.dren.mil/infographics/Bailey\\_et\\_al.pdf](https://doer.el.erdc.dren.mil/infographics/Bailey_et_al.pdf)

## BENEFICIAL USE:

### **Mordecai Island island restoration providing CSRM benefits**

#### **Location**

Beach Haven, New Jersey

#### **Description**

A 45-acre uninhabited coastal salt marsh island that supports a variety of breeding and migratory bird species, including the American Oystercatcher and the Black Skimmer. The island has significantly eroded, particularly on its northern side as a large cut developed. The island is adjacent to a section of the New Jersey Intracoastal Waterway that required dredging due to shoaling. Approximately 30,000 cubic yards of material was dredged from the New Jersey Intercoastal Waterway (NJIWW) between channel markers 107 and 108. The material was placed in the breached northern area of the island to the same elevation as the adjacent existing salt marsh vegetation.

#### **Project Partners**

U.S. Army Corps of Engineers

NJDEP Office of Dredging and Sediment Technology

NOAA

Land Trust

#### **Contact**

Monica Chasten

United States Army Corps of Engineers

Philadelphia District

Source: <https://www.nap.usace.army.mil/Portals/39/docs/Civil/Coastal/Mordecai-Island-Factsheet-December-2019.pdf?ver=2019-12-13-120440-430>; <https://www.nj.gov/dep/oculup/case-studies-projects/nj-ecol-solution-projects.html>



# BENEFICIAL USE

## Ring Island thin-layer placement

### Location

Stone Harbor, New Jersey

### Description

Ring Island is a wetland complex located within the back bay system behind Seven Mile Island in New Jersey. It was originally constructed in 2014 as nesting habitat for the black skimmer and least tern. Material was again added to the site in 2018 to expand/enhance the habitat. Bird surveys have confirmed nesting on the site by the black skimmer, the least and common tern, and the American oystercatcher. The larger Ring Island area is also planned for future beneficial re-use projects.

### Project Partners

U.S. Army Corps of Engineers  
The Wetlands Institute

### Contact

Monica Chasten  
United States Army Corps of Engineers  
Philadelphia District

Source: <https://www.nap.usace.army.mil/Portals/39/docs/Civil/Public%20Notice/Draft-NJIWW-Ring-Island-2018-EA.pdf?ver=2018-10-02-135410-530>

## BENEFICIAL USE

### Battery Island

#### Location

Havre de Grace, Maryland

#### Description

The primary objective of the Battery Island restoration project was to beneficially use dredged material to restore an eroded waterfowl nesting site and historic lighthouse in the Susquehanna National Wildlife Refuge. The island was restored to approximately 11 acres (above water) to support American black duck (*Anas rubripes*) and Caspian tern (*Hydroprogne caspia*) habitat, and to prevent the flooding of the historic Fishing Battery Lighthouse. Habitats restored were tidal marsh, intertidal marsh, high marsh, upland and submerged aquatic vegetation (SAV) that could support a variety of species. About 60,000 native plants were planted by USACE contractors to encourage establishment of native vegetation and to minimize establishment of invasive species (e.g., *Phragmites* spp.).

#### Project Partners

The USFWS

National Park Service

MDNR

Maryland Department of the Environment (MDE)

City of Havre de Grace

Hartford County, MD

#### Contact

Burton C. Sudel

USACE Engineer and Research and Development Center

Vicksburg, Mississippi

Source: [https://www.researchgate.net/publication/332330455\\_Realizing\\_Multiple\\_Benefits\\_in\\_US\\_Army\\_Corps\\_of\\_Engineers\\_USACE\\_Baltimore\\_District\\_Dredging\\_Projects\\_through\\_Application\\_of\\_Engineering\\_With\\_NatureR\\_Principles](https://www.researchgate.net/publication/332330455_Realizing_Multiple_Benefits_in_US_Army_Corps_of_Engineers_USACE_Baltimore_District_Dredging_Projects_through_Application_of_Engineering_With_NatureR_Principles)

# BENEFICIAL USE

## Poplar Island

### Location

Chesapeake Bay: Talbot County, Maryland

### Description

The Paul S. Sarbanes Ecosystem Restoration Project at Poplar Island (Poplar Island) is located in Talbot County, Maryland in the Chesapeake Bay. Poplar Island is approximately 30 miles south of Baltimore and is comprised of the existing island, 1140 acres, which is currently under construction. The Poplar Island project is the collaborative effort of many state and Federal agencies to provide habitat for fish and wildlife species. This remote island habitat is providing critical and unique habitat that is and will be used for nesting, foraging, resting, and reproduction in addition to providing a valuable placement location for the highly used Chesapeake Bay shipping channels. Habitats were specifically designed for attracting nesting terns and other priority species such as snowy egret, American black duck, and diamondback terrapin. Through 2019, 373 acres of tidal wetland have been created, 110 acres of open water embayments, and over 34 MCY of dredged material beneficially reused.

### Project Partners

Maryland DNR  
US Department of Fish and Wildlife  
Port of Baltimore  
Maryland Port Administration  
Maryland Department of Transportation

### Contact

United States Army Corps of Engineers  
Baltimore District  
2 Hopkins Plaza  
Baltimore, MD. 21201

Source: <https://www.nab.usace.army.mil/Portals/63/docs/Environmental/PoplarIsland/Lrr%20Report%202013/Final%20LRR%20Report%202013.pdf?ver=2018-11-20-133209-727>; <https://cdm16021.contentdm.oclc.org/digital/collection/p16021coll11/id/4295>

## BENEFICIAL USE

### Margate City

#### Location

Absecon Island Area, Margate City, Atlantic County, New Jersey

#### Description

Margate City in coordination with various partners are working to address, design and permit at least three sites for marsh restoration in the Absecon Island Area which may include raising the elevations of existing wetlands or creating new wetlands through the beneficial reuse of dredged material. The three marsh sites will be selected based on having aspects that fall under the restoration criteria. Once chosen the site will need a variety of further investigations including surveying, water quality data, and vegetation/habitat data. Additional sites may be identified, provided that they offer an ecological uplift through habitat restoration, natural hazard mitigation solutions and are able to receive the dredged material.

#### Project Partners

New Jersey Department of Environmental Protection (NJDEP)

U.S. Army Corps of Engineers

Stockton University Coastal Research Center

Margate City

#### Contact

Margate City

9001 Winchester Ave.

Margate, NJ 08402

(609) 822-2605

Source: NJDEP, <https://www.nj.gov/dep/oclup/case-studies-projects/nj-ecol-solution-projects.html>



# SHALLOWS

## Cedar Bonnet Island, Stafford Twp.

### Location

Cedar Bonnet Island, Stafford Township, Ocean County, New Jersey

### Description

A Coastal General Permit #29, NJDEP File #1530-14-0006.1, has been approved for this project. The project consists of a habitat restoration and enhancement on Cedar Bonnet Island, which will include the excavation of existing dredge spoils, the creation of intertidal/subtidal shallows, the enhancement of riparian zones and wetlands, the construction of tidal channels into the interior of the island, and the enhancement of the vegetative community on the island by removing invasive species and planting tidal wetland and maritime forest plant species. Also, a stone trail around the island and two 20' by 20' public access pavilions will be constructed.

### Project Partners

New Jersey Department of Transportation (NJDOT)

### Contact

NJDOT  
1035 Parkway Ave.  
Trenton, NJ 08625

Source: NJDEP, <https://www.nj.gov/dep/oclup/case-studies-projects/nj-ecol-solution-projects.html>

# SHALLOWS

## The Shallows

### Location

Hurricane Sandy affected areas including: Staten Island, Jamaica Bay, Hackensack, Long Island (NY), Raritan Bay, and Barnegat Bay

### Description

For the Rebuild by Design competition, the SCAPE team proposed the shallowing of a number of coastal areas that were affected by Hurricane Sandy. The Barnegat Bay shallowing strategy focused on beneficial dredge networks. The team proposes to forge new links within sediment cycles of the bay, layering strategies of absorptive edge creation, dredge wetland building, and habitat breakwater and reef building to step down risk for waterfront communities. Man-made and natural cycles will be considered in tandem, helping ensure a productive and resilient bay landscape for future generations. Hydrodynamic modeling with the Stevens Institute ADCIRC model suggest that these techniques may reduce flood water heights by 15-20% and reduce or eliminate wave damage within bay-side neighborhoods, all to be developed with further study. These techniques are not new—local and regional precedents exist for dredge wetland building within New York's Jamaica Bay and the Baltimore Harbor. A re-thinking of sediment cycles at the bay-scale, combined with absorptive edge creation and habitat breakwaters and reefs could have a dramatic impact on the Bay's protective ecological network, revitalizing an ecosystem and economy at risk of decline.

### Project Partners

SCAPE / LANDSCAPE ARCHITECTURE

Parsons Brinckerhoff

Stevens Institute Of Technology

Ocean And Coastal Consultants

Searc Consulting

The New York Harbor School

Lot-Ek

Mtwtf

Paul Greenberg

### Contact

SCAPE/LANDSCAPE ARCHITECTURE

277 Broadway, Ninth Floor

New York, NY 10007

212.462.2628

office@scapestudio.com

Source: The Shallows: Bay Landscapes as Ecological Infrastructure Report for the Rebuild by Design Competition. [https://www.hud.gov/sites/documents/THE\\_SHALLOWS.PDF](https://www.hud.gov/sites/documents/THE_SHALLOWS.PDF)

# DREDGE HOLE RESTORATION

## Dredge Hole 25, SAV Restoration

### Location

Barneget Bay off West Coast of Lavallette, Ocean County, New Jersey (39°58'15.0"N 74°04'37.0"W)

### Description

A Coastal General Permit #24, NJDEP File #1506-16-0056.1, has been approved for this project. The New Jersey Department of Transportation (NJDOT) Office of Maritime Resources has proposed the restoration of an ecologically impaired subaqueous borrow pit (dredged hole) and the restoration of Submerged Aquatic Vegetation (SAV) within the area of the dredged hole.

### Project Partners

New Jersey Department of Transportation  
New Jersey Department of Environmental Protection

### Contact

NJDOT Office of Maritime Resources  
1035 Parkway Ave.  
Trenton, NJ 08625

Source: NJDEP, <https://www.nj.gov/dep/oclupe/case-studies-projects/nj-ecol-solution-projects.html>

## DREDGE HOLE RESTORATION

### Dredge Hole 18, SAV Restoration

#### **Location**

Long Island Cove off West Coast of Brick Beach, Ocean County, New Jersey (40°00'35.0"N 74°03'42.0"W)

#### **Description**

A Coastal General Permit #24, NJDEP File #1506-16-0055.1, has been approved for this project. The New Jersey Department of Transportation (NJDOT) Office of Maritime Resources has proposed the restoration of an ecologically impaired subaqueous borrow pit (dredged hole) and the restoration of Submerged Aquatic Vegetation (SAV) within the area of the dredged hole.

#### **Project Partners**

New Jersey Department of Transportation  
New Jersey Department of Environmental Protection

#### **Contact**

NJDOT Office of Maritime Resources  
1035 Parkway Ave.  
Trenton, NJ 08625

Source: NJDEP, <https://www.nj.gov/dep/oclup/case-studies-projects/nj-ecol-solution-projects.html>



# LIVING BREAKWATERS

## Living Breakwaters

### Location

Tottenville, Staten Island, NYC

### Description

Living Breakwaters originated as one of the winning teams in the Rebuild by Design competition led by SCAPE. The project is currently being implemented by the Governor's Office of Storm Recovery (GOSR) with \$60 million of CDBG-DR funding. Planned for the neighborhood of Tottenville, Staten Island, the project links in-water infrastructure with on-shore education and outreach, to help increase awareness of risk, enhance ecologies, and bring local school curriculum to the waterfront. SCAPE was commissioned by the GOSR to lead the schematic design process with a strong coalition of ecological and engineering partners, iteratively testing and designing scenarios for breakwater height, width, and location along the Tottenville shoreline. The team has worked closely with members of the community to create a design that benefits the community while positively affecting regional ecosystems and resiliency efforts. The schematic design process incorporates hydrodynamic and wave modeling, ecological data collection, active community feedback, agency coordination, and constructability assessment.

### Project Partners

SCAPE/LANDSCAPE ARCHITECTURE

Parsons Brinckerhoff

ARCADIS

Ocean and Coastal Consultants

SeArc Ecological Marine Consulting

The New York Harbor Foundation

LOT-EK Architecture

MFS Consulting Engineers

Prudent Engineering

### Contact

SCAPE/LANDSCAPE ARCHITECTURE

277 Broadway, Ninth Floor

New York, NY 10007

212.462.2628

office@scapestudio.com

Source: <https://www.scapestudio.com/projects/living-breakwaters-design-implementation/>

## HORIZONTAL LEVEE

### Oro Loma Horizontal Levee

#### Location

Long Island Cove off West Coast of Brick Beach, Ocean County, New Jersey (40°00'35.0"N 74°03'42.0"W)

#### Description

The Oro Loma Horizontal Levee Project is a multi-agency and multi-jurisdictional project combining the expertise of numerous project partners to address multiple functions for the Oro Loma wastewater treatment facility. The \$9.1 million Horizontal Levee Project took approximately two years to complete, and will be monitored post-construction to evaluate its success. The project converted a ten-acre field along the Bay's edge into an eight-million gallon holding basin connected to an adjacent horizontal levee. Water entering the treatment facility will first go through a conventional treatment process and then pumped into a wet weather treatment basin. The water will then seep into the adjacent horizontal levee for additional treatment. The horizontal levee tests multiple functions including adaptive strategies for climate change and sea level rise, filtration of wastewater, as well as provide native habitat along the ecotone slope. Unlike a traditional levee with a 1:1 slope, the horizontal levee designed by ESA is a 30:1 slope. The levee slope comprises 12 different "experimental beds" referred to as "cells", containing several mixtures of substrates and vegetation/habitat types.

#### Project Partners

Oro Loma and Castro Valley Sanitary Districts  
ESA Associates  
Peter Baye  
Whitley Burchett and Associates  
ReNU-Wit  
The Bay Institute  
David Sedlak and Alex Horne, UC Berkeley  
The Bay Institute  
Save The Bay

#### Contact

Oro Loma Sanitary District  
2655 Grant Ave  
San Lorenzo, CA 94580  
(510) 276-4700  
info@OroLoma.org

Source: <https://oroloma.org/horizontal-levee-project/>; <http://www.oroloma.org/wp-content/uploads/horizontallevee-overview>

# LIVING SHORELINES

## Little Egg Harbor

### Location

Great Bay Boulevard Wildlife Management Area, Little Egg Harbor Township, Ocean County,  
New Jersey

### Description

Little Egg Harbor Township proposes the construction of 100,000 square feet of new living shoreline along 2,500 linear feet of severely damaged coastline, addressing erosion and water quality issues in the tidally influenced areas of the Barnegat Bay and Great Bay Watershed Management Areas. The two locations for the living shorelines include the Mystic Island Preserve along Iowa Court at Mystic Island (Project A) and the Great Bay Boulevard Wildlife Management Area at Big Thorofare inlet (Project B).

### Project Partners

National Fish and Wildlife Foundation (NFWF)  
New Jersey Future  
The New Jersey Corporate Wetlands Restoration Partnership  
The Barnegat Bay Partnership (BBP)

### Contact

Garrett Loesch, Administrator and Finance Officer  
Administrative Justice Complex  
665 Radio Rd.  
Little Egg Harbor, NJ 08087  
(609) 296-7241, Ext. 220  
loesch@leht.com

Source: NJDEP, <https://www.nj.gov/dep/oclup/case-studies-projects/nj-ecol-solution-projects.html>

## LIVING SHORELINES

### West Wildwood Living Shoreline

#### Location

West 26th Avenue Peninsula, West Wildwood, Cape May County, New Jersey

#### Description

The project proposes the construction of a living shoreline and marsh restoration to seek the stabilization of the coastline, increase terrestrial and marine habitat, and improve the overall resiliency of the area and the 40 homes affected by recurring nuisance flooding. The Nature Conservancy also hopes to apply NJDEP's emerging Citizen Science framework to engage the community in the caretaking of the project beyond the life of the NOAA grant. The design and permitting of the project is ongoing from what started in 2017, building off the project's conceptual design. The first year of the project will be dedicated to baseline monitoring, social science data collection, and engagement of the local community to facilitate their participation in several aspects of the project. The second year will be focus on construction, and post-construction monitoring. The final year of the project will be focused on additional monitoring and adaptive maintenance, as well as implementing citizen science engagement and handoff of the project to community caretakers/stakeholders.

#### Project Partners

The Nature Conservancy

New Jersey Department of Environmental Protection (NJDEP)

National Oceanic and Atmospheric Administration (NOAA) Coastal Resilience Grants Program

#### Contact

Patricia Doerr, Director of Coastal and Marine Program, The Nature Conservancy  
2350 Route 47  
Elmont, NJ 08314  
(609) 861-4123  
[pdoerr@tnc.org](mailto:pdoerr@tnc.org)

Christopher Ridings, Business Administrator / Office of Emergency Management, Borough of West Wildwood  
701 W. Glenwood Ave.  
West Wildwood, NJ  
(609) 522-4845, Ext. 308  
[cridings@westwildwood.org](mailto:cridings@westwildwood.org)

Source: NJDEP, <https://www.nj.gov/dep/oclup/case-studies-projects/nj-ecol-solution-projects.html>



# LIVING SHORELINES

## Little Egg Harbor

### Location

Great Bay Boulevard Wildlife Management Area, Little Egg Harbor Township, Ocean County,  
New Jersey

### Description

Little Egg Harbor Township proposes the construction of 100,000 square feet of new living shoreline along 2,500 linear feet of severely damage coastline, addressing erosion and water quality issues in the tidally influenced areas of the Barnegat Bay and Great Bay Watershed Management Areas. The two locations for the living shorelines include the Mystic Island Preserve along Iowa Court at Mystic Island (Project A) and the Great Bay Boulevard Wildlife Management Area at Big Thorofare inlet (Project B).

### Project Partners

National Fish and Wildlife Foundation (NFWF)  
New Jersey Future  
The New Jersey Corporate Wetlands Restoration Partnership  
The Barnegat Bay Partnership (BBP)

### Contact

Garrett Loesch, Administrator and Finance Officer  
Administrative Justice Complex  
665 Radio Rd.  
Little Egg Harbor, NJ 08087  
(609) 296-7241, Ext. 220  
loesch@leht.com

Source: NJDEP, <https://www.nj.gov/dep/oclup/case-studies-projects/nj-ecol-solution-projects.html>

This report covers findings from cooperative agreement W912HZ-18-2-0008 **Incorporating Engineering With Nature® (EWN®) and Landscape Architecture (LA) Designs into Existing Infrastructure Projects**, an agreement between the **U.S. Army Engineering Research Development Center (ERDC)** and **Auburn University (AU)** for FY2020.

This report has been prepared by the investigators at **Auburn University**, the **University of Toronto**, and the **University of Pennsylvania**; it also incorporates text and insights from ERDC's **Engineering With Nature®** project team.

<http://engineeringwithnature.org>

<http://dredgeresearchcollaborative.org/>

